

6427525 N E C ELECTRONICS INC

05E 22772 D

BIPOLAR ANALOG INTEGRATED CIRCUIT **μ PC1238V, μ PC1238H****10 W AF POWER AMPLIFIER**

T-74-05-01

The μ PC1238 is an audio power amplifier designed for median Hi-Fi stereo set and TV set sound power amplifier.


This device can provide 8.4 watts to 8 ohm at 1 % T.H.D. and ± 13 V supply voltage.

The μ PC1238 incorporates the thermal protection circuit to protect the damage of IC chip against load damping etc.

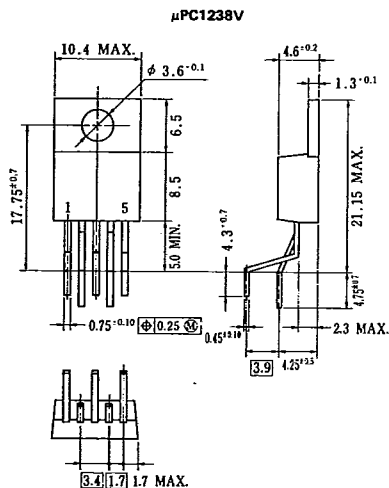
Since the package is a 5 Pin TO-220 package, it greatly simplifies construction of a power amplifier both in design and assembly.

FEATURES

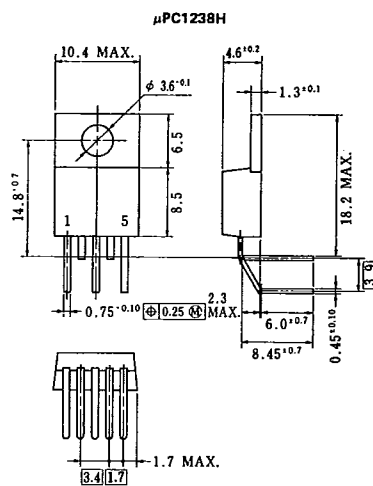
- High output power
 - 8.4 W TYP. (at 8 Ω , $V_{CC} = \pm 13$ V)
 - 12.5 W TYP. (at 4 Ω , $V_{CC} = \pm 13$ V)
- Low T.H.D.
 - 0.012 % TYP. ($P_{out} = 2$ W, $R_L = 8 \Omega$)
 - 0.02 % TYP. ($P_{out} = 2$ W, $R_L = 4 \Omega$)
- Low equivalent input noise voltage.
- Available for NFB tone control mode.
- Negligible power ON/OFF noise.
- High density components assembly due to 5 Pin TO-220 package.

CONNECTION DIAGRAM

Pin No.	Electrical Connection
1	Non inverting input
2	Inverting input
3	-VCC
4	Output
5	+VCC

PACKAGE DIMENSIONS (Unit: mm)

PSVP-140B2



PSVP-140B1

6427525 N E C ELECTRONICS INC

 μ PC1238V, μ PC1238H
05E 22773 D

T-74-05-01

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage (Quiescent)	V_{CC}	± 18	V
Supply Voltage (Operational)	V_{CC}	± 15	V
Circuit Current	$I_{CC(\text{peak})}$	4	A
Package Dissipation	P_D	*25	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Operating Temperature	T_{opt}	-20 to +65	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +150	$^\circ\text{C}$
Thermal Resistance Junction to Case	$R_{th(j-c)}$	3.4	$^\circ\text{C/W}$

* $T_{\text{tab}} = 65^\circ\text{C}$ RECOMMENDED OPERATING CONDITIONS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Supply	V_{CC}	± 6	± 13	± 15	V
Terminated Input Resistance	R_{IN}	47	56	100	k Ω
Closed Loop Voltage Gain	A_v	20	35		dB
Load Impedance	R_L	4	8		Ω

ELECTRICAL CHARACTERISTICS

(Refer to the test circuit : $T_a = 25^\circ\text{C}$, $V_{CC} = \pm 13\text{ V}$, $A_v = 35\text{ dB}$, $R_G = 600\ \Omega$, $R_L = 8\ \Omega$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Output Offset Voltage	V_{OFF}	-100	0	+100	mV	No Signal
Circuit Current	I_{CC}	30	60	130	mA	No Signal
Output Power	P_O	7	8.4		W	T.H.D. = 1 %, $f = 1\text{ kHz}$
Total Harmonic Distortion	T.H.D.		0.2	1	%	$f = 40\text{ Hz} - 15\text{ kHz}$ $P_O = 0.1 - 7\text{ W}$
Open Loop Voltage Gain	A_{VO}		83		dB	$P_O = 0.1\text{ W}$, $f = 500\text{ Hz}$
Equivalent Input Noise Voltage	V_{NI}		3	10	$\mu\text{V}_{r.m.s.}$	$R_G = 2.2\text{ k}\Omega$ $f = 40\text{ Hz} - 15\text{ kHz} (-3\text{ dB})$
Power Band Width	P.B.W.		75		kHz	$P_O = 0.1\text{ W}$, -3 dB
Supply Voltage Rejection Ratio	S.V.R.	45	51		dB	$f = 100\text{ Hz}$, $R_G = 2.2\text{ k}\Omega$

5

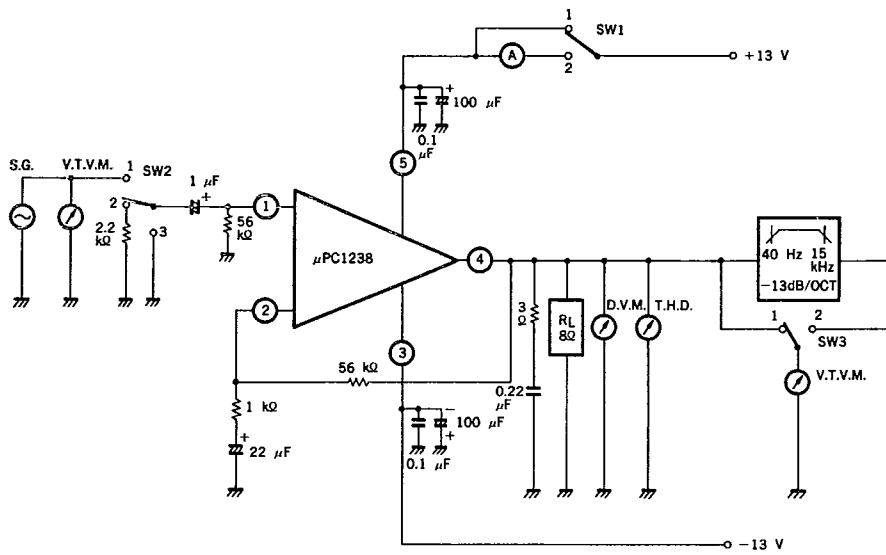
μ PC1238V, μ PC1238H

6427525 N E C ELECTRONICS INC

05E 22774 D

TEST CIRCUIT & TYPICAL APPLICATIONS

T-74-05-01



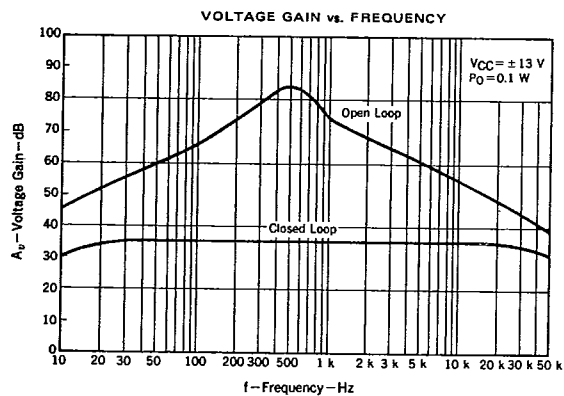
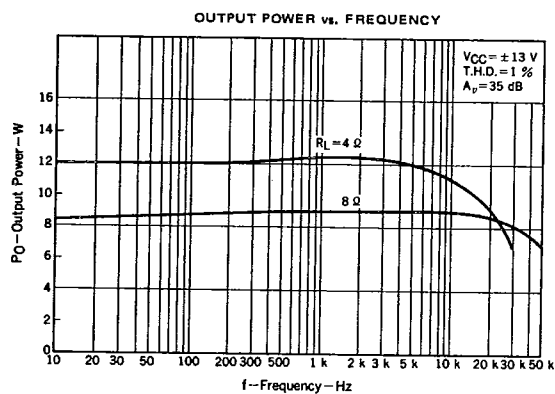
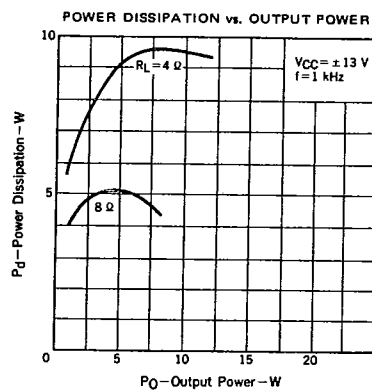
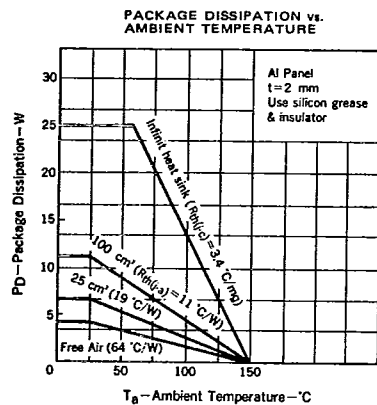
Switch Position

TEST ITEM	SYMBOL	SW1.	SW2.	SW3.
Output Offset Voltage	V_{OFF}	1	3	1
Circuit Current	I_{CC}	2	3	1
Output Power	P_O	1	1	1
Total Harmonic Distortion	T.H.D.	1	1	1
Equivalent Input Noise Voltage	V_{NI}	1	2	2
Supply Voltage Rejection Ratio	S.V.R.	1	2	1

6427525 N E C ELECTRONICS INC

 μ PC1238V, μ PC1238H
05E 22775 D

T-74-05-01

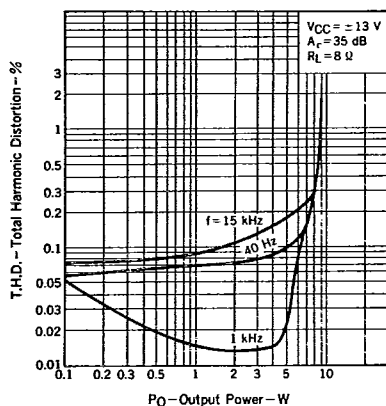
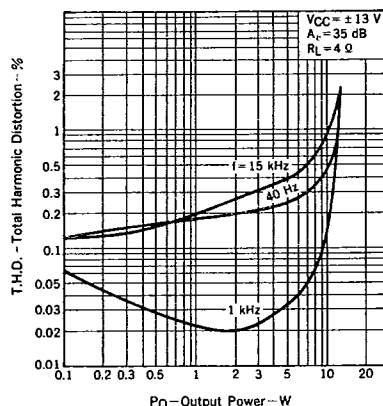
TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

μ PC1238V, μ PC1238H

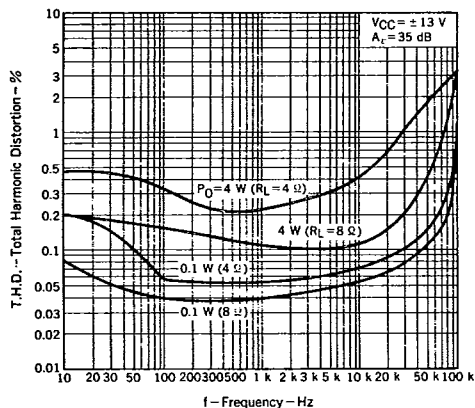
6427525 N E C ELECTRONICS INC

05E 22776 D

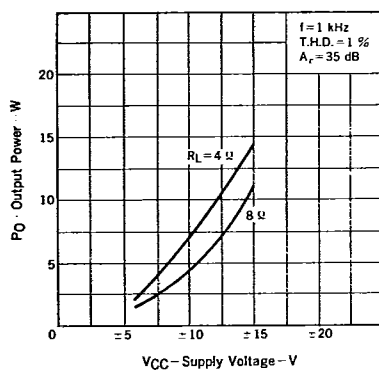
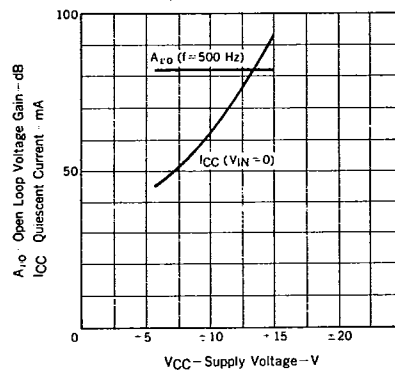
T-74-05-01

TOTAL HARMONIC DISTORTION vs.
OUTPUT POWERTOTAL HARMONIC DISTORTION vs.
OUTPUT POWER

TOTAL HARMONIC DISTORTION vs. FREQUENCY



OUTPUT POWER vs. SUPPLY VOLTAGE

OPEN LOOP VOLTAGE GAIN,
CIRCUIT CURRENT vs. SUPPLY VOLTAGE

6427525 N E C ELECTRONICS INC

 μ PC1238V, μ PC1238H
05E 22777 D

T-74-05-01

