
2SK1056, 2SK1057, 2SK1058

Silicon N-Channel MOS FET

HITACHI

November 1996

Application


Low frequency power amplifier

Complementary pair with 2SJ160, 2SJ161 and 2SJ162

Features

- Good frequency characteristic
- High speed switching
- Wide area of safe operation
- Enhancement-mode
- Good complementary characteristics
- Equipped with gate protection diodes
- Suitable for audio power amplifier

Outline

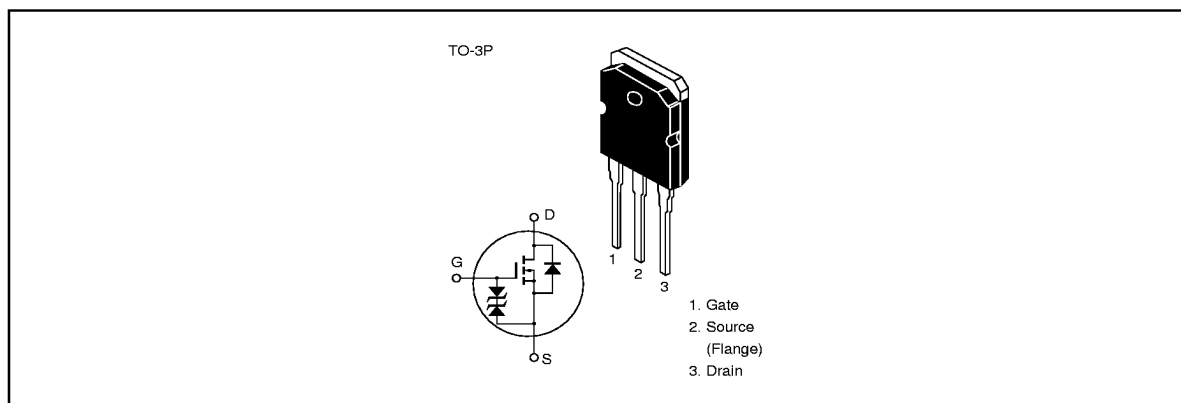

2SK1056, 2SK1057, 2SK1058

Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Ratings	Unit
Drain to source voltage	2SK1056	V_{DSX}	120	V
	2SK1057		140	
	2SK1058		160	
Gate to source voltage		V_{GSS}	±15	V
Drain current		I_D	7	A
Body to drain diode reverse drain current		I_{DR}	7	A
Channel dissipation		P_{ch}^{*1}	100	W
Channel temperature		T_{ch}	150	°C
Storage temperature		T_{stg}	−55 to +150	°C









Notes 1. Value at $T_c = 25^\circ\text{C}$

Electrical Characteristics (Ta = 25°C)

Item		Symbol	Min	Typ	Max	Unit	Test conditions
Drain to source breakdown voltage	2SK1056	$V_{(BR)DSX}$	120	—	—	V	$I_D = 10 \text{ mA}$, $V_{GS} = -10 \text{ V}$
	2SK1057		140	—	—		
	2SK1058		160	—	—		
Gate to source breakdown voltage		$V_{(BR)GSS}$	±15	—	—	V	$I_G = \pm 100 \mu\text{A}$, $V_{DS} = 0$
Gate to source cutoff voltage		$V_{GS(off)}$	0.15	—	1.45	V	$I_D = 100 \text{ mA}$, $V_{DS} = 10 \text{ V}$
Drain to source saturation voltage		$V_{DS(sat)}$	—	—	12	V	$I_D = 7 \text{ A}$, $V_{GD} = 0^{*1}$
Forward transfer admittance		$ y_{fs} $	0.7	1.0	1.4	S	$I_D = 3 \text{ A}$, $V_{DS} = 10 \text{ V}^{*1}$
Input capacitance		C_{iss}	—	600	—	pF	$V_{GS} = -5 \text{ V}$, $V_{DS} = 10 \text{ V}$, $f = 1 \text{ MHz}$
Output capacitance		C_{oss}	—	350	—	pF	
Reverse transfer capacitance		C_{rss}	—	10	—	pF	
Turn-on time		t_{on}	—	180	—	ns	
Turn-off time		t_{off}	—	60	—	ns	$V_{DD} = 20 \text{ V}$, $I_D = 4 \text{ A}$,

Note 1. Pulse test

2SK1056, 2SK1057, 2SK1058

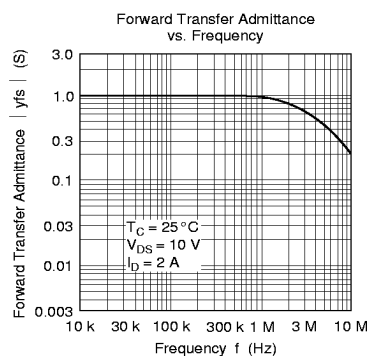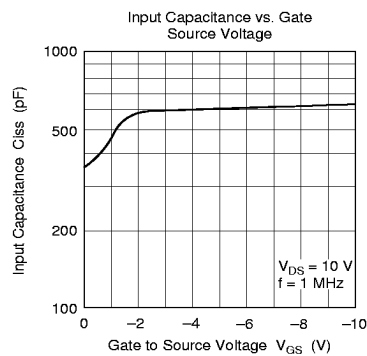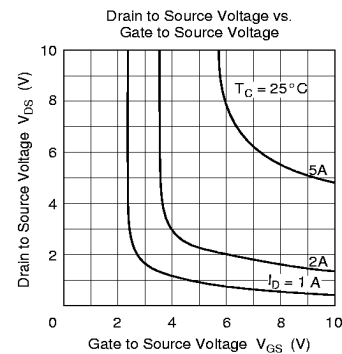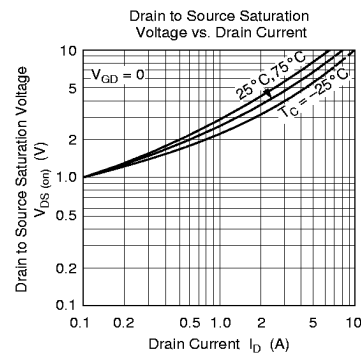

HITACHI

2SK1056, 2SK1057, 2SK1058

