

Xeon 5 Power White LED

OSXXX2E5E1E

VER C.1

■ Features


- Highest Luminous Flux
- Super Energy Efficiency
- Long Lifetime Operation
- Superior ESD protection
- Superior UV Resistance

■ Applications


- Read lights (car, bus, aircraft)
- Portable (flashlight, bicycle)
- Bollards / Security / Garden
- Traffic signaling / Beacons
- In door / Out door Commercial lights
- · Automotive Ext

■ Absolute Maximum Rating (Ta=25)

Value Unit Item Symbol White/ Warm white DC Forward Current 800 I_F mA Pulse Forward Current* $I_{FP} \\$ 1000 mA 10 V Reverse Voltage $V_{R} \\$ Power Dissipation 6400 mW P_{D} **-**30 ~ +85 Operating Temperature Topr **-40**~ +100 Storage Temperature Tstg Lead Soldering Temperature Tsol 260 /5sec

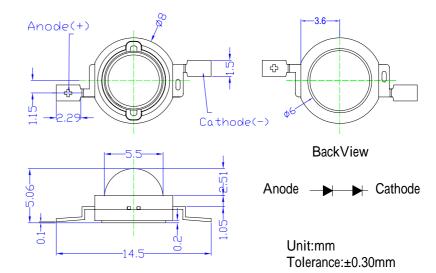

■Directivity

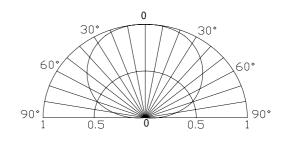

■ Electrical -Optical Characteristics (Ta=25)

- ====================================	0		-2	1										
Part Number	Color		$V_{F}(V)$			$I_R(\mu A)$	CCT	Lu	Luminous Flux		λD(nm)		2θ1/2	
							(K)	v (lm)					(deg)	
			Min.	Тур.	Max.	Max.	Тур	Min	Тур.	Max.	Min.	Тур.	Max.	
			I _F =700mA			$V_R=10V$	$I_F=700 \text{mA}$							
OSW4X2E5E1E	Pure White	W4	6.5	7.0	8.0	10	6500	300	320	-	X=0.	31 ,Y=	0.33	140
OSM5X2E5E1E	Warm White	M5	6.5	7.0	8.0	10	3000	280	300	-	X=0.	X=0.45,Y=0.41		140

Note: Don't drive at rated current more than 5s without heat sink for Xeon 5 emitter series.

LED & Application Technologies











http://www.optosupply.com VER C.1

^{*}Pulse width Max.10ms Duty ratio max 1/10



Xeon 5 Power White LED

OSXXX2E5E1E


VER C.1

■ Handling of Silicone Lens LEDs

Notes for handling of silicone lens LEDs

- Please do not use a force of over 3kgf impact or pressure on the silicone lens, otherwise it will cause a catastrophic failure.
- The LEDs should only be picked up by making contact with the sides of the LED body.
- Avoid touching the silicone lens especially by sharp tools such as Tweezers.
- Avoid leaving fingerprints on the silicone lens.
- Please store the LEDs away from dusty areas or seal the product against dust.
- When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the silicone lens must be prevented.
- Please do not mold over the silicone lens with another resin. (epoxy, urethane, etc)



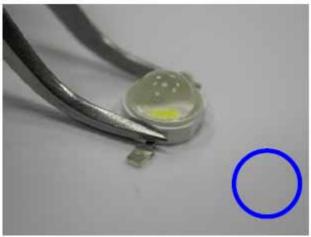











http://www.optosupply.com VER C.1