

mm inch

### FEATURES

- Sealed to meet the combination process of automatic wave soldering and cleaning needs
- Latching types available
- High switching capacity and high sensitivity in subminiature size  
150 mW pick-up, 8 A inrush capacity: 51 A for 1a1b, 35 A for 2a
- High shock and vibration resistance  
Shock: 20 G, Vibration: 10 to 55 Hz at double amplitude of 2 mm

### SPECIFICATIONS

#### Contacts

Arrangement	1 Form A 1 Form B	2 Form A	
Contact material	Au-flashed AgCdO		
Initial contact resistance, max.	30 mΩ		
Rating (resistive)	Max. switching power	2,000 VA, 150 W	
	Max. switching voltage	380 V AC, 250 V DC	
	Max. switching current	8 A	
	Min. switching capacity <sup>#1</sup>	100 mA, 5 V DC	
HP rating	1/4 HP 125, 250 V AC		
Inrush current capability	51 A (TV-3 equivalence) for 1a1b 35 A (TV-1 equivalence) for 2a		
Expected life (min. operations)	Mechanical (at 180 cpm)	10 <sup>7</sup>	
	Electrical	8 A 250 V AC (resistive)	10 <sup>5</sup>
		5 A 30 V DC (resistive)	2 × 10 <sup>5</sup>
		3 A 100 V AC (lamp)	3 × 10 <sup>4</sup>
		1 A 100 V AC (lamp)	—

#### Coil (polarized) (at 25°C 77°F)

Single side stable	Nominal operating power	Approx. 240 mW
Latching	Nominal set and reset power	Approx. 240 mW

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 Measurement at same location as "Initial breakdown voltage" section
- \*2 Detection current: 10 mA
- \*3 Wave is standard shock voltage of  $\pm 1.2 \times 50\mu\text{s}$  according to JEC-212-1981
- \*4 Excluding contact bounce time
- \*5 Half-wave pulse of sine wave: 11ms; detection time: 10 $\mu\text{s}$
- \*6 Half-wave pulse of sine wave: 6ms
- \*7 Detection time: 10 $\mu\text{s}$
- \*8 Refer to 6. Conditions for operation, transport and storage mentioned in [AMBIENT ENVIRONMENT \(p. 19, Relay Technical Information\)](#).


#### Characteristics (at 25°C 77°F 50% Relative humidity)

Max. operating speed	20 cpm (at rated load)	
Initial insulation resistance*1	1,000 MΩ (at 500 V DC)	
Initial breakdown voltage*2	Between contact sets	2,000 Vrms
	Between open contacts	1,200 Vrms
	Between contacts and coil	3,750 Vrms
Surge voltage between coil and contact*3	Min. 6,000 V	
Operate time*4 (at nominal voltage)	Max. 15 ms (Approx. 10 ms)	
Release time (without diode)*4 (at nominal voltage)	Max. 10 ms (Approx. 8 ms)	
Set time*4 (latching) (at nominal voltage)	Max. 10 ms (Approx. 8 ms)	
Reset time*4 (latching) (at nominal voltage)	Max. 10 ms (Approx. 8 ms)	
Temperature rise (at 60°C)	Max. 55°C with nominal coil voltage and at 8 A switching current	
Shock resistance	Functional*5	Min. 196 m/s <sup>2</sup> {20 G}
	Destructive*6	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*7	117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2 mm
	Destructive	176.4 m/s <sup>2</sup> {18 G}, 10 to 55 Hz at double amplitude of 3 mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +60°C -40°F to +140°F
	Humidity	5 to 85% R.H.
Unit weight	Approx. 10g .353 oz	

### TYPICAL APPLICATIONS

Sequence controllers, facsimiles, telephone controls, remote control security devices and security equipment.

## ORDERING INFORMATION

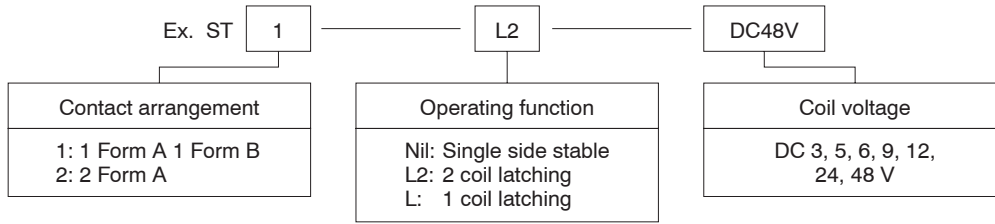

(Note) Standard packing: Carton; 50 pcs., Case; 500 pcs.

## TYPES AND COIL DATA (at 20°C 68°F)

## Single side stable

Part No.		Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Maximum allowable voltage, V DC (60°C 140°F)	Coil resistance, Ω (±10%)	Nominal operating current, mA
1 Form A 1 Form B	2 Form A						
ST1-DC3V	ST2-DC3V	3	2.4	0.3	4.5	38	78.9
ST1-DC5V	ST2-DC5V	5	4.0	0.5	7.5	105	47.6
ST1-DC6V	ST2-DC6V	6	4.8	0.6	9.0	150	40
ST1-DC9V	ST2-DC9V	9	7.2	0.9	13.5	360	25
ST1-DC12V	ST2-DC12V	12	9.6	1.2	18.0	600	20
ST1-DC24V	ST2-DC24V	24	19.2	2.4	36.0	2,400	10
ST1-DC48V	ST2-DC48V	48	38.4	4.8	72.0	9,000	5.3


## 1 coil latching

Part No.		Nominal voltage, V DC	Set and reset voltage, V DC (max.)	Maximum allowable voltage, V DC (60°C 140°F)	Coil resistance, Ω (±10%)	Nominal operating current, mA
1 Form A 1 Form B	2 Form A					
ST1-L1-DC3V	ST2-L1-DC3V	3	2.4	4.5	80	37.5
ST1-L1-DC5V	ST2-L1-DC5V	5	4.0	7.5	230	21.7
ST1-L1-DC6V	ST2-L1-DC6V	6	4.8	9.0	330	18.2
ST1-L1-DC9V	ST2-L1-DC9V	9	7.2	13.5	730	12.3
ST1-L1-DC12V	ST2-L1-DC12V	12	9.6	18.0	1,300	9.2
ST1-L1-DC24V	ST2-L1-DC24V	24	19.2	36.0	5,000	4.8
ST1-L1-DC48V	ST2-L1-DC48V	48	38.4	72.0	18,000	2.7


## 2 coil latching

Part No.		Nominal voltage, V DC	Set and reset voltage, V DC (max.)	Maximum allowable voltage, V DC (60°C 140°F)	Coil resistance, Ω (±10%)	Nominal operating current, mA
1 Form A 1 Form B	2 Form A					
ST1-L2-DC3V	ST2-L2-DC3V	3	2.4	4.5	40	75
ST1-L2-DC5V	ST2-L2-DC5V	5	4.0	7.5	110	45.5
ST1-L2-DC6V	ST2-L2-DC6V	6	4.8	9.0	155	38.7
ST1-L2-DC9V	ST2-L2-DC9V	9	7.2	13.5	360	25
ST1-L2-DC12V	ST2-L2-DC12V	12	9.6	18.0	640	18.8
ST1-L2-DC24V	ST2-L2-DC24V	24	19.2	36.0	2,400	10
ST1-L2-DC48V	ST2-L2-DC48V	48	38.4	72.0	10,200	4.7

# DIMENSIONS

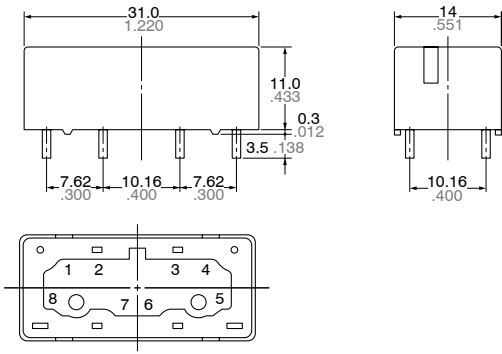


General tolerance:  $\pm 0.2 \pm 0.008$   
 PC board pattern  
 (Copper-side view)

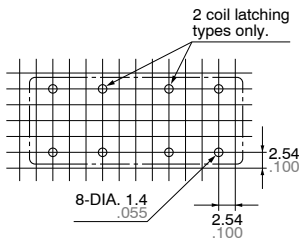

Tolerance:  $\pm 0.1 \pm 0.004$

## Schematics (Bottom view)

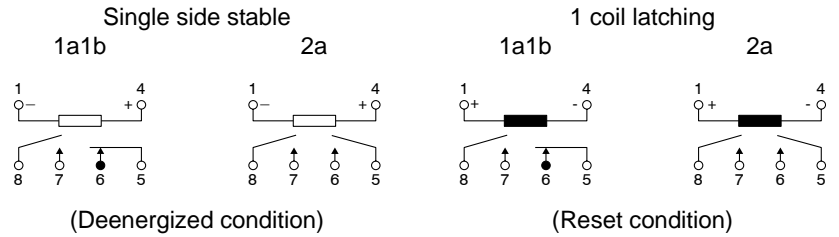

Diagrams show the "reset" position when terminals 1 and 4 are energized.


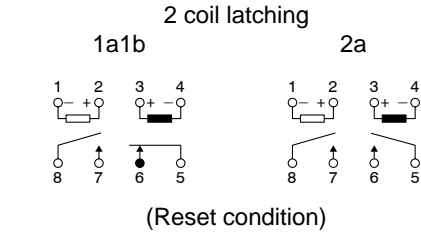



Diagram shows the "reset" position when terminals 3 and 4 are energized. Energize terminals 1 and 2 to transfer contacts.

# REFERENCE DATA

### 1. Max. switching power

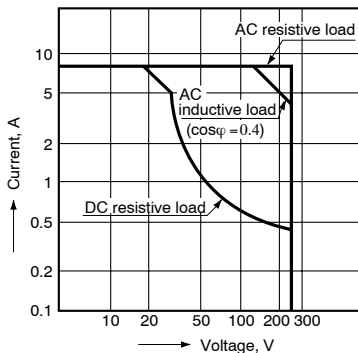


### 2. Life curve

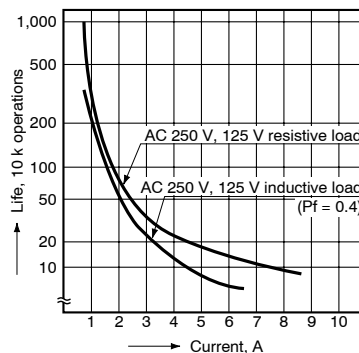


### 3. Coil temperature rise

Sample: ST1-DC24V

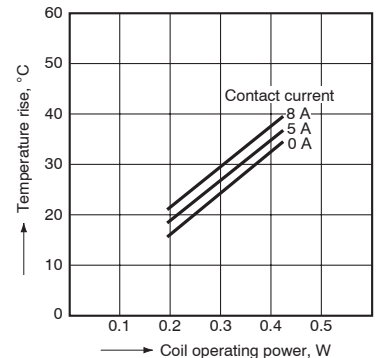


### 4. Influence of adjacent mounting


Sample: ST1-DC24V

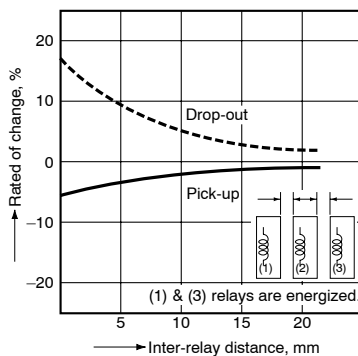

### 5. Max. ambient temperature by operating power

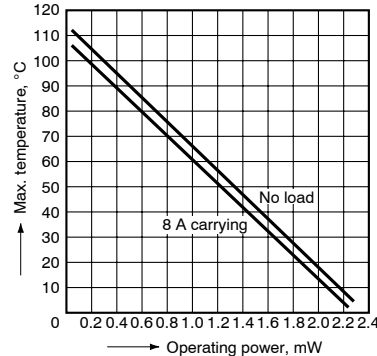

### 6. Contact reliability

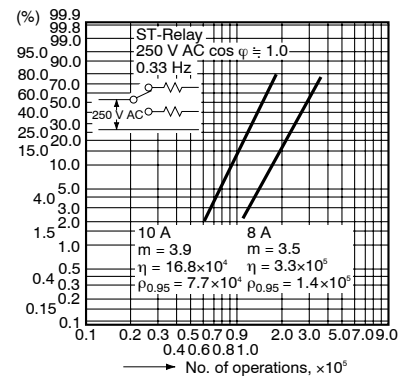

ST relay socket



ST-SS  
Solder terminal socket




ST-PS  
PC board terminal socket

Specifications

Breakdown voltage	4,000 Vrms Coil/Contacts 2,000 Vrms Contacts/Contacts
Insulation resistance	More than 1,000 MΩ between terminals
Heat resistance	150°C (302°F) for 1 hr
Max. continuous current	10 A
Relay insertion life	15 times


DIMENSIONS

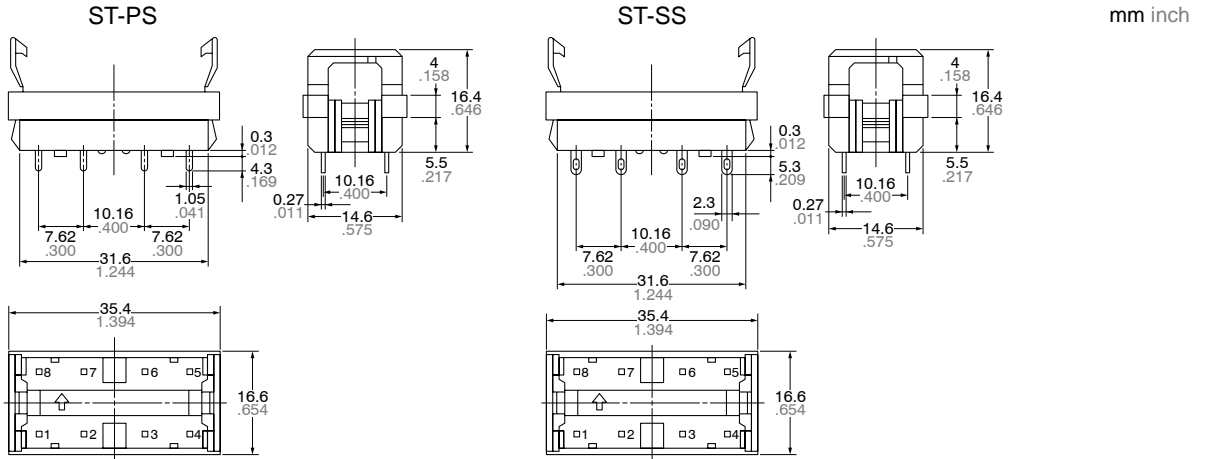

Precautions for use (socket)

1. PC board mounting method


PC board pattern

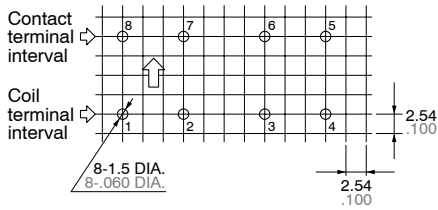

The terminal configuration is symmetrical on the left and right, so an arrow mark ; is stamped on the socket to prevent mis-insertion. We recommend printing the same arrow mark ; on the component mounting side (side opposite from pattern) of the PC board. In this case, the terminal nos. noted near the drilling holes.

2. Chassis cutout


Chassis cutting dimensions

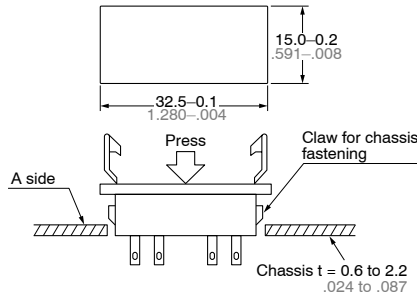


If the chassis hole is punched with a press, set so the release R on the front side (A side).  
The range for chassis thickness is 0.6 to 2.2 mm .024 to .087 inch.

3. Relay mounting and removal


(1) Align the directions of the relay and socket.



(2) Insert the relay all the way in, so it is securely in place.



(3) Press the part indicated by A in the B direction, and fasten by placing the hook on the relay.

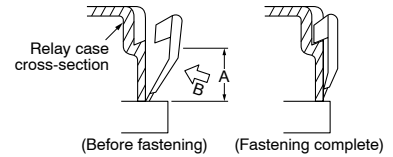


(4). When removing the relay, completely release the hooks on both sides and pull the relay out.

For Cautions for Use, see [Relay Technical Information](#).

**Panasonic**  
ideas for life

**CADMIUM-FREE IC  
DRIVABLE PC BOARD  
RELAY FOR FIELD LOAD  
SWITCHING**

**ST RELAYS  
(Special Type)**

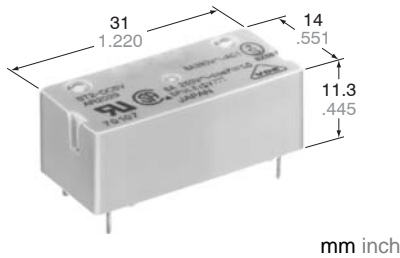

mm inch

### FEATURES

- Sealed to meet the combination process of automatic wave soldering and cleaning needs
- Latching types available
- High switching capacity and high sensitivity in subminiature size  
**150 mW pick-up, 8 A inrush capacity: 51 A for 1a1b, 35 A for 2a**
- High shock and vibration resistance  
**Shock: 20 G, Vibration: 10 to 55 Hz at double amplitude of 2 mm**

### About Cd-free contacts

We have introduced cadmium-free type products to reduce environmentally hazardous substances. Please replace parts containing cadmium with Cd-free products and evaluate them with your actual application before use because the life of a relay depends on the contact material and load.

### SPECIFICATIONS

#### Contacts

Arrangement		1 Form A 1 Form B	2 Form A
Contact material	Au-flashed AgSnO <sub>2</sub>		
Initial contact resistance, max.	30 mΩ		
Rating (resistive)	Max. switching power	2,000 VA, 150 W	
	Max. switching voltage	380 V AC, 250 V DC	
	Max. switching current	8 A	
	Min. switching capacity <sup>#1</sup>	100 mA, 5 V DC	
Expected life (min. operations)	Mechanical (at 180 cpm)	10 <sup>7</sup>	
	Electrical	8 A 250 V AC (resistive)	10 <sup>5</sup>
		5 A 30 V DC (resistive)	2 × 10 <sup>5</sup>
		5 A 250 V AC cosφ = 0.4	—

#### Coil (polarized) (at 25°C 77°F)

Single side stable	Nominal operating power	Approx. 240 mW
Latching	Nominal set and reset power	Approx. 240 mW

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 Measurement at same location as "Initial breakdown voltage" section
- \*2 Detection current: 10 mA
- \*3 Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981
- \*4 Excluding contact bounce time
- \*5 Half-wave pulse of sine wave: 11ms; detection time: 10μs
- \*6 Half-wave pulse of sine wave: 6ms
- \*7 Detection time: 10μs
- \*8 Refer to 6. Conditions for operation, transport and storage mentioned in [AMBIENT ENVIRONMENT \(p. 19, Relay Technical Information\)](#).

#### Characteristics (at 25°C 77°F 50% Relative humidity)

For characteristics, please refer to the data sheet "ST RELAYS" on page 53.

### ORDERING INFORMATION




Contact arrangement	Operating function	Coil voltage	Contact material
1: 1 Form A 1 Form B 2: 2 Form A	Nil: Single side stable L2: 2 coil latching L: 1 coil latching	DC 3, 5, 6, 9, 12, 24, 48 V	F: AgSnO <sub>2</sub> type contact

(Note) Standard packing: Carton; 50 pcs., Case; 500 pcs.

### REFERENCE DATA

#### 1. Contact reliability

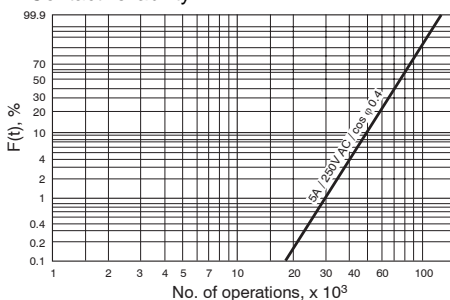

For Cautions for Use, see [Relay Technical Information](#).