FAIRCHILD SEMICONDUCTOR®

July 2007

FDD4141

P-Channel PowerTrench® MOSFET

-40V, -50A, 12.3mΩ

Features

- Max $r_{DS(on)}$ = 12.3mΩ at V_{GS} = -10V, I_D = -12.7A
- Max $r_{DS(on)}$ = 18.0mΩ at V_{GS} = -4.5V, I_D = -10.4A
- High performance trench technology for extremely low $r_{DS(on)}$
- RoHS Compliant

General Description

This P-Channel MOSFET has been produced using Fairchild Semiconductor's proprietary PowerTrench® technology to deliver low $r_{DS(on)}$ and optimized Bvdss capability to offer superior performance benefit in the applications. and optimized switching performance capability reducing power dissipation losses in converter/inverter applications.

Applications

- Inverter
- Power Supplies



D-PAK
(TO-252)



MOSFET Maximum Ratings T_C = 25°C unless otherwise noted

Symbol	Parameter			Ratings	Units
V_{DS}	Drain to Source Voltage			-40	V
V_{GS}	Gate to Source Voltage			±20	V
I_D	Drain Current -Continuous (Package limited)	T_C = 25°C		-50	A
	-Continuous (Silicon limited)	T_C = 25°C		-58	
	-Continuous	T_A = 25°C	(Note 1a)	-10.8	
	-Pulsed			-100	
E_{AS}	Single Pulse Avalanche Energy		(Note 3)	337	mJ
P_D	Power Dissipation	T_C = 25°C		69	W
	Power Dissipation	T_A = 25°C	(Note 1a)	2.4	
T_J, T_{STG}	Operating and Storage Junction Temperature Range			-55 to +150	°C

Thermal Characteristics

$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.8	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	52	

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDD4141	FDD4141	D-PAK (TO-252)	13''	12mm	2500 units

©2007 Fairchild Semiconductor Corporation

Electrical Characteristics T_J = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = -250μA, V_{GS} = 0V	-40			V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = -250μA, referenced to 25°C		-29		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = -32V, V_{GS} = 0V			-1	μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
On Characteristics						
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = -250μA	-1	-1.8	-3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = -250μA, referenced to 25°C		5.8		mV/°C
$r_{DS(on)}$	Static Drain to Source On Resistance	V_{GS} = -10V, I_D = -12.7A		10.1	12.3	mΩ
		V_{GS} = -4.5V, I_D = -10.4A		14.5	18.0	
		V_{GS} = -10V, I_D = -12.7A, T_J = 125°C		15.3	18.7	
g_{FS}	Forward Transconductance	V_{DS} = -5V, I_D = -12.7A		38		S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = -20V, V_{GS} = 0V, f = 1MHz		2085	2775	pF
C_{oss}	Output Capacitance			360	480	pF
C_{rss}	Reverse Transfer Capacitance			210	310	pF
R_g	Gate Resistance	f = 1MHz		4.6		Ω
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = -20V, I_D = -12.7A, V_{GS} = -10V, R_{GEN} = 6Ω		10	19	ns
t_r	Rise Time			7	13	ns
$t_{d(off)}$	Turn-Off Delay Time			38	60	ns
t_f	Fall Time			15	27	ns
Q_g	Total Gate Charge	V_{GS} = 0V to -10V; V_{DD} = -20V, I_D = -12.7A		36	50	nC
Q_g	Total Gate Charge	V_{GS} = 0V to -5V; V_{DD} = -20V, I_D = -12.7A		19	27	nC
Q_{gs}	Gate to Source Charge	V_{DD} = -20V, I_D = -12.7A		7		nC
Q_{gd}	Gate to Drain “Miller” Charge	V_{DD} = -20V, I_D = -12.7A		8		nC
Drain-Source Diode Characteristics						
V_{SD}	Source to Drain Diode Forward Voltage	V_{GS} = 0V, I_S = -12.7A (Note 2)		-0.8	-1.2	V
t_{rr}	Reverse Recovery Time	I_F = -12.7A, di/dt = 100A/μs		29	44	ns
Q_{rr}	Reverse Recovery Charge			26	40	nC

Notes:

1: $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.



a) 52°C/W when mounted on a 1 in^2 pad of 2 oz copper

b) 100°C/W when mounted on a minimum pad.

2: Pulse Test: Pulse Width < 300μs, Duty cycle < 2.0%.

3: Starting T_J = 25°C, L = 3mH, I_{AS} = 15A, V_{DD} = 40V, V_{GS} = 10V.

©2007 Fairchild Semiconductor Corporation

Typical Characteristics T_J = 25°C unless otherwise noted

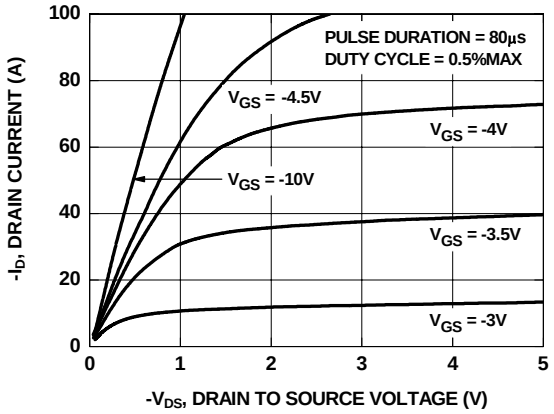

Figure 1. On-Region Characteristics

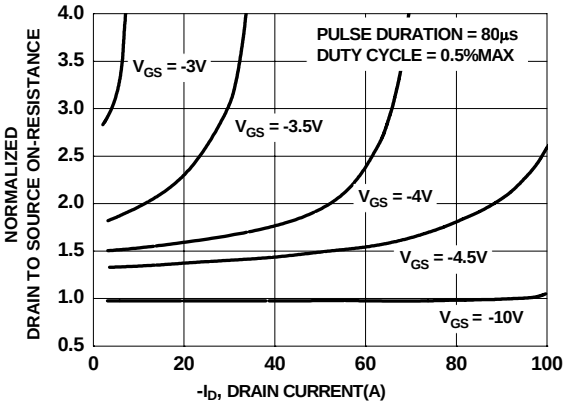

Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

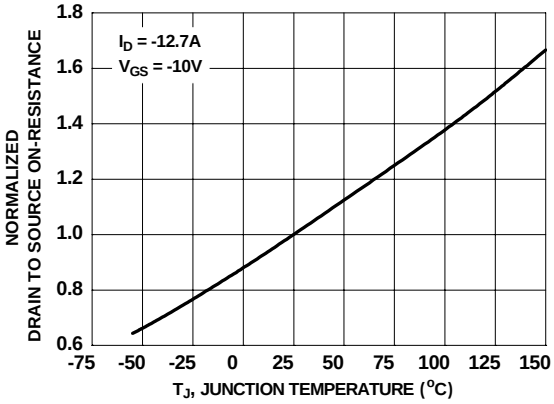

Figure 3. Normalized On-Resistance vs Junction Temperature

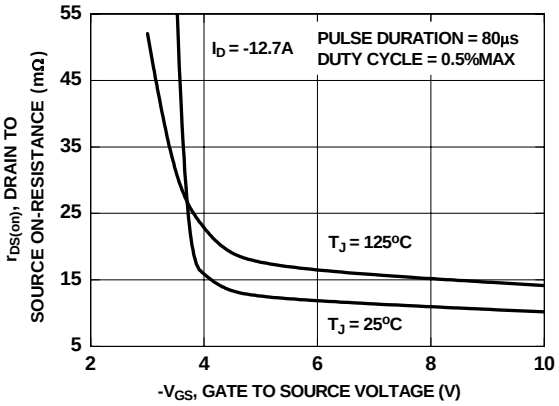

Figure 4. On-Resistance vs Gate to Source Voltage

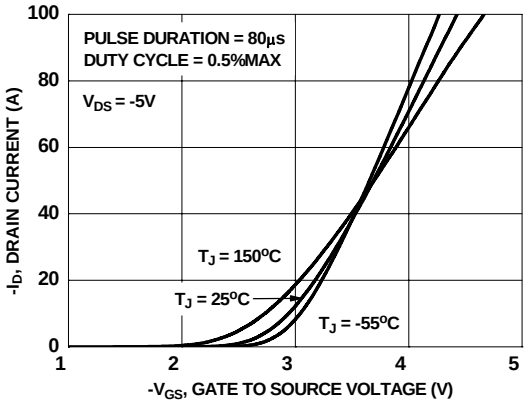

Figure 5. Transfer Characteristics

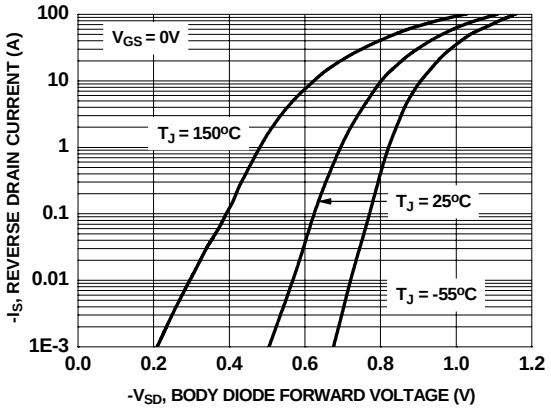

Figure 6. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics T_J = 25°C unless otherwise noted

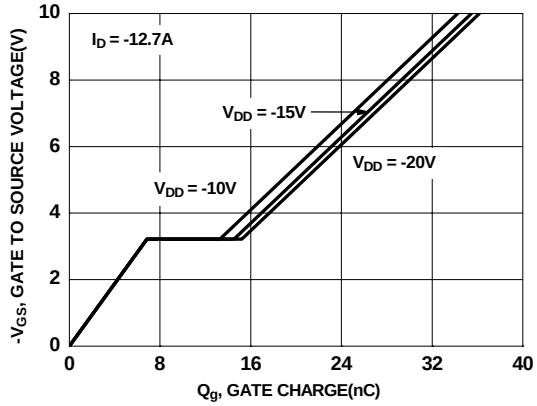

Figure 7. Gate Charge Characteristics

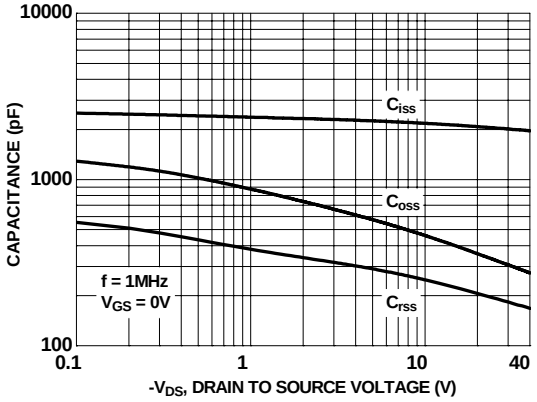

Figure 8. Capacitance vs Drain to Source Voltage

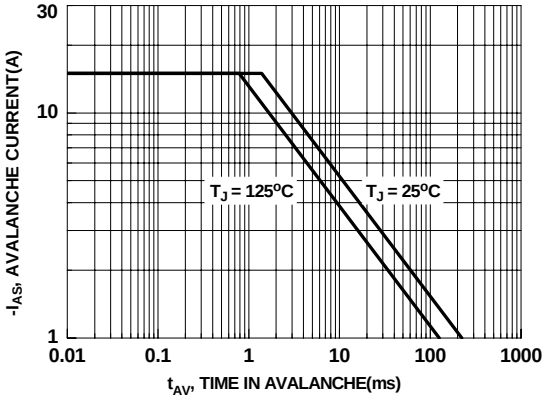

Figure 9. Unclamped Inductive Switching Capability

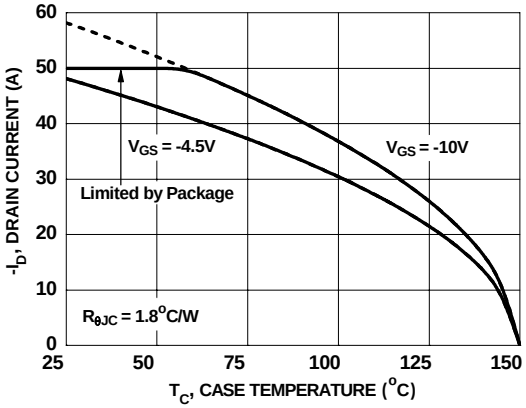

Figure 10. Maximum Continuous Drain Current vs Case Temperature

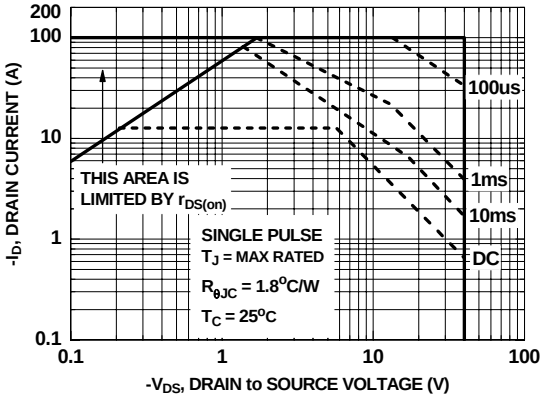

Figure 11. Forward Bias Safe Operating Area

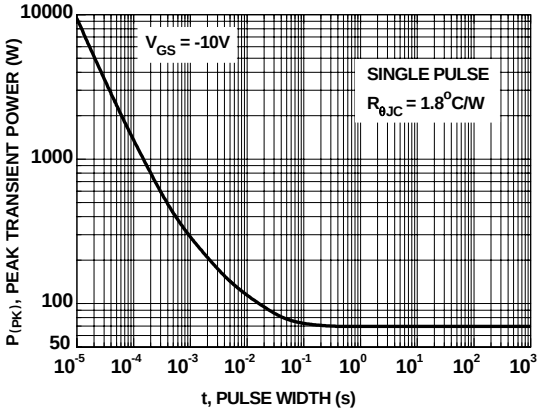

Figure 12. Single Pulse Maximum Power Dissipation

Typical Characteristics T_J = 25°C unless otherwise noted

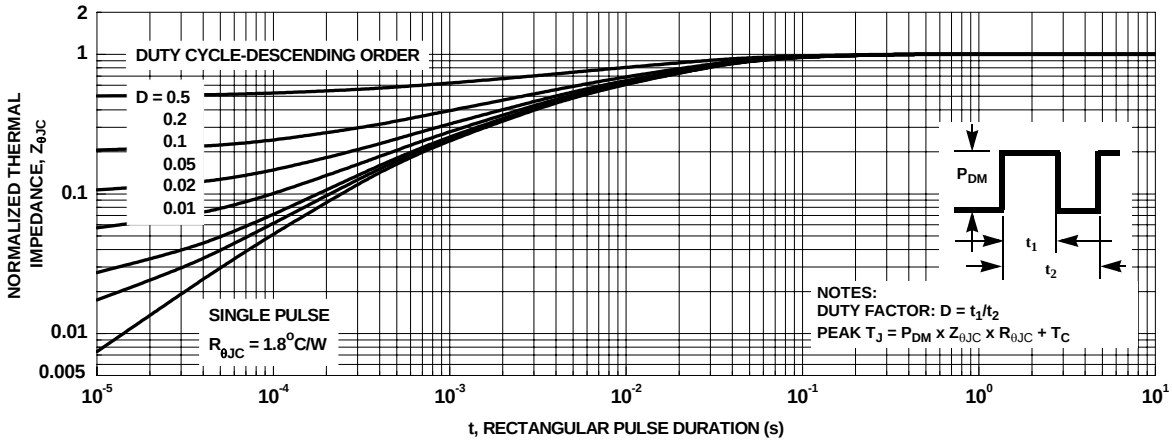

Figure 13. Transient Thermal Response Curve

FAIRCHILD
SEMICONDUCTOR®

TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx®	Green FPS™ e-Series™	POWEREDGE®	SuperSOT™-8
Build it Now™	GOT™	Power-SPM™	SyncFET™
CorePLUS™	*i-Lo*™	PowerTrench®	The Power Franchise®
CROSSVOLT™	IntelliMAX™	Programmable Active Droop™	™
CTL™	ISOPLANAR™	QFET®	TinyBoost™
Current Transfer Logic™	MegaBuck™	QS™	TinyBuck™
EcoSPARK®	MICROCOUPLER™	QT Optoelectronics™	TinyLogic®
FACT Quiet Series™	MicroFEET™	Quiet Series™	TINYOPTO™
FACT®	MicroPak™	RapidConfigure™	TinyPower™
FAST®	Motion-SPM™	SMART START™	TinyPWM™
FastvCore™	OPTOLOGIC®	SPM®	TinyWire™
FPS™	OPTOPLANAR®	STEALTH™	µSerDes™
FRFET®	PDP-SPM™	SuperFET™	UHC®
Global Power Resourse℠	Power220®	SuperSOT™-3	UniFET™
Green FPS™	Power247®	SuperSOT™-6	VCX™

DISCLAIMER
FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.

2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor.The datasheet is printed for reference information only.

Rev. I29