


Standard Recovery Diodes (Stud Version), 400 A

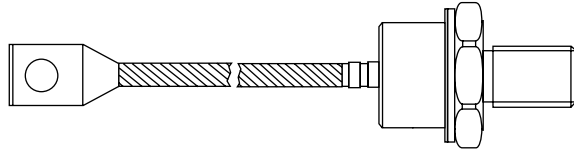

DO-205AB (DO-9)

FEATURES

- Wide current range
- High surge current capabilities
- Stud cathode and stud anode version
- Standard JEDEC types
- RoHS compliant
- Designed and qualified for industrial level


RoHS
COMPLIANT

PRODUCT SUMMARY

| | |
|-------------|-------|
| $I_{F(AV)}$ | 400 A |
|-------------|-------|

TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- High power drives

MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER | TEST CONDITIONS | VALUES | UNITS |
|--------------|-----------------|-------------|-------------------|
| $I_{F(AV)}$ | | 400 | A |
| | T_C | 120 | °C |
| $I_{F(RMS)}$ | | 630 | A |
| I_{FSM} | 50 Hz | 8250 | A |
| | 60 Hz | 8640 | |
| I^2t | 50 Hz | 340 | kA ² s |
| | 60 Hz | 311 | |
| V_{RRM} | Range | 800 to 1600 | V |
| T_J | | - 40 to 200 | °C |

ELECTRICAL SPECIFICATIONS
VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V | V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V | I_{RRM} MAXIMUM AT $T_J = T_J$ MAXIMUM mA |
|-------------|--------------|--|--|--|
| 400U(R) | 80 | 800 | 900 | 15 |
| | 120 | 1200 | 1300 | |
| | 160 | 1600 | 1700 | |

| FORWARD CONDUCTION | | | | | |
|---|---------------|---|----------------------------|--------|--------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum average forward current at case temperature | $I_{F(AV)}$ | 180° conduction, half sine wave | | 400 | A |
| | | | | 120 | °C |
| Maximum RMS forward current | $I_{F(RMS)}$ | DC at 110 °C case temperature | | 630 | A |
| Maximum peak, one cycle forward, non-repetitive surge current | I_{FSM} | t = 10 ms | No voltage reappplied | 8250 | A |
| | | t = 8.3 ms | | 8640 | |
| | | t = 10 ms | 100 % V_{RRM} reappplied | 6940 | |
| | | t = 8.3 ms | | 7270 | |
| Maximum I^2t for fusing | I^2t | t = 10 ms | No voltage reappplied | 340 | kA ² s |
| | | t = 8.3 ms | | 311 | |
| | | t = 10 ms | 100 % V_{RRM} reappplied | 241 | |
| | | t = 8.3 ms | | 220 | |
| Maximum $I^2\sqrt{t}$ for fusing | $I^2\sqrt{t}$ | t = 0.1 to 10 ms, no voltage reappplied | | 3400 | kA ² √s |
| Low level value of threshold voltage | $V_{F(TO)1}$ | (16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$), $T_J = T_J$ maximum | | 0.77 | V |
| High level value of threshold voltage | $V_{F(TO)2}$ | (I > $\pi \times I_{F(AV)}$), $T_J = T_J$ maximum | | 0.85 | |
| Low level value of forward slope resistance | r_{f1} | (16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$), $T_J = T_J$ maximum | | 0.49 | mΩ |
| High level value of forward slope resistance | r_{f2} | (I > $\pi \times I_{F(AV)}$), $T_J = T_J$ maximum | | 0.49 | |
| Maximum forward voltage drop | V_{FM} | $I_{pk} = 1500$ A, $T_J = T_J$ maximum, $t_p = 10$ ms sinusoidal wave | | 1.62 | V |

| THERMAL AND MECHANICAL SPECIFICATIONS | | | | | |
|--|----------------|---|--|-----------------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum junction operating and storage temperature range | T_J, T_{Stg} | | | - 40 to 200 | °C |
| Maximum thermal resistance, junction to case | R_{thJC} | DC operation | | 0.15 | K/W |
| Maximum thermal resistance, case to heatsink | R_{thCS} | Mounting surface, smooth, flat and greased | | 0.04 | |
| Maximum allowed mounting torque ± 10 % | | Not lubricated threads | | 27 | N · m |
| Approximate weight | | | | 250 | g |
| Case style | | See dimensions - link at the end of datasheet | | DO-205AB (DO-9) | |

| ΔR_{thJC} CONDUCTION | | | | |
|------------------------------|-----------------------|------------------------|---------------------|-------|
| CONDUCTION ANGLE | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | TEST CONDITIONS | UNITS |
| 180° | 0.020 | 0.013 | $T_J = T_J$ maximum | K/W |
| 120° | 0.023 | 0.023 | | |
| 90° | 0.029 | 0.031 | | |
| 60° | 0.042 | 0.044 | | |
| 30° | 0.073 | 0.074 | | |

Note

- The table above shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

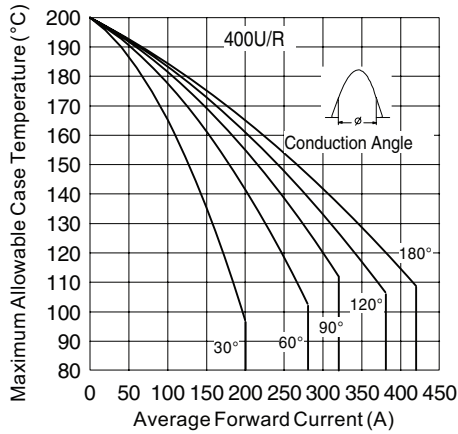


Fig. 1 - Current Ratings Characteristics

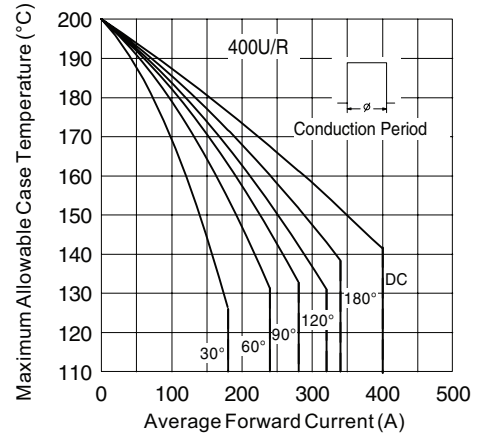


Fig. 2 - Current Ratings Characteristics

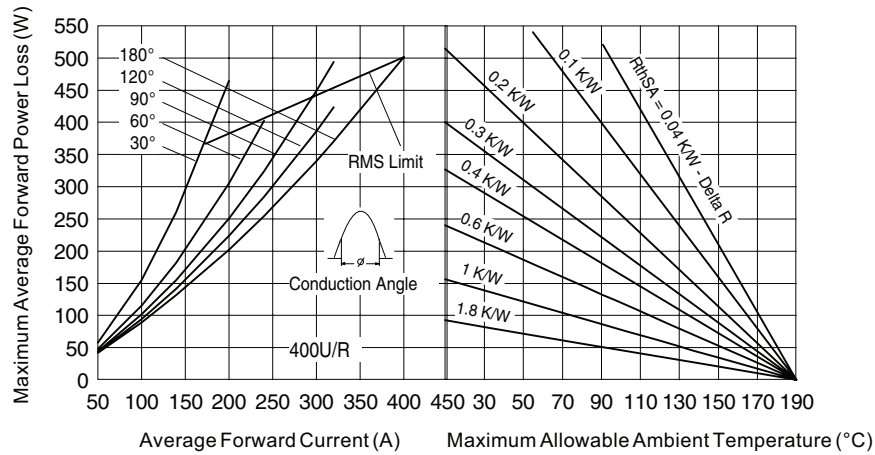


Fig. 3 - Forward Power Loss Characteristics

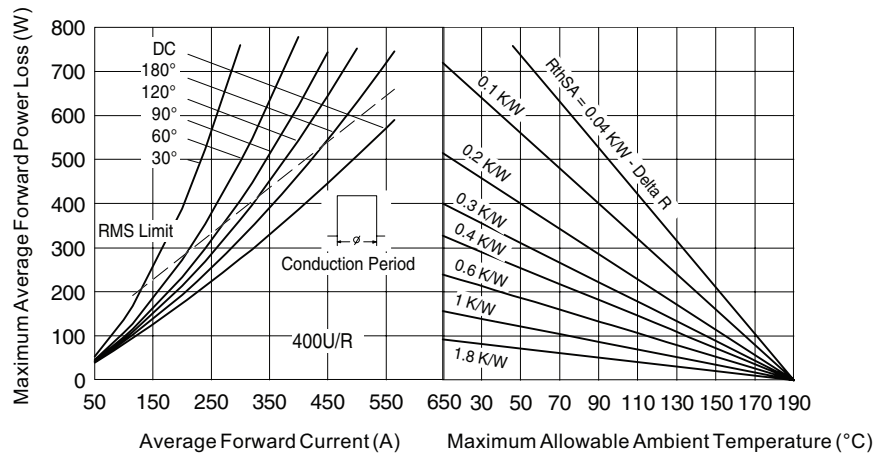


Fig. 4 - Forward Power Loss Characteristics

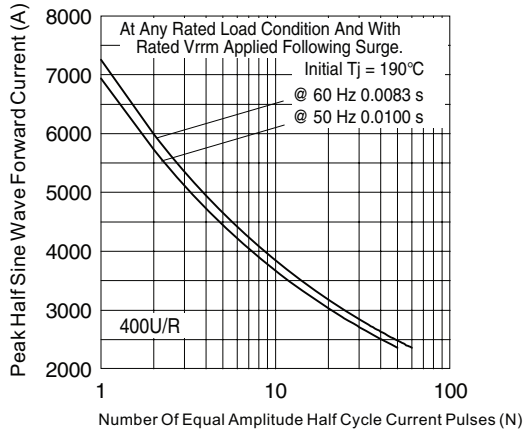


Fig. 5 - Maximum Non-Repetitive Surge Current

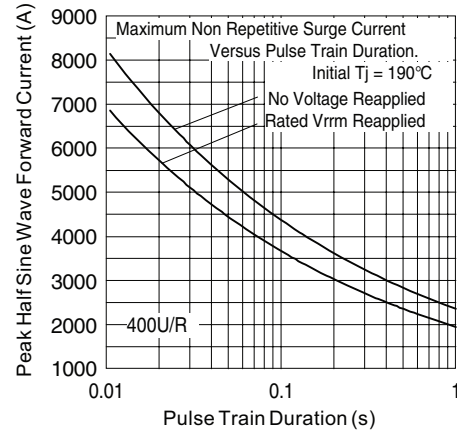


Fig. 6 - Maximum Non-Repetitive Surge Current

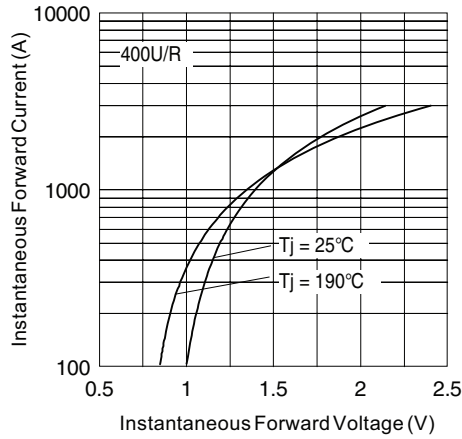


Fig. 7 - Forward Voltage Drop Characteristics


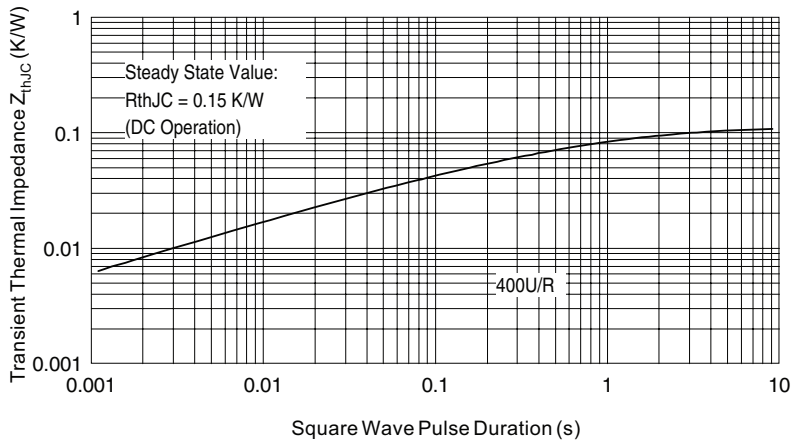


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic



ORDERING INFORMATION TABLE

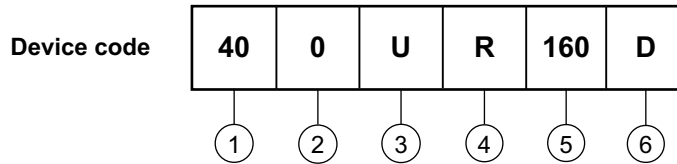

- 1** - 40 = Essential part number
- 2** - 0 = Standard recovery device
- 3** - U = Stud normal polarity (cathode to stud)
- 4** -
 - None = Stud normal polarity (cathode to stud)
 - R = Stud reverse polarity (anode to stud)
- 5** - Voltage code x 10 = V_{RRM} (see Voltage Ratings table)
- 6** - Diffused diode

Note: For metric device M16 x 1.5 contact factory

| LINKS TO RELATED DOCUMENTS | |
|----------------------------|---|
| Dimensions | http://www.vishay.com/doc?95339 |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.