

9097247 TOSHIBA, ELECTRONIC

02E 17492 D

TA7666P
TA7667P

T-52-13-07

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, $V_{CC}=9V$, $f=1kHz$, $T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current	I_{CCQ}		$V_{IN}=0$	-	4	6	mA
Output Current	I_O		$V_{CE}=2V$	15	20	30	mA
Output Leak Current	$I_{O(OFF)}$		$V_{IN}=0$	-	-	50	μA
Voltage Gain	G_v		-	-	12.6	-	dB

TA7666P

Comparator Turn-On Thresholds	LD5		$G_v=12.6dB$	-1	0	1	dB
				189	212	238	mV _{rms}
	LD4			-4	-3	-2	dB
				134	150	168	mV _{rms}
	LD3			-7.5	-6	-4.5	dB
				89	106	126	mV _{rms}
	LD2			-13	-11	-9	dB
				47	60	75	mV _{rms}
1st Threshold Difference between R and L Channel	LD1			-19	-16	-13	dB
				24	34	47	mV _{rms}
1st Threshold Difference between R and L Channel	$\Delta LD1$			-1	0	1	dB

TA7667P

Comparator Turn-On Thresholds	LD5		$G_v=12.6dB$	-1	0	1	dB
				189	212	238	mV _{rms}
	LD4			-3	-2	-1	dB
				150	168	189	mV _{rms}
	LD3			-5	-4	-3	dB
				119	134	150	mV _{rms}
	LD2			-7	-6	-5	dB
				95	106	119	mV _{rms}
1st Threshold Difference between R and L Channel	LD1			-9	-8	-7	dB
				75	84	95	mV _{rms}
1st Threshold Difference between R and L Channel	$\Delta LD1$			-1	0	1	dB

AUDIO LINEAR IC


9097247 TOSHIBA, ELECTRONIC

02E 17493 D

TA7666P
TA7667P

T-52-13-07

TEST CIRCUIT/BLOCK DIAGRAM

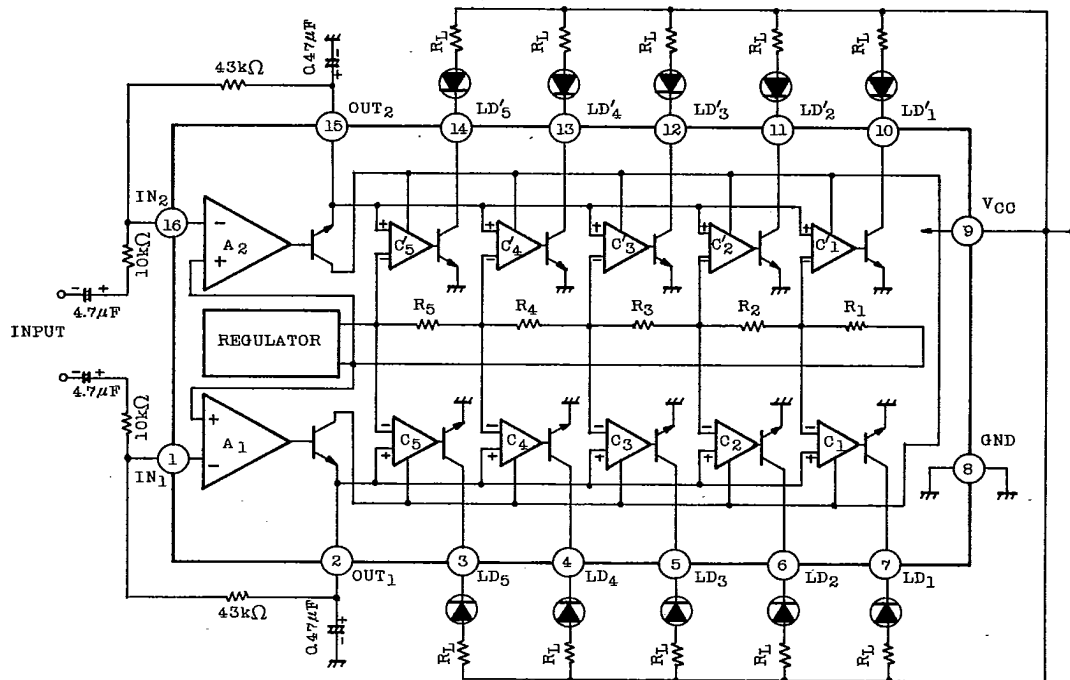

INTERNAL RESISTANCE VALUE


	TA7666P	TA7667P	UNIT
R ₁	1.36	3.66	kΩ
R ₂	1.08	0.948	kΩ
R ₃	1.89	1.19	kΩ
R ₄	1.78	1.50	kΩ
R ₅	2.50	1.89	kΩ

TOSHIBA

TA7666P
TA7667P

T-52-13-07

(1) SETUP OF TURNING-ON LEVEL

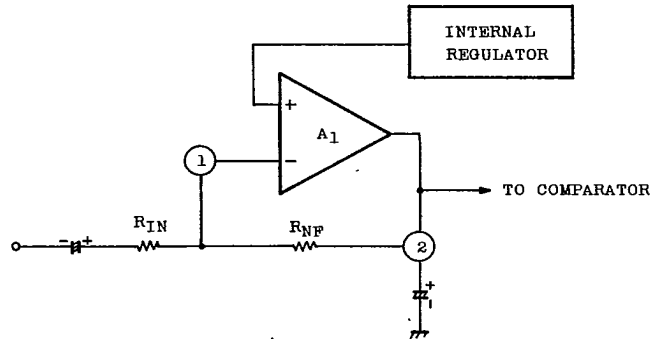

As voltage gain of inverting amplifier depends on signal source resistance R_g , output resistance of prestage amplifier should be smaller than $10 \times R_{IN}$.

(Output resistance $\leq 10 R_{IN}$)

It is better to change R_{NF} for voltage gain adjustment, As 5th LED turn-on input level is 911.6 mV_{rms} at $G_v=0\text{dB}$, voltage gain of inverting amplifier is set by the following equation.

$$\text{Voltage Gain} = 20 \log \frac{911.6 \text{ (mV}_{rms})}{V_{IN}(\text{Input Voltage})} \text{ (dB)}$$

(Example) Case of 5th LED turn-on at 300mV_{rms} input level

$$\text{Voltage Gain} = \frac{911.6}{300} \div 3 \text{ (9.6dB)}$$

When R_{IN} is set up to be $10\text{k}\Omega$, R_{NF} becomes $30\text{k}\Omega$.

$$R_{NF} = 3 \times R_{IN} = 30\text{k}\Omega$$

Then each LED turn-on level is as follows.

IC	1st LED	2nd LED	3rd LED	4th LED	5th LED
TA7666P	48 -16dB	86 -11dB	152 -6dB	215 -3dB	304mV_{rms} 0dB
TA7667P	121 -8dB	152 -6dB	192 -4dB	241 -2dB	304mV_{rms} 0dB

AUDIO LINEAR IC


9097247 TOSHIBA, ELECTRONIC

02E 17495 D

TA7666P
TA7667P

T-52-13-07

(2) 5 LED×2 APPLICATION CIRCUIT (TA7666P)

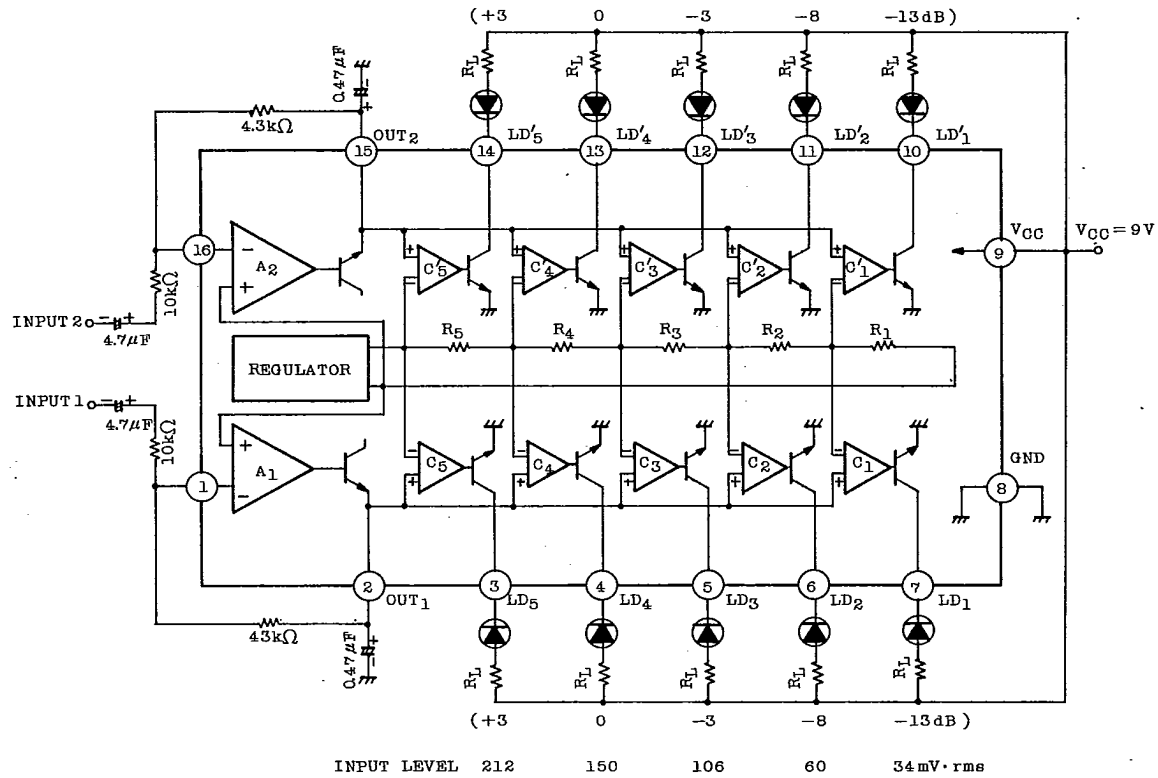

TOSHIBA

