

COLOUR DEMODULATOR COMBINATION

The TDA2520 is an integrated synchronous demodulator combination for colour television receivers incorporating the following functions :

- 8,8 MHz oscillator followed by a divider giving two 4,4 MHz signals used as reference signals
- keyed burst phase detector for optimum noise behaviour
- a stage to obtain chrominance signal control (a.c.c.) and an a.c.c. reference level
- a colour killer and identification signal detector
- two synchronous demodulators for the (B-Y) and (R-Y) signals
- temperature compensated emitter follower outputs
- PAL switch
- PAL flip-flop
- integrated capacitors in the symmetrical demodulators reduce unwanted carrier-signals at the outputs.


QUICK REFERENCE DATA				
Supply voltage	V_{12-16}	typ.	12	V
Supply current	I_{12}	typ.	40	mA
Colour difference output signals				
peak-to-peak values				
	-(R-Y)	$V_{3-16(p-p)}$	>	2,4 V
	-(G-Y)	$V_{2-16(p-p)}$	>	1,35 V
	-(B-Y)	$V_{1-16(p-p)}$	>	3 V
Impedance of colour difference				
signal outputs				
		typ.	250	Ω

PACKAGE OUTLINES

TDA2520 : 16-lead DIL ; plastic (SOT-38).
TDA2520Q : 16-lead QIL ; plastic (SOT-58).

TDA2520 TDA2520Q

BLOCK DIAGRAM

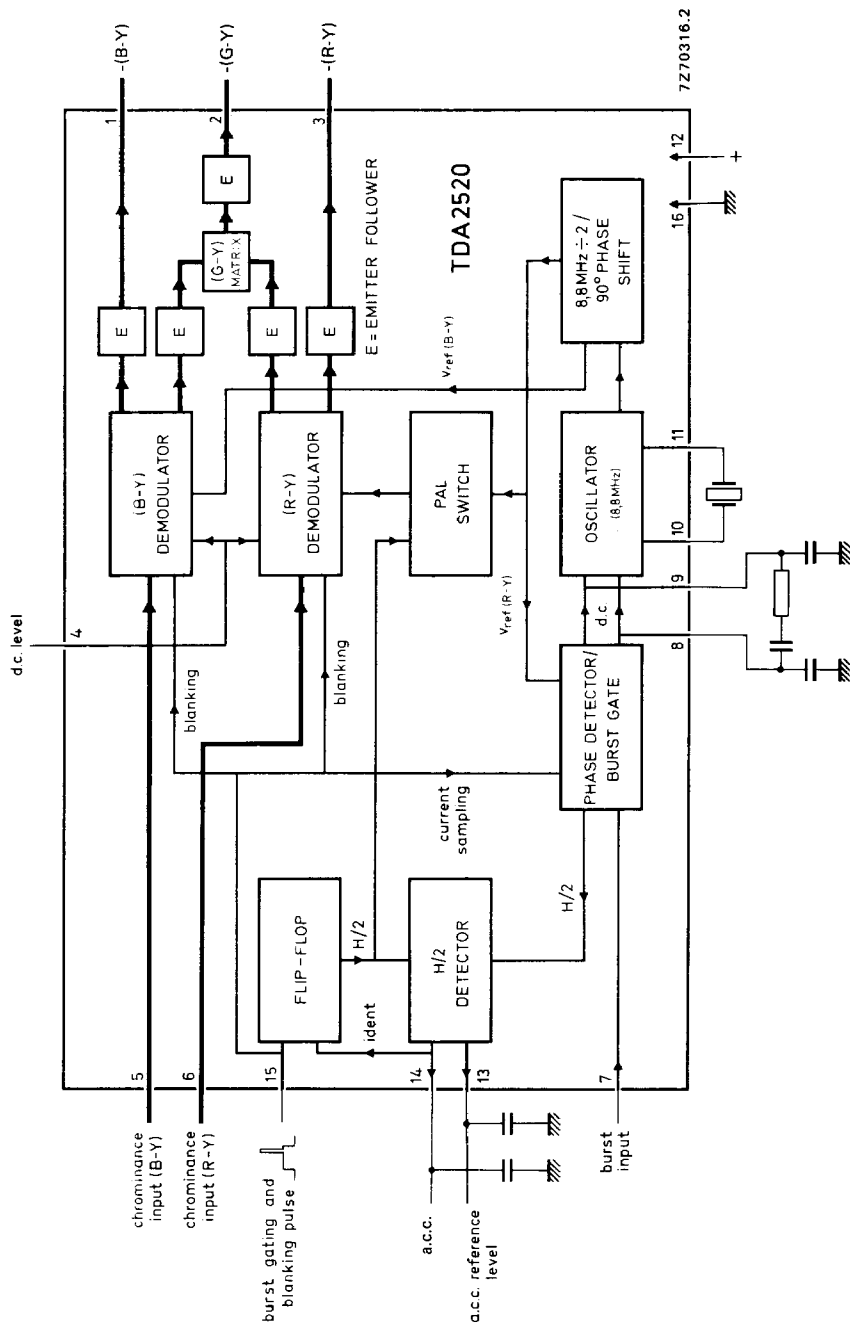

7270316.2

RATINGS Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltage

Supply voltage	V_{12-16}	max.	14	V
----------------	-------------	------	----	---

Power dissipation

Total power dissipation	P_{tot}	max.	600	mW
-------------------------	-----------	------	-----	----

Temperatures

Storage temperature	T_{stg}	-20 to +125	°C
---------------------	-----------	-------------	----

Operating ambient temperature	T_{amb}	-20 to +60	°C
-------------------------------	-----------	------------	----

CHARACTERISTICS at $V_{12-16} = 12$ V; $T_{amb} = 25$ °C

Demodulator part

Ratio of demodulated signals

B - Y/R - Y:	$\frac{V_{1-16}}{V_{3-16}}$	typ.	1,78	
G - Y/R - Y:	$\frac{V_{2-16}}{V_{3-16}}$	typ.	0,85	1)
G - Y/R - Y:	$\frac{V_{2-16}}{V_{3-16}}$	typ.	0,17	2)

Colour difference output signals ³⁾

peak-to-peak values

-(R - Y)	$V_{3-16(p-p)}$	>	2,4	V
-(G - Y)	$V_{2-16(p-p)}$	>	1,35	V
-(B - Y)	$V_{1-16(p-p)}$	>	3	V

Impedance of colour difference

signal outputs

$ Z_{3-16} $	typ.	250	Ω
$ Z_{2-16} $	typ.	250	Ω
$ Z_{1-16} $	typ.	250	Ω

H/2 ripple at R - Y output (peak-to-peak value)

<	10	mV
---	----	----

Blanking and keying pulse

burst keying: active for
inactive for

V_{15-16}	>	7,5	V
V_{15-16}	<	6,5	V

blanking: active for
inactive for

V_{15-16}	>	2	V
V_{15-16}	<	1	V

1) The demodulators are driven by a chrominance signal of equal amplitude for the (R - Y) and the (B - Y) components. The phase of the (R - Y) chrominance signal equals the phase of the (R - Y) reference signal.

The same holds for the (B - Y) signals.

2) As under note 1, but the phase of the (R - Y) reference signal reversed.

3) The d. c. level of the colour difference outputs can be adjusted from 6 to 10 V at pin 4.

CHARACTERISTICS (continued)

Reference part

Colour burst (peak-to-peak value)	$V_{7-16(p-p)}$	typ.	0,5 V
Phase difference between reference and burst signals for ± 400 Hz deviation of crystal frequency		<	$\pm 5^\circ$
Overall holding range with typical crystal	Δf	typ.	± 500 Hz
A.C.C. reference output voltage	V_{13-16}	typ.	7 V
A.C.C. voltage at 0,5 V peak-to-peak burst at correct phase with zero burst	V_{14-16} V_{14-16}	typ. typ.	5,5 V 7,0 V
Oscillator input resistance	R_{11-16}	typ.	270 Ω
Oscillator input capacitance	C_{11-16}	see note	
Oscillator output resistance	R_{10-16}	typ.	200 Ω

Note : to be established.