
# **Batteries**


# **DATA SHEET**


Description	: Flat Lithium Battery
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 140mAh
Dimensions	: ø16.0 x 3.2mm
Average Weight	: 1.9 g
Application	: Remote keyless entry, computer memory back up
Operating temperature	:-10°C to +60°C

### **Discharge Characteristics on Load**



**Dimension Drawing** 






Model No.: CR1632


Unit: mm

#### **Discharge Characteristics on Temperature**





# **Discharge Characteristics on Pulse Load**

(Discharge depth 40%)

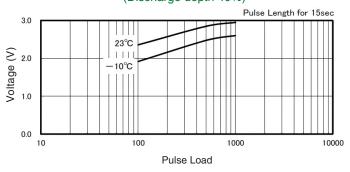

## Discharge Load vs. Discharge Capacity 2.0V Cut off





The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

#### www.gpbatteries.com