

**NITECORE®**

# **P10i** *i-GENERATION*

**21700 ULTRA COMPACT TACTICAL FLASHLIGHT**

**STROBE READY™**

**1800 Lumens**

**USB-C Rechargeable**



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.


**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



# ***i-GENERATION*** **ULTIMATE REVOLUTION**

## **Output**

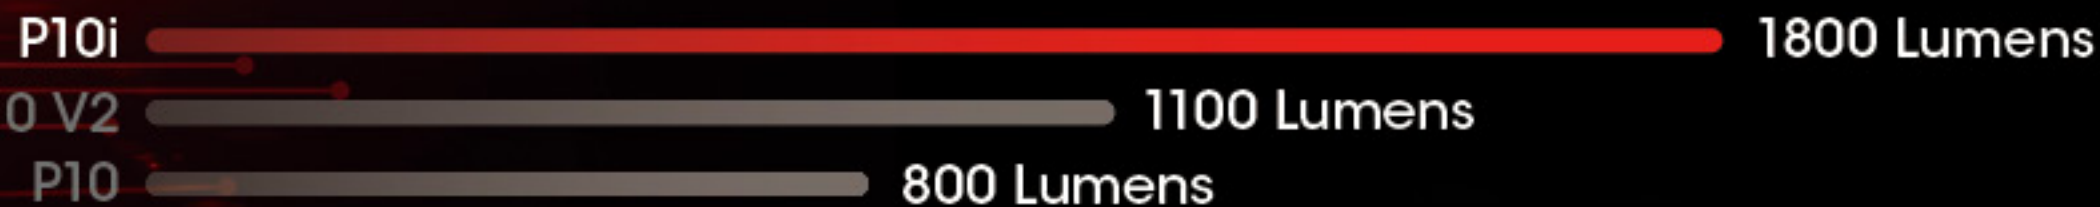

## **Throw**



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

# FUSION OF TACTICS AND TECHNOLOGY

- Utilizes a Luminus SST-40-W LED with a max output of 1,800 lumens
- Powered by the optimized 21700 i Series Battery
- 2nd Generation STROBE READY™ Technology
- Compatible with i Series modular extensions

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

**18000**

**LUMENS MAX OUTPUT**

**290 METERS MAX THROW**

**TACTICAL BLAZING PERFORMANCE**

Utilizing a Luminus SST-40-W LED and an optical system combined with crystal coating and "Precision Digital Optics Technology" (PDOT), the P10i has a max output of 1,800 lumens, a max throw of 290 meters and a peak beam intensity of 21,100cd, ideal for law enforcement, assault operations, self defense, search and patrols.

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



**2<sup>nd</sup> GENERATION** (Patent No.: ZL201320545349.4)

**STROBE READY™ TECHNOLOGY**

**SPECIALLY DESIGNED FOR TACTICAL APPLICATIONS**

- Enables a STROBE access in any state
- Inset pedal design to avoid accidental activation

(US Patent No.: 15/846299 US10237955B1)

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

# ULTIMATE DUAL TAIL SWITCH DESIGN



## TACTICAL TAIL SWITCH

For Momentary-on and Constant-on Illumination



Tactical Momentary-on



Constant-on



## STROBE READY™ MODE BUTTON

For Output Adjustment and Instantly Accessing STROBE



HIGH

1,800 Lumens



MID

280 Lumens



LOW

35 Lumens



STROBE



Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

## **USB-C RECHARGEABLE**

### **CHARGING PORT COVER**

Provides excellent water, dust and impact resistance

### **USB-C CHARGING PORT**

Available with a reversible plug-in



**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



REVOLUTIONARY AND POWERFULLY UPGRADED

# 21700i (Patent No. ZL201820118916.0, US Patent Pending) SERIES BATTERY

- The 21700 i Series Battery is a patent product developed by NITECORE.
- Enables a highly efficient output by minimizing the loss of power due to internal resistance.
- Features dual way output with positive and negative polarities at both ends and a high energy density.
- Compatible with modular extensions of intelligent communications and controlling systems.

\* The NL2140i rechargeable Li-ion battery (4,000mAh) is included.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.



**NITECORE®**

**P10i** *i-GENERATION*  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

# ***ULTRA COMPACT AND LIGHTWEIGHT***

## ***WITH A STANDARD TUBE DIAMETER OF 1" (25.4MM)***

The spatial distribution is precisely calculated so that the electronic components can be packed in an ultra compact housing while upgrading its performance. The anti-slip knurling on the tube guarantees a firm grip within your palm and offers an unprecedented user experience.

Length: 147mm (5.79")    Head Diameter: 25.4mm (1")    Tube Diameter: 25.4mm (1")  
Tail Diameter: 28.5mm (1.12")    Weight: 84g (2.96oz)



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i** *i-GENERATION*  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

**50 HOURS EXTENDED RUNTIME  
ON LOW LEVEL (35 LUMENS)**

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (5,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.


These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.



**ATR** (Patent No. ZL201510534543.6)

***(ADVANCED TEMPERATURE REGULATION)***

The integrated ATR technology regulates the output of the P10i according to the working condition and ambient environment to maintain the optimal performance.

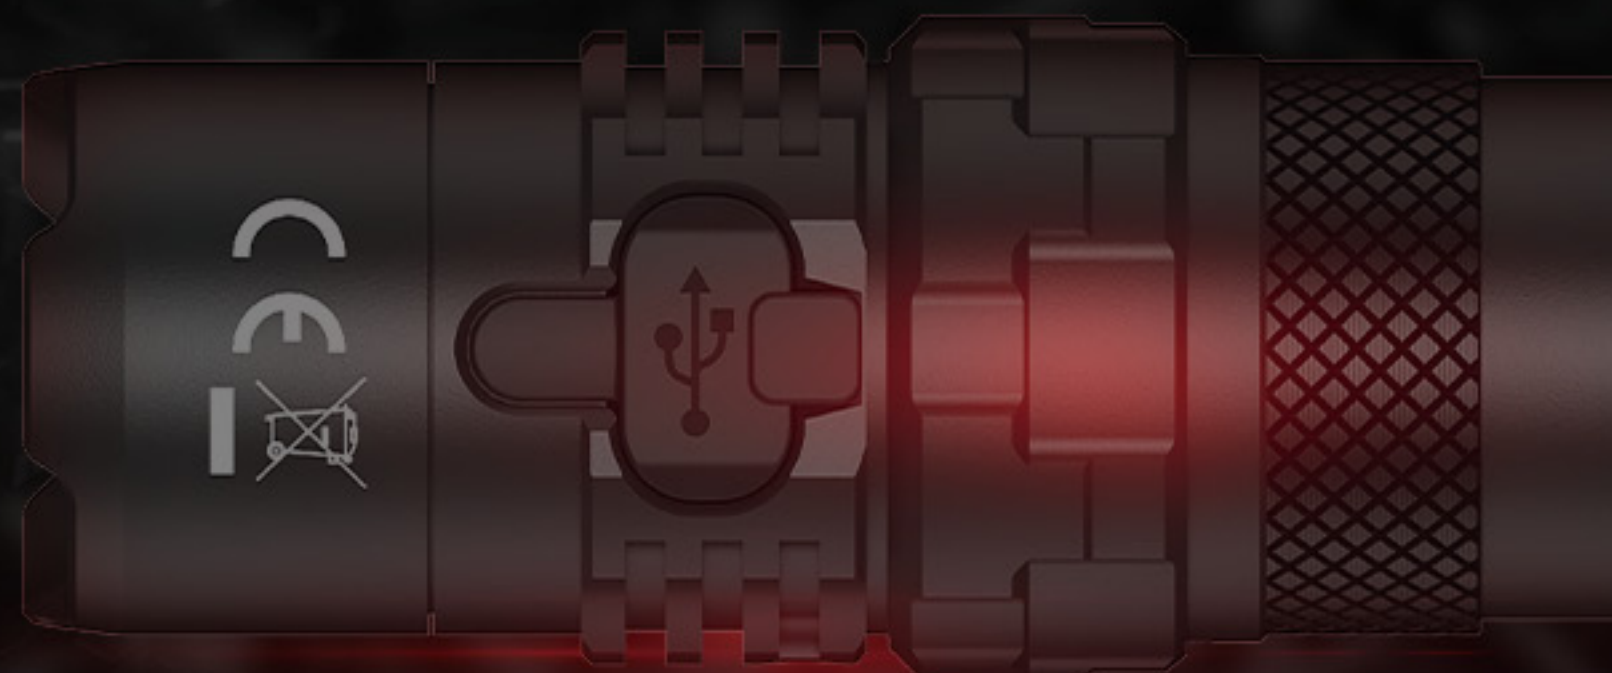

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

# FULL PACKAGE OF TACTICAL ACCESSORIES

## INCLUDED




NL2140i Battery  
4,000mAh



CR123 Battery  
Magazine



Tactical Holster  
NTH10



USB-C Charging  
Cable



Lanyard



Clip



Spare O-ring



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

# CUSTOMIZABLE TACTICAL ACCESSORIES

OPTIONAL

**P10i** i-GENERATION

21700 ULTRA COMPACT TACTICAL FLASHLIGHT



NITECORE Gun / Helmet Mounts

GM02MH



GM03



GM04



LMA1



Tactical Ring Pro

NTR10



Diffuser

NDF25



Traffic Wand

NTW25



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**



**P10i** *i-GENERATION*  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



## ***NTH10 TACTICAL HOLSTER INCLUDED***

Specially designed for law enforcement, the compact NTH10 Tactical Holster enables a quick draw of the flashlight with an adjustable stopper on the clip to suit belts of various sizes and compatible with the MOLLE System.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



Optional Accessories

# **HRM2 HELMET MOUNT**

Specially designed to mount a tactical flashlight on riot helmets, it is constructed from engineering plastic featuring solidness, lightweight and wearproof. It can be easily mounted and conveniently adjust the beam angle with a 3D pivoting system.


These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i** *i-GENERATION*  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



- Momentary On
- Output Adjustment

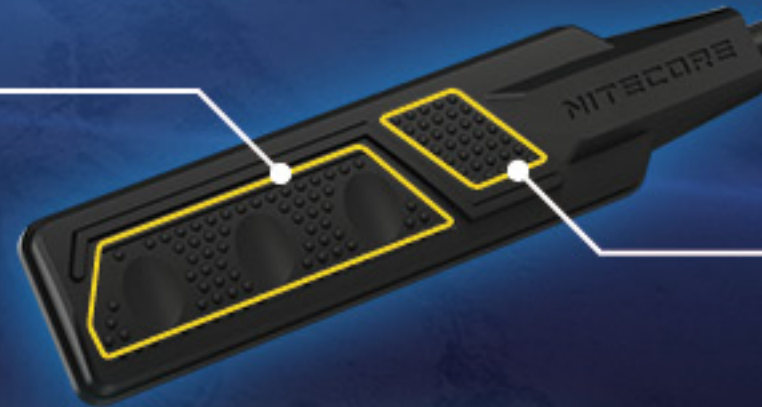

- Constant On/Off
- STROBE

Optional Accessories

# **RSW2i** USB-C REMOTE SWITCH

Specially designed for i-Generation Flashlights, it has a USB-C port for charging or connecting the cable part of the remote switch.



**NITECORE®**


**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



Optional Accessories

# F21i

## FAST CHARGING POWER SYSTEM

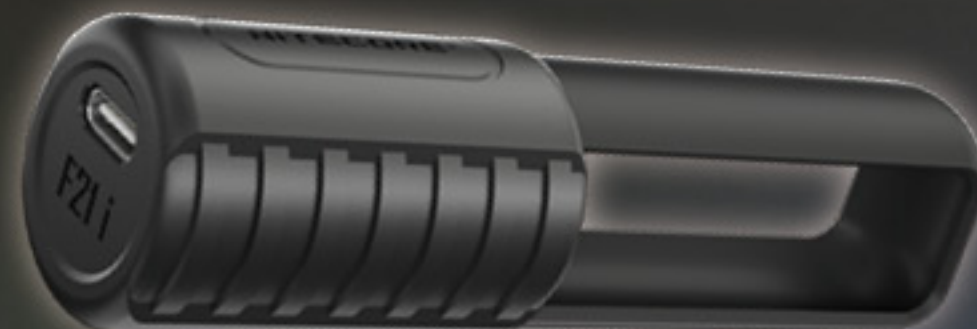

Combined with a 21700 i Series Battery, it can be used as a battery charger or a power bank with a max power of 18W and protocols of QC 3.0 and PD. It is constructed from lightweight and fire retardant PC materials.

### Technical Data

Input: USB-C: 5V=2A / 9V=2A

Output: USB-C: 5V=3A / 9V=2A / 12V=1.5A

**NITECORE®**

**P10i i-GENERATION**  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

# SPECIALLY DESIGNED NEW SLOTS

## COMPATIBLE WITH NTR10 TACTICAL RING PRO



- Keeps a two-handed grip of the firearm while carrying or operating a flashlight
- Easy for continuous and stable shooting and reloading

## COMPATIBLE WITH POCKET CLIP



- Clipped in the pocket, the backpack or the MOLLE System
- Available for attaching the lanyard

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

**NITECORE®**

**P10i** *i-GENERATION*  
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

**ALL-WEATHER APPLICABLE**

**IP68 RATED** *2m Submersible and Waterproof*  
*1m Impact Resistant*



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the Intellectual property of Nitecore. All rights to take legal action are reserved.



**TECHNICAL DATA**

Using a 4,000mAh 21700 Li-ion Battery:

FLI STANDARD	HIGH	MID	LOW	STROBE
	1,800 Lumens	280 Lumens	35 Lumens	1,800 Lumens
	1h 30min	7h 15min	38h	—
	290m	110m	44m	—
	21,100cd	3,070cd	485cd	—
	1 m (Impact Resistance)			
	IP68, 2m (Waterproof and Submersible)			

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

Using 2 x CR123 Batteries:

FLI STANDARD	HIGH	MID	LOW	STROBE
	1,100 Lumens	280 Lumens	35 Lumens	1,100 Lumens
	1h 15min	4h	20h	—
	220m	110m	44m	—
	12,200cd	3,070cd	485cd	—
	1 m (Impact Resistance)			
	IP68, 2m (Waterproof and Submersible)			

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 2 x CR123 lithium batteries (1,700mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

## FEATURES

- Utilizes a Luminus SST-40-W LED with a max output of 1,800 lumens
- An optical system combined with crystal coating and "Precision Digital Optics Technology" (PDOT)
- Max peak beam intensity of 21,100cd and max throw of 290 meters
- Highly efficient constant current circuit provides a stable output for up to 50 hours
- Dual tail switches enable intuitive operations for tactical applications
- 3 brightness levels and 1 special mode available
- STROBE READY™ Technology to enable a quick access to STROBE Mode (Patent No.: ZL201320545349.4)
- STROBE Mode uses randomly changing frequencies for stronger dizzying effects
- Intelligent Li-ion battery charging circuit with a USB-C port
- NITECORE 21700 Li-ion battery included (NL2140i 4,000mAh)
- A power indicator beside the charging port indicates the remaining battery power (Patent No. ZL201220057767.4)
- The power indicator can display the battery voltage ( $\pm 0.1V$ )
- Incorporated Advanced Temperature Regulation (ATR) module (Patent No. ZL201510534543.6)
- Optical lenses with double-sided scratch resistant coating
- Constructed from aero grade aluminum alloy
- HA III military grade hard-anodized finish
- Waterproof and dustproof rating in accordance with IP68 (2 meters submersible)
- Impact resistant to 1 meter