W20_C.qxd 28/4/03 10:19 am Page 1

Vitreous Enamelled Wirewound Resistors



W20 Series

- CECC approved
- Suitable for harsh environments
- Impervious lead free vitreous enamel coating
- Overload characteristics ideal for protection circuits
- High stability and reliability
- High power dissipation for size

Electrical Data

Commercial		W21	W215	W22	W23	W24
Power rating at 25°C	watts	3.0	5.0	7.0	10.5	14.0
Resistance range at 1% tolerance	ohms	1R to 10K	1R to 15K	1R to 22K	1R to 60K	1R to 100K
2% tolerance	ohms	0R5 to 10K	0R5 to 15K	0R5 to 22K	1R to 60K	1R to 100K
5% tolerance	ohms	0R1 to 10K	0R1 to 15K	0R1 to 22K	0R15 to 60K	0R2 to 100K
TCR (-55° to 200°C)	pp/°C	-	Typically: <+-7	5	Maximum: +-2	200


BS CECC 40-201-002 Requirements	Style	JB	НВ	KB	LB	MB
Power rating at 25°C	watts	2.9	5.0	7.0	10.5	14.0
Power rating at 70°C	watts	2.5	4.3	6.0	9.0	12.0
Resistance range at 1% tolerance	ohms	1R to 10K	1R to 15K	1R to 20K	1R to 56K	1R to 100K
2% tolerance	ohms	0R5 to 10K	0R5 to 15K	0R5 to 20K	1R to 56K	1R to 100K
5% tolerance	ohms	0R1 to 10K	0R1 to 15K	0R1 to 20K	0R15 to 56K	0R2 to 100K
TCR (-55° to 200°C)	ppm/°C	≥5 oh	ms < 10 ohms	: ±400 ≥	≥10 ohms: ±20	00


This table indicates the CECC specification requirements, and these are met or exceeded by the corresponding W20 series products

Applicable to commercial and approved ranges						
Limiting element voltage	volts	100	160	200	500	750
Standard values			E24 preferred.	Other values	to special orde	r
Thermal impedance	°C/watt	88	58	44	29	22
Ambient temperature range	°C			-55 to 200		

Physical Data

Dimensions (mm) and Weight (g)						
Type	L max	D max	f min	d nom	Wt.nom	
W21	12.7	5.6	22.75	0.8	1	
W215	22.0	7.0	23.1	0.8	2	
W22	22.0	8.0	23.1	0.8	2	
W23	38.0	8.0	-	0.8	3.5	
W24	53.5	8.0	-	0.8	5	





A high purity ceramic substrate is assembled with interference fit end caps to which are welded the termination wires. The resistive element is wound on the substrate and welded to the caps; the vitreous enamel protective coating is then applied.

Terminations

Copper clad steel wire, nickel plated and solder-coated. The terminations meet the requirements of IEC 68.2.21. Strength

Solderability The terminations meet the requirements of IEC 115-1,— Clause 4.17.3.2. W23's and W24's are not supplied on tape. Minimum lead length is 30 mm.


MarkingThe resistors are legend marked with type reference, resistance value and tolerance. Values are marked in accordance with IEC 62.

General Note

Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.

Welwyn A subsidiary of

© Welwyn Components Limited · Bedlington, Northumberland NE22 7AA, UK
Telephone: +44 (0) 1670 822181 · Facsimile: +44 (0) 1670 829465 · Email: info@welwyn-tt.com · Website: www.welwyn-tt.com



W20_C.qxd 28/4/03 10:19 am Page 2

Vitreous Enamelled Wirewound Resistors

W20 Series



Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuits.

Flammability


All materials used in the construction of 'W' series resistors are inorganic and inherently non burning.

Performance Data

		CECC 40201-002	Actual Pe	rformance
	1	Requirements	Maximum	Typical
Load at commercial rating: 1000 hrs at 25°c	∆R%		5	3.5
Load at CECC rating: 1000 hours at 25°c	ΔR%	5	5	3.5
Dry heat: 1000 hours at 200°c	∆R%	5	2	1
Shelf life: 12 months at room temperature	∆R%	not specified	0.03	0.02
Derating			see derating curve	
Short term overload	ΔR%	1	1.0	0.2
Climatic	∆R%	5	0.5	0.2
Climatic category	∆R%	55/200/56		
Long term damp heat	∆R%	5	0.05	0.02
Temperature rapid change	∆R%	1	0.5	0.2
Resistance to solder heat	ΔR%	1	0.25	0.03
Vibration and bump	∆R%	1	0.25	0.05
Noise (in decade of frequency)	μν/ν	not specified	zero	zero
Robustness	∆R%	1	0.4	0.05
Insulation resistance	ohms	not specified	>.1G ohm	>.1G ohm
Voltage Proof	volts	not specified	500 min	500 min
Pulse handling			data available by request	


Application Notes

The termination should not be bent closer than 1.6mm from the body, and the recommended minimum bend radius is 1.2mm. The terminations are solderable to within 4mm from the body. When cold, vitreous enamel has excellent insulation resistance. In common with all insulants the specific resistance of the enamel decreases with increase in temperature. Therefore, resistors operated at near maximum temperature cannot be classed as insulated and should not be used in contact with any conducting material. Care must be taken when determining clearance distance between the resistor body and the printed circuit board or other components to ensure these are not over heated. Resistance is measured 6mm from body.



Packaging

For W21 and W215 the standard method of packaging is taped in Ammo Packs. For W22 the standard method of packaging is taped and reeled. Alternatives available by special request are detailed in the table below. W23's and W24's are available only as loose packed in boxes. W series resistors can be supplied preformed. Contact factory for details



Туре	b
W21	63±2
W215	73±2
W22	73±2

© Welwyn Components Limited Bedlington, Northumberland NE22 7AA, UK Telephone: +44 (0) 1670 822181 · Facsimile: +44 (0) 1670 829465 · Email: info@welwyn-tt.com · Website: www.welwyn-tt.com




Vitreous Enamelled Wirewound Resistors



W20 Series

Ordering Procedure

Example: W22 at 3.3 kilohms and 5% tolerance on a reel of 700 pieces -

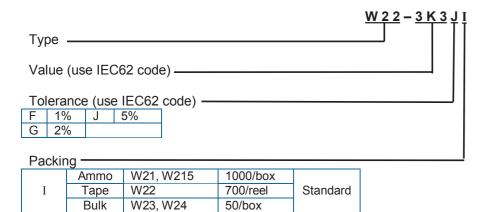

For CECC released product state on order the CECC number and style. Example: **W22-3K3JI CECC40201-002 KB** For SnPb finish instead of Pb-free replace the packing suffix with **PB**. Example: **W22-3K3JPB**

© Welwyn Components Limited Bedlington, Northumberland NE22 7AA, UK Telephone: +44 (0) 1670 822181 · Facsimile: +44 (0) 1670 829465 · Email: info@welwyn-tt.com · Website: www.welwyn-tt.com

07.11