




METAL OXIDE VARISTOR

# ZENAMIC

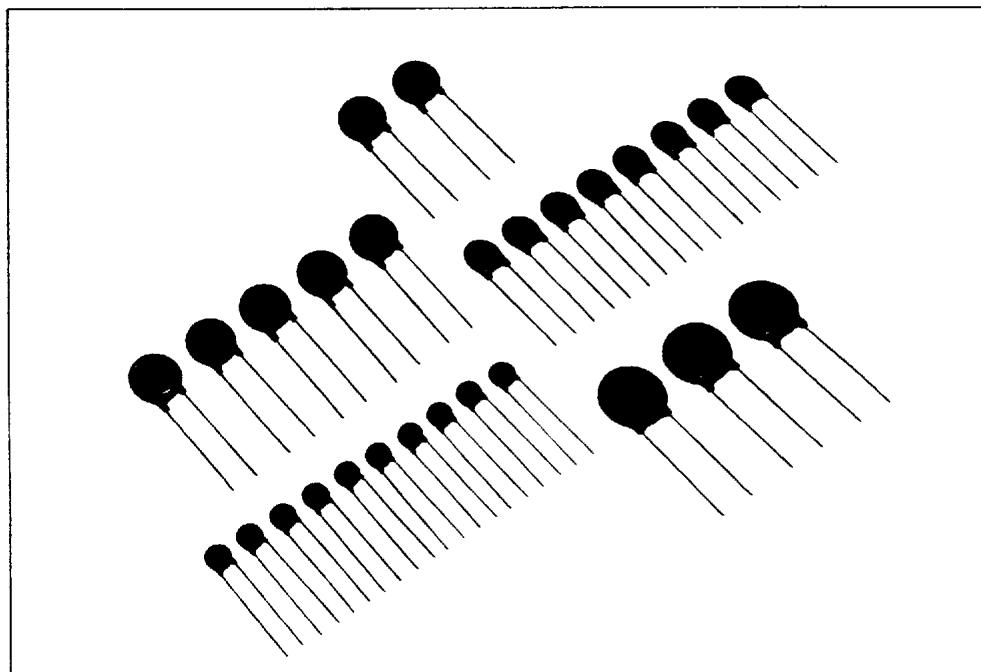

ZENAMIC is the product name of a metal oxide varistor.

### Features

- High energy absorption
- Excellent voltage clamping characteristics
- Symmetrical characteristics — for use on AC or DC
- Fast response
- Compact and robust construction
- Low idle power
- High surge current capability
- Specific types for PACE/paks and Solid State Relays

### Applications

- For protection of all types of semiconductors
- Suppression of switching transients
- Voltage clipping, and circuit damping
- Absorption of surge voltages associated with lightning strikes
- Prolongation of contact life
- Protection in industrial switching circuits

Zenamic voltage suppressors are metal oxide varistors having a non-linear current-voltage characteristic which exhibits an almost constant voltage over a wide range of current. They are ideally suited to all transient voltage protection applications and their high clamping ratios and low steady state power consumption offer considerable circuit advantages over more traditional methods of protection.

Normally the Zenamic idles at a low current level at the nominal voltage. When a transient over-voltage occurs in the circuit, the Zenamic current increases rapidly, its voltage remaining virtually constant. The transient energy is thus absorbed by the Zenamic and the associated circuit impedances.

## V-I characteristics

ZENAMIC has the forward-reverse symmetrical electrical characteristics as shown in the figure 1. The voltage-current curves show the varistor characteristics in the range  $1\text{ }\mu\text{A}$  to  $10^4\text{ A}$ , and show the resistance characteristics for the range under  $1\text{ }\mu\text{A}$  and over  $10^4\text{ A}$  in the figure 2. The voltage across terminals when test current ( $I_t$ : 1 mA) is applied to ZENAMIC is a standard varistor voltage ( $V_z$ ), and the voltage across terminals when a standard surge ( $I_p$ ) is applied represents the maximum suppression voltage ( $V_c$ ).

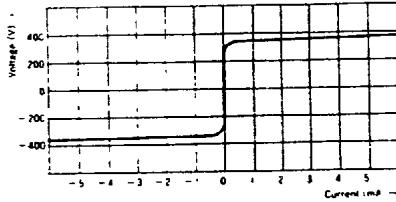


Fig 1

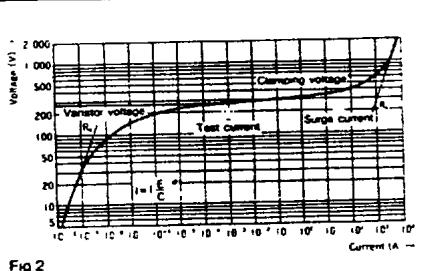


Fig 2

## Temperature Characteristics

In the small current range, Zenamic features outstanding temperature characteristics. A shunt resistance  $R_p$  of metal oxide varistor has the temperature characteristics which is determined by the following equation.

$$R_p = A e^{Eg/2kT} \quad (2)$$

T: Absolute temperature  
k: Boltzmann constant  
A, Eg constants

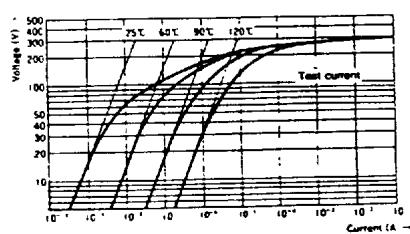


Fig 3

As shown in the figure 3, the temperature dependence characteristics are shown clearly in the low current area.

## Power derating

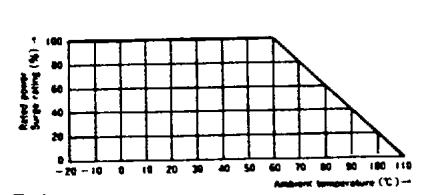


Fig 4

## Surge waveform

A surge waveform varies according to the sources. An EXP waveform is used for surge testing of ZENAMIC, while a AC half-wave is used for the energy absorption test. The EXP waveform reaches its peak voltage (current) at [ta] as shown in the figure 5, and then decreases as time passes and reaches half of the peak voltage (current) at [tb]. This type of the EXP waveform is shown as a [ta/tb] voltage (current) waveform. For surge testing of ZENAMIC, the 8/20 μsec current waveform is used.


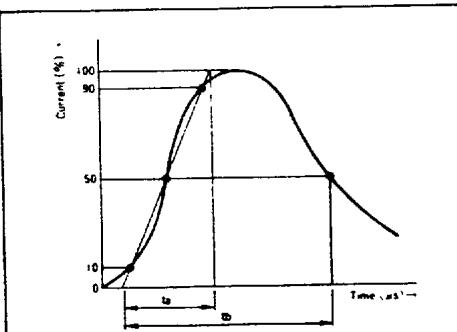


Fig 5

## Type No.

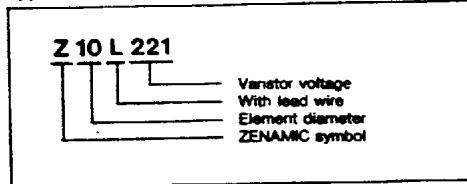


## Application

A few example show.


Power lines and surge absorption units with error display (SA series).

### Line to Line protection

DC  
AC Single phase




AC three phase




### Line to Line and Line to Ground protection

DC  
AC Single phase





AC three phase



### Switching surge protection

### Semiconductor protection

### Contact spark suppression




# Z7L Series


## Specifications

Type No.	Varistor voltage V <sub>rms</sub> (V)	Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (2ms)	Withstanding surge current (8/20μs)		Typical capacitance (@1kHz) pF
		AC	DC				V	W	
Z7L180	18 (16~20)	11	14	36 at 2.5A		0.8			3,500
Z7L220	22 (20~24)	14	18	43		0.9			2,800
Z7L270	27 (24~30)	17	22	53		1.0			2,000
Z7L330	33 (30~36)	20	26	65		1.2			1,500
Z7L390	39 (35~43)	25	31	77		1.5			1,350
Z7L470	47 (42~52)	30	38	93		1.8			1,150
Z7L580	58 (50~62)	35	45	110		2.2			950
Z7L680	68 (61~75)	40	56	135		2.5			700
Z7L820	82 (74~90)	50	65	135 at 10A		3.5			550
Z7L101	100 (90~110)	60	85	165		4.0			550
Z7L121	120 (108~132)	75	100	200		5.0			450
Z7L151	150 (135~165)	95	125	250		8.0			350
Z7L181	180 (162~198)	110	145	300		10.0			300
• Z7L201	200 (185~225)	130	170	340		10.0			280
• Z7L221	220 (198~242)	140	180	360		10.0			230
• Z7L271	270 (247~303)	175	225	455		12.0			170
• Z7L331	330 (297~363)	210	275	550		15.0			150
• Z7L361	360 (324~396)	230	300	585		15.0			130
• Z7L391	390 (351~429)	250	320	850		20.0			110
• Z7L431	430 (387~473)	275	350	710		20.0			100
• Z7L471	470 (423~517)	300	385	775		20.0			

## V-I characteristics

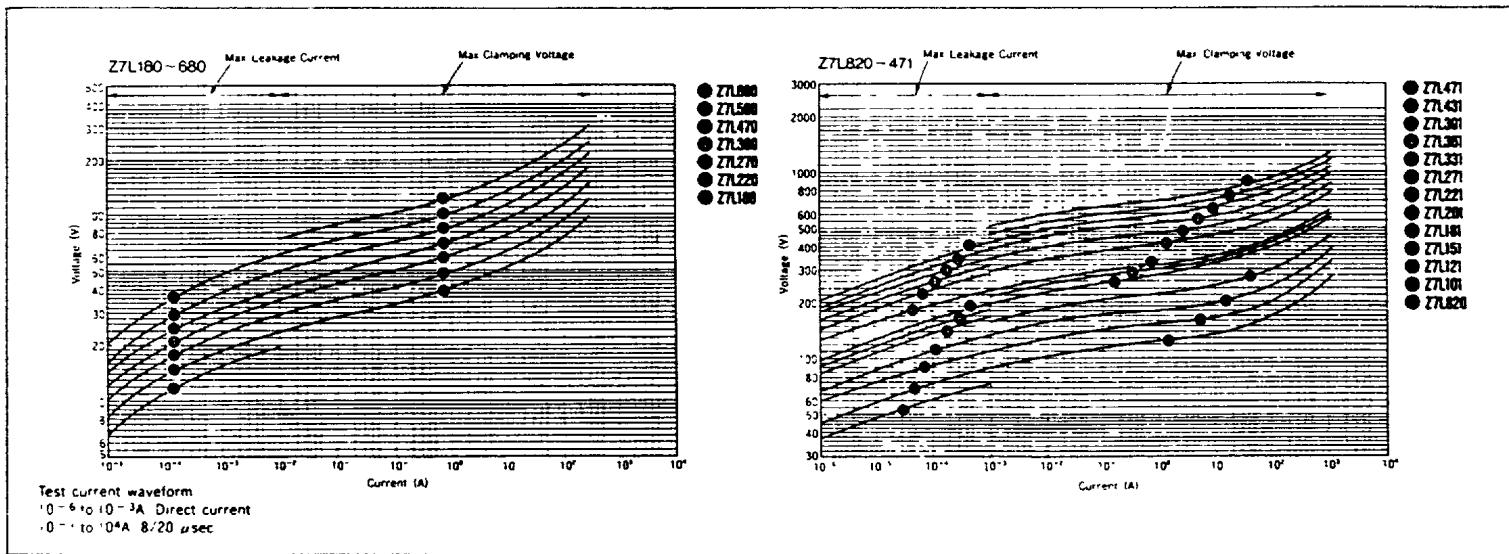

Surge Life Time Ratings (Relation between impulse width and surge repetition time)

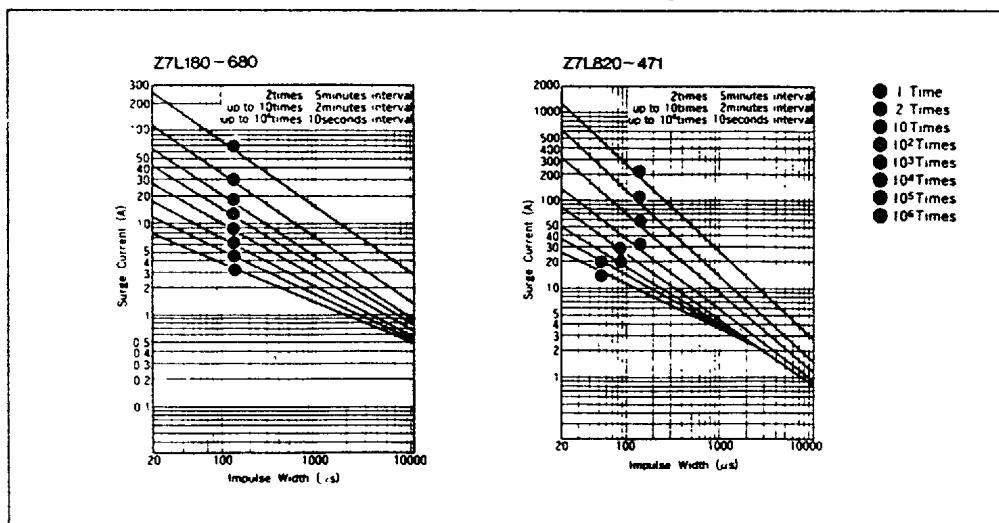

1 Operating temperature range -40 to 85 °C

2 Storage temperature range -40 to 125 °C


3 \* UL approved model

# Z10L Series


## Specifications

Type No.	Varistor voltage V <sub>1mA</sub> (V)	Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (2ms)	Withstanding Surge Current (8/20μs)		Typical capacitance (6.1kV) pF
		AC	DC				V <sub>rma</sub>	V	
Z10L180	18 (16~20)	11	14	36 at 5A		1.5			7,500
Z10L220	22 (20~24)	14	18	43		2.0			6,000
Z10L270	27 (24~30)	17	22	53		2.5			4,000
Z10L330	33 (30~36)	20	28	65		3.0			3,000
Z10L390	39 (35~43)	23	31	77		3.5			2,600
Z10L470	47 (42~52)	30	38	93		4.5			2,200
Z10L560	56 (50~62)	35	45	110		5.5			1,800
Z10L680	68 (61~75)	40	55	135		6.5			1,300
Z10L620	82 (74~90)	60	85	135 at 25A		8			1,800
Z10L101	100 (90~110)	80	105	165		10			1,500
Z10L121	120 (108~132)	75	100	200		12			1,100
Z10L151	150 (135~165)	95	125	250		15			900
Z10L181	180 (162~198)	110	145	300		18			700
Z10L201	200 (185~225)	130	170	340		20			500
Z10L221	220 (198~242)	140	180	360		23			350
Z10L271	270 (247~303)	175	225	455		30			330
Z10L331	330 (297~363)	210	275	560		33			300
Z10L361	360 (324~396)	230	300	595		40			270
Z10L391	390 (351~429)	250	320	650		45			250
Z10L431	430 (387~473)	275	350	710		45			230
Z10L471	470 (423~517)	300	385	775		45			150
Z10L561	560 (504~616)	350	460	925		45			130
Z10L681	680 (612~748)	420	560	1,120		50			120
Z10L751	750 (675~825)	460	615	1,240		55			110
Z10L821	820 (738~902)	510	670	1,355		60			100
Z10L911	910 (819~1,001)	550	745	1,500		65			90
Z10L102	1,000 (900~1,100)	625	825	1,650					

## V-I characteristics

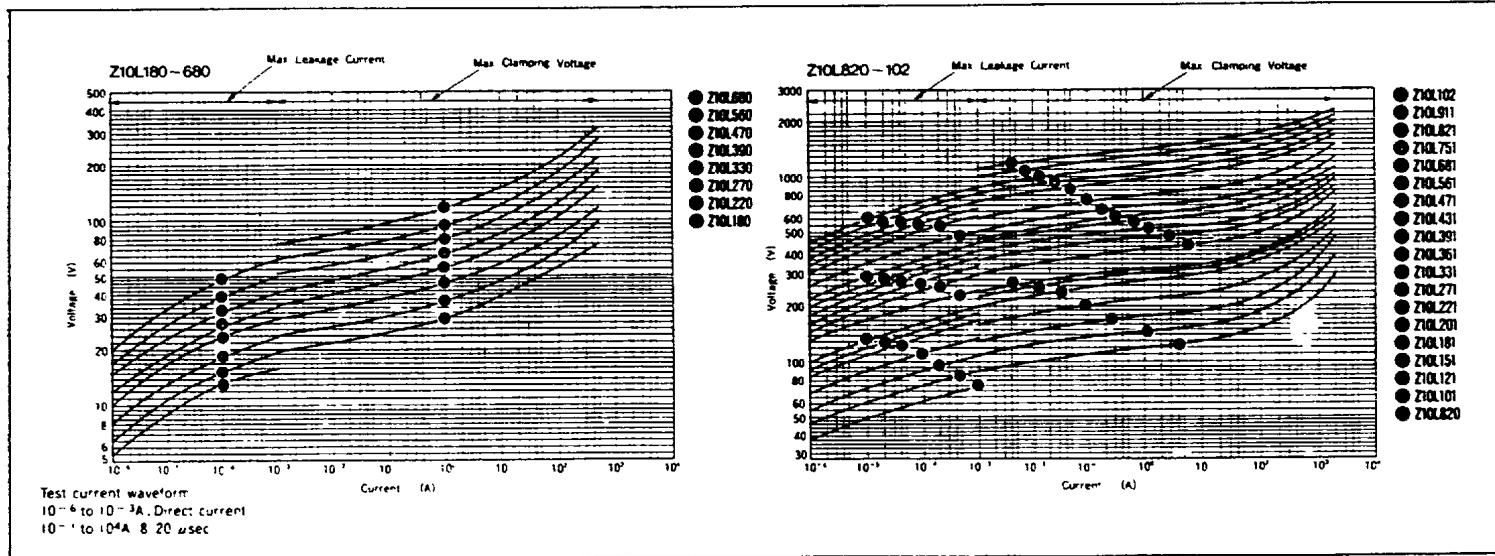

## Surge Life Time Ratings (Relation between impulse width and surge repetition time)

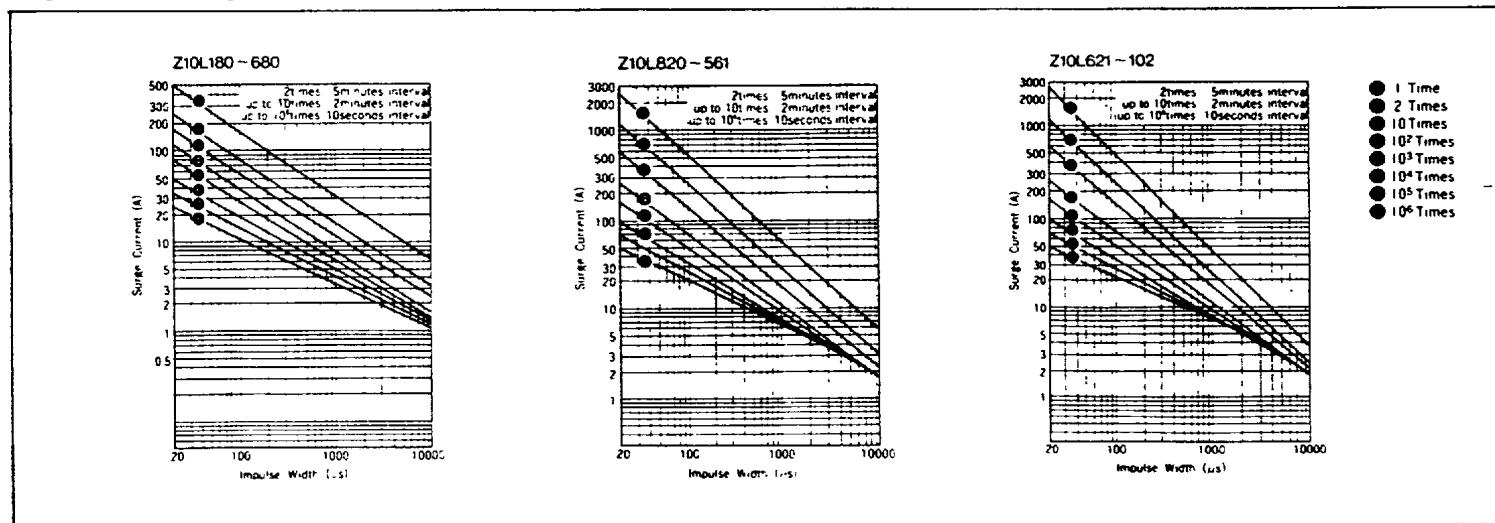

1. Operating temperature range -40 to 85 °C

2. Storage temperature range -40 to 125 °C


3. \* : UL approved model

# Z15L Series


Specifications

Type No.	Varistor voltage V <sub>rms</sub> (V)	Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (2mA)	Withstanding surge current (8/20μs)		Typical capacitance (@1kHz)
		AC	DC				1 Time	2 Times	
		Min	Max	V <sub>rms</sub>	V	W	pF		
Z15L160	16 ( 16 ~ 20 )	11	14	36 at 10A		3.5			18,000
Z15L220	22 ( 20 ~ 24 )	14	18	43		4.0			15,000
Z15L270	27 ( 24 ~ 30 )	17	22	53		5.0			10,000
Z15L330	33 ( 30 ~ 36 )	20	26	65		6.0			7,500
Z15L390	39 ( 35 ~ 43 )	25	31	77		7.0			6,500
Z15L470	47 ( 42 ~ 52 )	30	38	93	0.1	8.5	1000A	500A	5,500
Z15L560	56 ( 50 ~ 62 )	36	45	110		10.0			4,500
Z15L680	68 ( 61 ~ 75 )	43	56	135		12.0			3,300
Z15L820	82 ( 74 ~ 90 )	50	65	135 at 50A		14			
Z15L101	100 ( 90 ~ 110 )	60	85	165		18			2,900
Z15L121	120 ( 108 ~ 132 )	75	100	200		20			2,400
Z15L151	150 ( 135 ~ 165 )	95	125	235		25			1,800
Z15L181	180 ( 162 ~ 198 )	110	145	300		30			1,500
Z15L201	200 ( 185 ~ 225 )	130	180	345		35			1,200
Z15L221	220 ( 198 ~ 242 )	140	185	380		40			1,000
Z15L271	270 ( 247 ~ 303 )	175	225	455		50			650
Z15L331	330 ( 297 ~ 363 )	210	275	550		65			550
Z15L361	360 ( 324 ~ 366 )	230	300	595		70			500
Z15L391	390 ( 351 ~ 429 )	250	320	650		75			450
Z15L431	430 ( 387 ~ 473 )	275	350	715		80			400
Z15L471	470 ( 423 ~ 517 )	300	385	775		90			300
Z15L561	560 ( 504 ~ 616 )	350	460	825		90			250
Z15L681	680 ( 612 ~ 748 )	420	560	1,120		100			200
Z15L751	750 ( 675 ~ 825 )	480	615	1,240		110			180
Z15L821	820 ( 738 ~ 902 )	510	670	1,355		120			150
Z15L911	910 ( 819 ~ 1,001 )	550	745	1,500		130			
Z15L102	1,000 ( 900 ~ 1,100 )	625	825	1,650					

## V-I characteristics

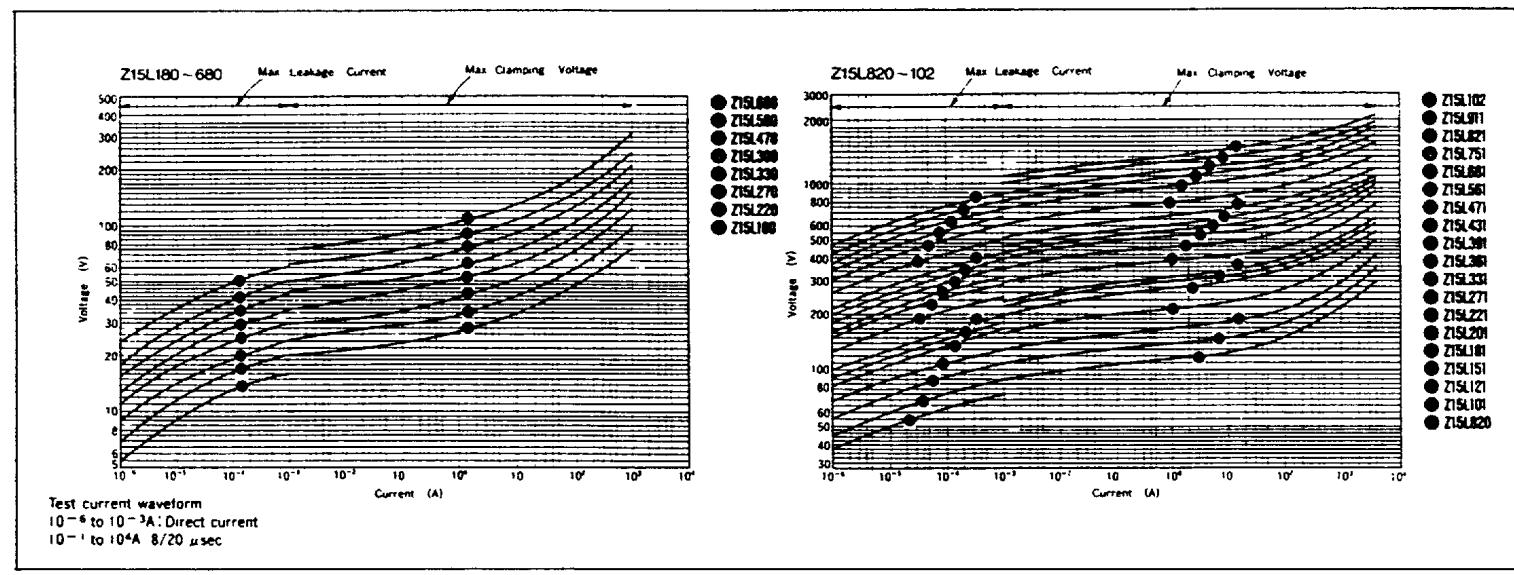

## Surge Life Time Ratings (Relation between impulse width and surge repetition time)

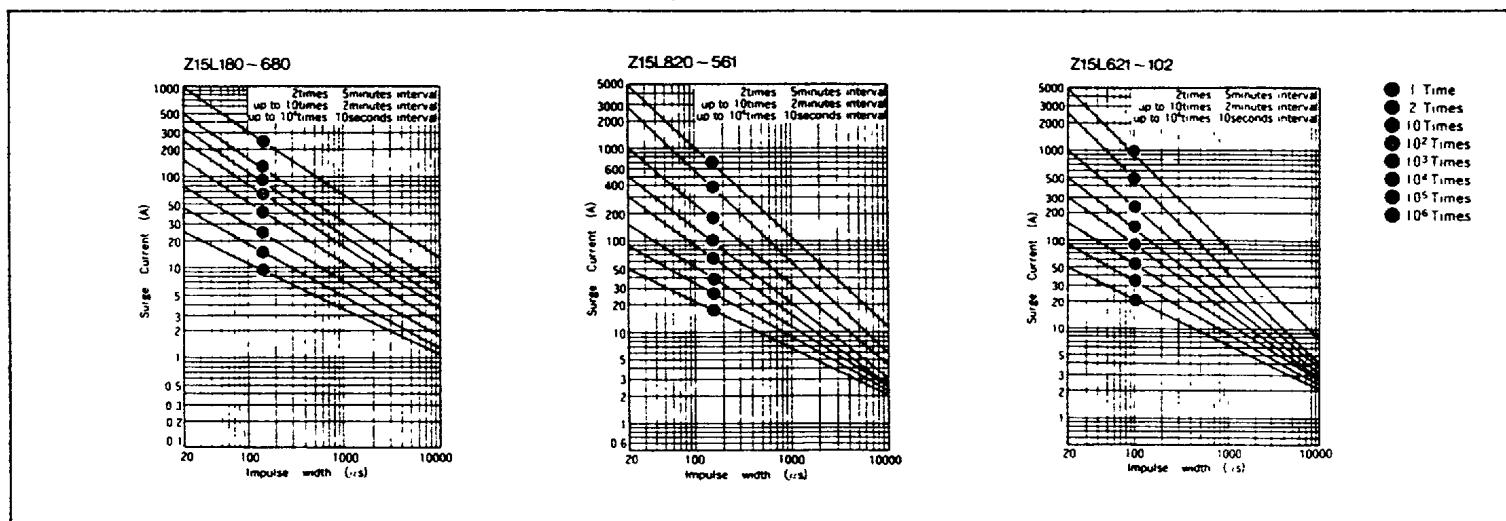

1. Operating temperature range: -40 to 85 °C

2. Storage temperature range: -40 to 125 °C


3. \*: UL approved model

# Z21L Series


## Specifications

Type No.	Varistor voltage V <sub>mA</sub> (V)	Maximum allowable voltage		Maximum clamping voltage V	Rated wattage W	Energy (2ms) J	Withstanding surge current (8/20μs)		Typical capacitance (@ 1kHz) PF
		AC (Min)	DC (Max)				V	1 Time	
Z21L180	18 (16~20)	11	14	36 at 20A		10			37,000
Z21L220	22 (20~24)	14	18	43		13			30,000
Z21L270	27 (24~30)	17	22	53		15			22,000
Z21L330	33 (30~36)	20	26	65		20			17,000
Z21L390	39 (35~43)	25	31	77		24			15,000
Z21L470	47 (42~52)	30	38	93		30			13,000
Z21L560	56 (50~62)	35	45	110		35			11,000
Z21L680	68 (61~75)	40	56	135		40			7,000
Z21L820	82 (74~90)	50	65	135 at 100A		27			5,500
Z21L101	100 (90~110)	60	85	165		30			4,800
Z21L121	120 (108~132)	75	100	200		40			3,800
Z21L151	150 (135~165)	95	125	250		50			3,000
Z21L181	180 (162~198)	110	145	300		65			2,500
Z21L201	200 (185~225)	130	170	340		70			2,000
Z21L221	220 (198~242)	140	180	380		75			2,000
Z21L271	270 (247~303)	175	225	455		90			1,800
Z21L331	330 (297~363)	210	275	550		110			1,400
Z21L361	360 (324~396)	230	300	595		120			1,200
Z21L391	390 (351~429)	250	320	650		130			1,000
Z21L431	430 (387~473)	275	350	710		140			900
Z21L471	470 (423~517)	300	385	775		150			800
Z21L561	560 (504~616)	350	460	925		150			600
Z21L681	680 (612~748)	420	560	1,120		160			460
Z21L751	750 (675~825)	460	615	1,240		175			420
Z21L821	820 (738~902)	510	670	1,355		190			400
Z21L911	910 (819~1,001)	550	745	1,500		215			350
Z21L102	1,000 (900~1,100)	625	825	1,650		230			320

## V-I characteristics

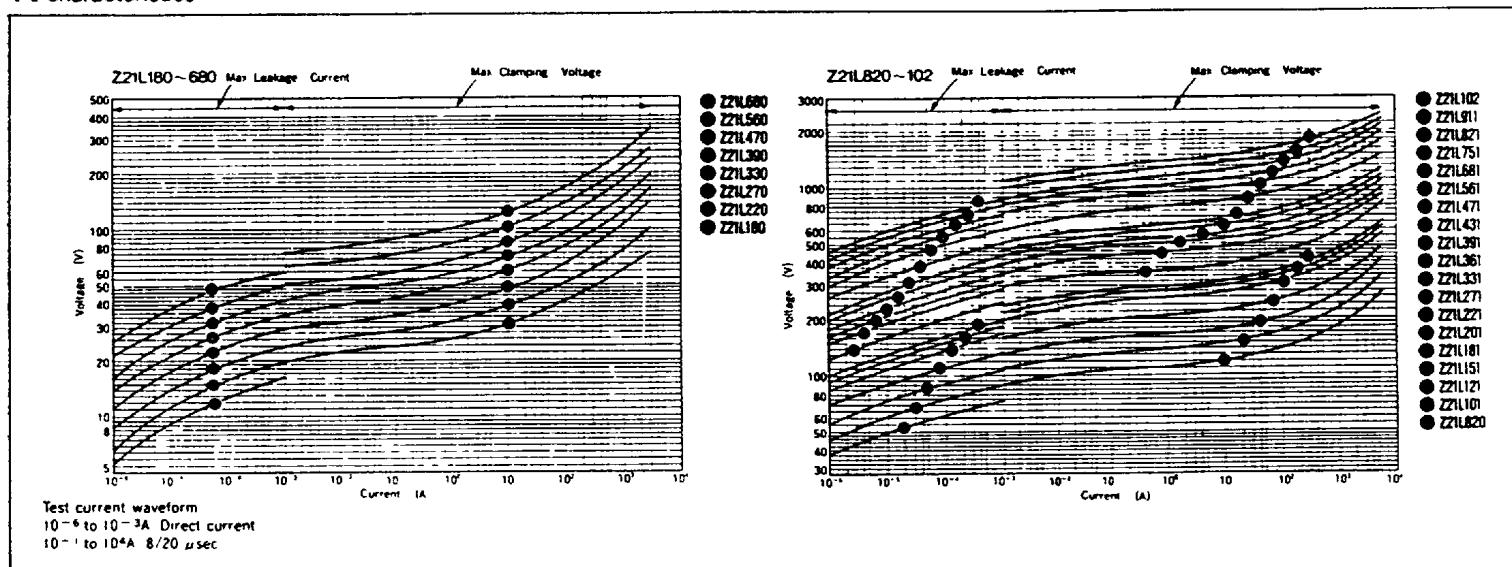

## Surge Life Time Ratings (Relation between impulse width and surge repetition time)

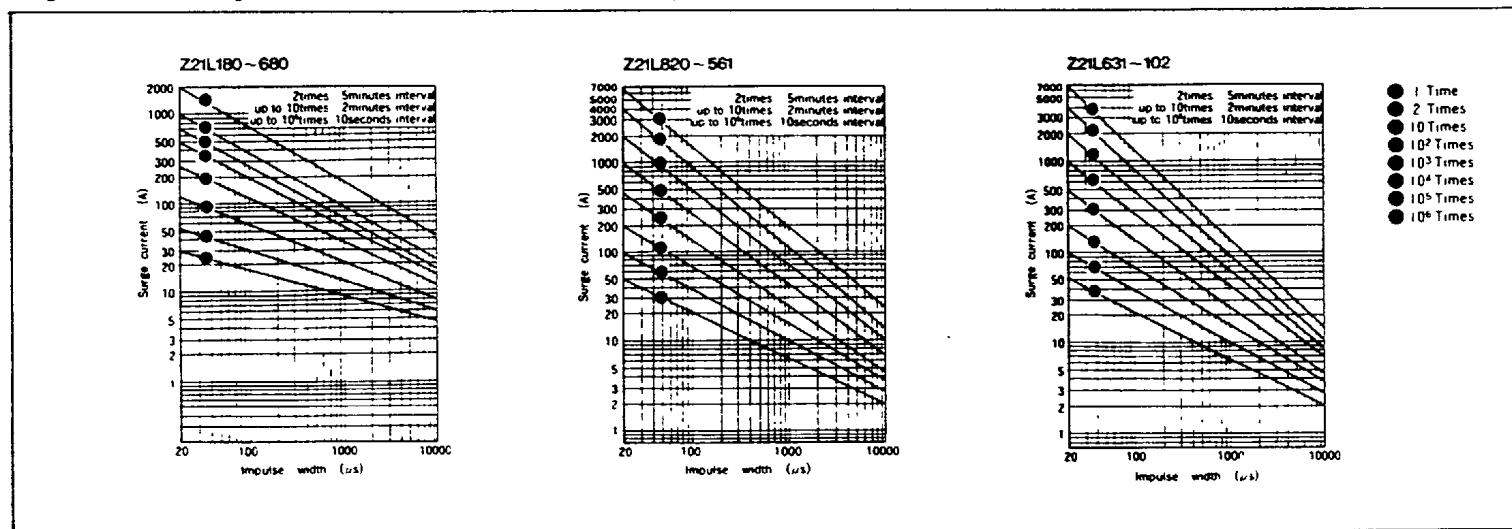

1. Operating temperature range: -40 to 85 °C

2. Storage temperature range: -40 to 125 °C

3. \* : UL approved model

# Z25M, Z33M Series


## Specifications

Type No.	Varistor voltage $V_{1mA}$ (V)	Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (2mA)	Withstanding surge current (8/20μs)		Typical capacitance (@ 1kHz)
		AC	DC				V	W	
Z25M221S	220 (187 ~ 253)	120	165	360 at 100A		125			3.300
Z25M271S	270 (229.5 ~ 310.5)	150	210	465		155			2.200
Z25M331S	330 (280.5 ~ 379.5)	175	245	570		185			1.900
Z25M391S	390 (331.5 ~ 448.5)	210	295	675		215			1.700
Z25M441S	440 (374 ~ 506)	240	335	760		225			1.500
Z25M4471S	470 (399.5 ~ 540.5)	250	350	810	10	235	15000A	10000A	1.500
Z25M4561S	560 (476 ~ 644)	300	420	970		260			1.400
Z25M581S	680 (578 ~ 782)	365	510	1,175		280			1.250
Z25M621S	820 (697 ~ 943)	440	615	1,415		330			800
Z25M102S	1000 (850 ~ 1,150)	520	730	1,725		375			500
Z33M4221S	220 (187 ~ 253)	120	165	360 at 100A		200			5.500
Z33M271S	270 (229.5 ~ 310.5)	150	210	465		255			4.200
Z33M331S	330 (280.5 ~ 379.5)	175	245	570		310			3.700
Z33M391S	390 (331.5 ~ 448.5)	210	295	675		360			3.200
Z33M441S	440 (374 ~ 506)	240	335	760		370			2.800
Z33M4471S	470 (399.5 ~ 540.5)	250	350	810		385			2.600
Z33M4561S	560 (476 ~ 644)	300	420	970		425			2.200
Z33M581S	680 (578 ~ 782)	365	510	1,175		460			1.800
Z33M621S	820 (697 ~ 943)	440	615	1,415		590			1.500
Z33M102S	1000 (850 ~ 1,150)	520	730	1,725		620			1.000


1. Operating temperature range: -40 to 85°C

2. Storage temperature range: -40 to 125°C

## Dimensions

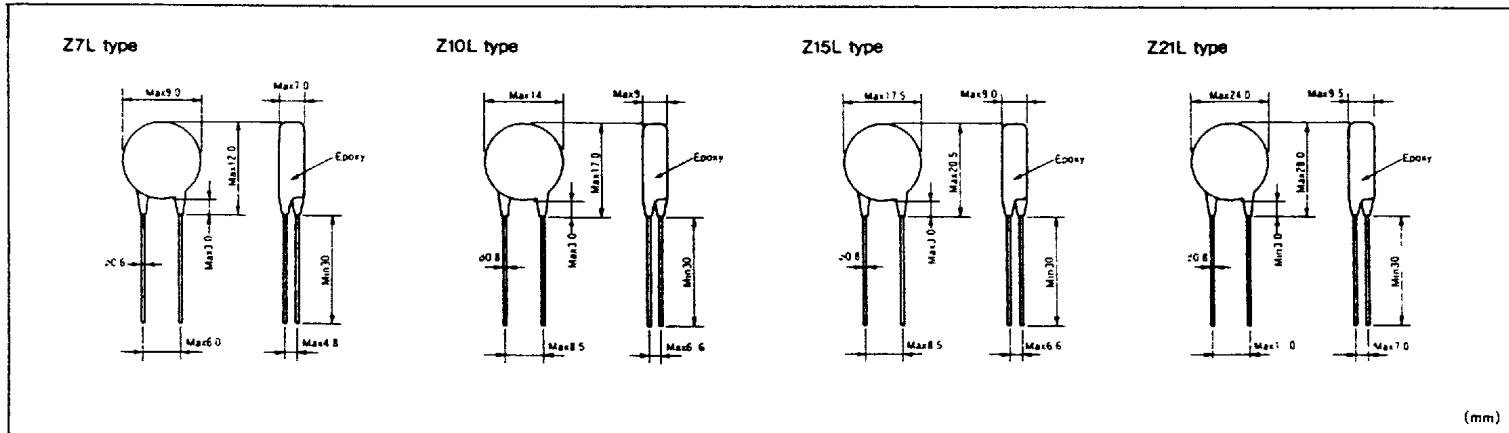

## Dimensions

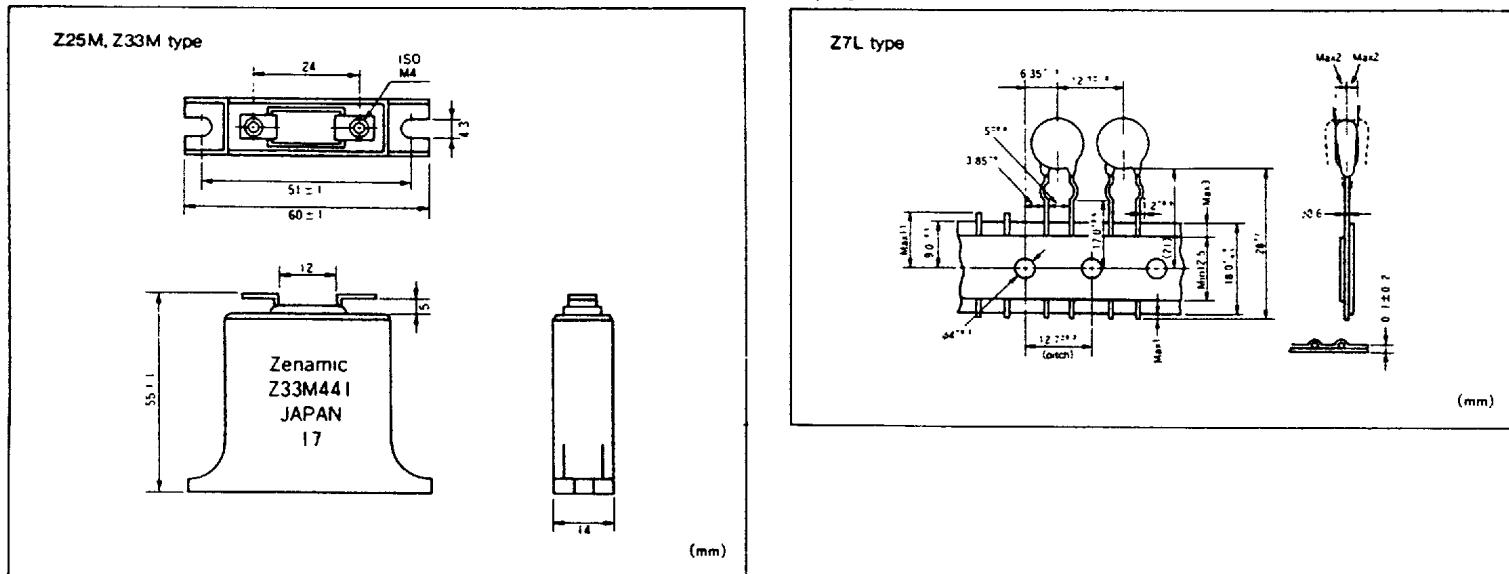

## Taping

