

Order code: 42R021112

17) IN-/OUTLETS IEC 60320

Series: **615**


Power inlet, flange version, horizontal mount. Variations with 36 mm and 40 mm centre hole distance available.
Former K+B series 731

36 mm hole separation for counter-sunk screws


Inlet / Outlet Configuration	Inlet A - Standard C14 (70°)
Mounting	Horizontal
Inlet termination	P - Quick connect 4,8
No of fuses	0
Voltage selector	Without
Switch	None
Rated current	10,0 A (15,0 A acc. UL)
Rated voltage	250 V _{RMS}
Approvals	

Z 10,00

Configuration/Standard sheet number please see technical data

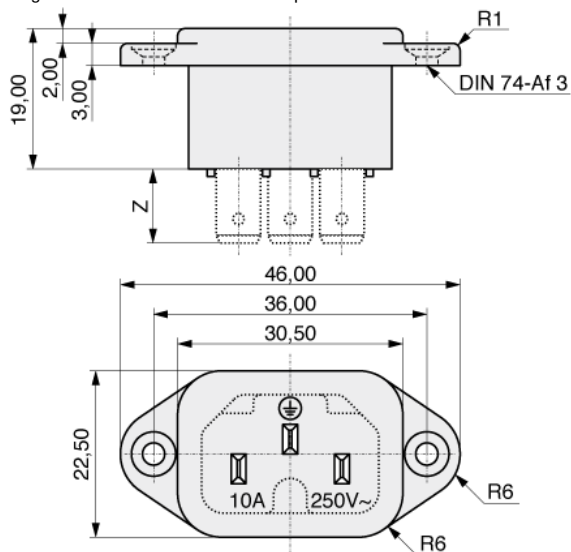

Mounting hole

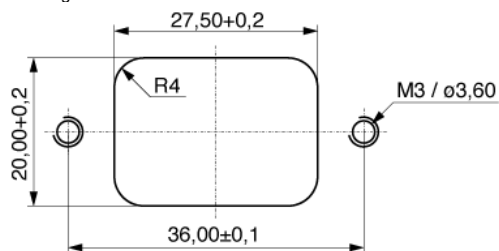**Order code: 42R021112**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 10.06.2014 Internet: http://www.kb-connector.de/index.php?lang=en&menu=4&distributor=106&s_product=42R021112