


Rating	30A
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Color	Black

Material:
 Plug: brass with nickel plated.
 Handle: PVC.
 Fits $\phi 4\text{mm}$ banana plug or O.D. less $\phi 4\text{mm}$ wire by soldering, please cut the end of PVC handle to fit wire's diameter.
 Fits $\phi 4\text{mm}$ standard banana socket.
 RoHS compliance.

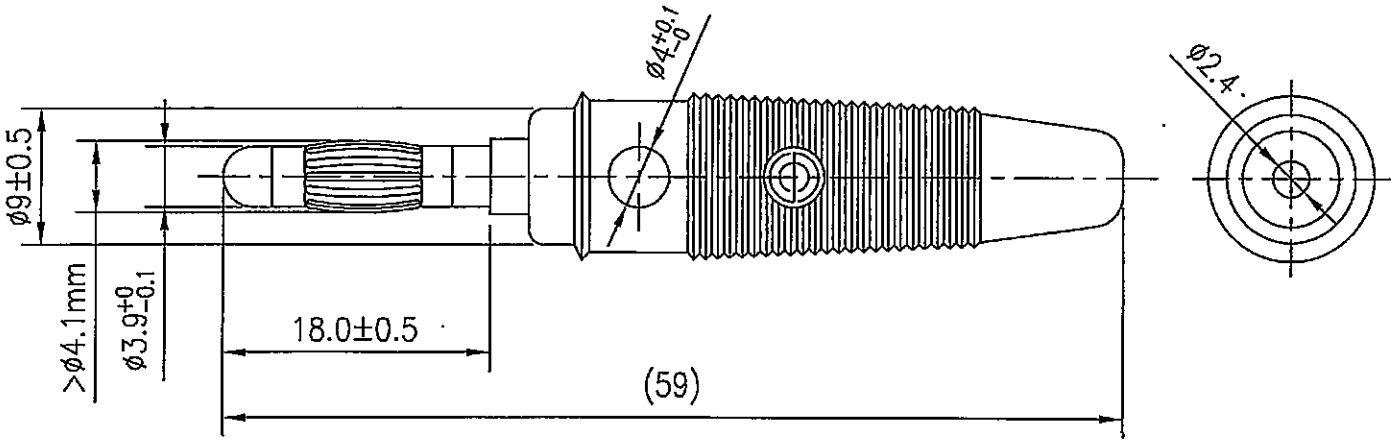

							△	
							△	
Date	Name	Description					No.	
Drawn	Checked	Approved	SCI BOM No.	1540091	Model Name	BANANA PLUGS		
柳新強		<i>Sma</i>	Customer No.		Model No.	R8-25A	Rev.	
12/21/16		12/21-16	Unit	mm	Shin Chin Industrial Co., Ltd.			X0