


Number of contacts

max. 48

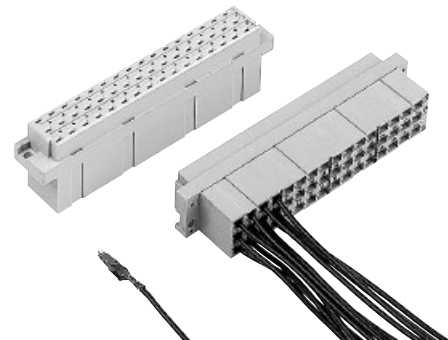

Female connectors

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
Female connector for crimp contacts Order contacts separately	48	09 05 048 3202 ¹⁾ 09 05 548 3202 ²⁾	<p>85, 84, 11,6, 14,8, 13,6, 2,9, 15,1, 2,8^{+0,1}, 90^{+0,1}, 2e, 2c, 2a, 5, 5,1, 15,7, 0,2, 5,08, 15 x 5,08 = 76,20, 8,17, 95^{-0,4}</p> <p>Contact arrangement View from termination side</p> <p>Shell housing 09 05 048 0501 see chapter 20</p>	

DIN Power up to 6 A

Identification	Identification Wire gauge	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00
		2	1
Female crimp FC contacts			
Bandoliered contacts (approx. 2,500 pieces)	1	09 06 000 6484	09 06 000 6474
	2	09 06 000 6481	09 06 000 6471
	3	09 06 000 6482	09 06 000 6472
Bandoliered contacts (approx. 250 pieces)	1	09 06 000 7484	09 06 000 7474
	2	09 06 000 7481	09 06 000 7471
	3	09 06 000 7482	09 06 000 7472
Individual contacts ¹⁾	1	09 06 000 8484	09 06 000 8474
	2	09 06 000 8481	09 06 000 8471
	3	09 06 000 8482	09 06 000 8472
Female contacts with solder lugs ²⁾ (lockable)			09 06 000 6420

		Wire gauge mm ²	AWG	Insulation ø mm	Identification
FC 1	1	0.09 - 0.25	28 - 24	0.7 - 1.5	<p>Bandoliered contacts</p> <p>Individual contacts</p>
FC 2	2	0.14 - 0.56	26 - 20	0.8 - 2.0	
FC 3	3	0.5 - 1.5	20 - 16	1.6 - 2.8	
3.5 + 0.5 mm of insulation is stripped from the wires to be crimped For the fabrication in line with the specification please use exclusively crimp tools approved by HARTING (see DIN EN 60352-2) Insertion, removal and crimping tools see chapter 30					

^{c)} Connectors with coding see chapter 00
^{f)} Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2

¹⁾ Packaging unit 1,000 pieces
²⁾ Solder contacts must not be used together with shell housing A. Special contact surface: 2 µm gold.