

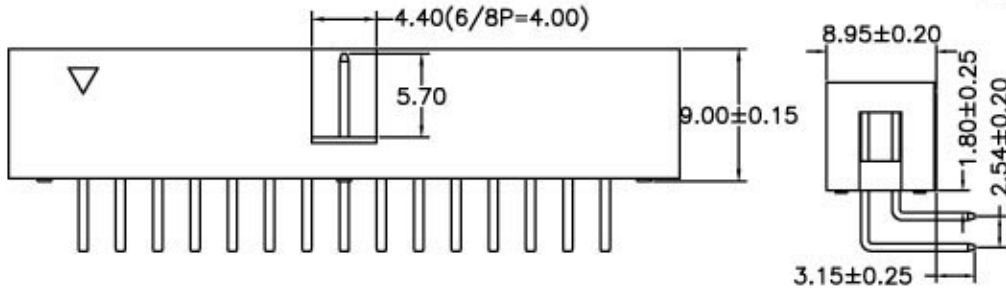


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


# SPECIFICATIONS

Current Rating: 3AMP  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstand Voltage: 1000V AC/minute  
 Operation Temperature: -40 degree up +105 degree

Contact: Brass  
 plating: Au or Sn Over 50u" Ni  
 Insulator: High Temperature Thermoplastic  
 UL94V-0 Rated  
 Standard: PBT+30%G.F

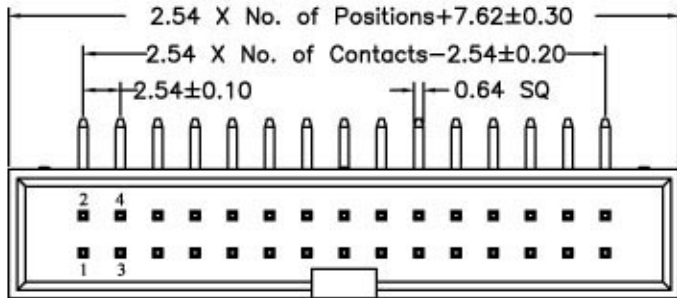

Recommended PCB Layout

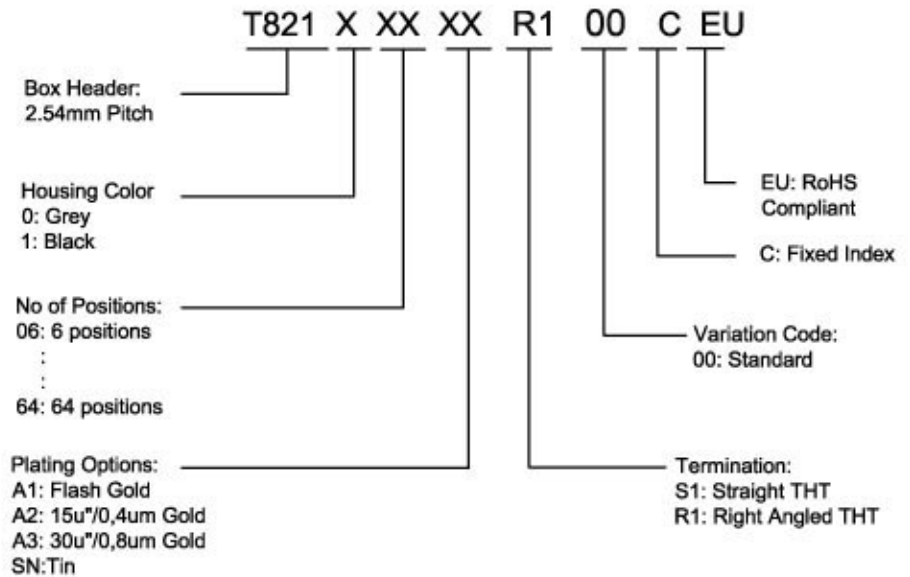

TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL	
X. ±0.3	DRAWN: Roger	12/Jun/2006	Box header, DIP 2.54mm, R/A	Amphenol European Design Center	
XX ±0.2	CHECKED: Rob K.	13/Jun/2006		Scale N.A.	Sheet 1 of 1
XXX ±0.15	APPROVED: Rob K.	14/Jun/2006			
UNLESS OTHERWISE SPECIFIED	UNIT:	SIZE: A4	DRAWING N°: T821X XX XX R100CEU	REV. A	