
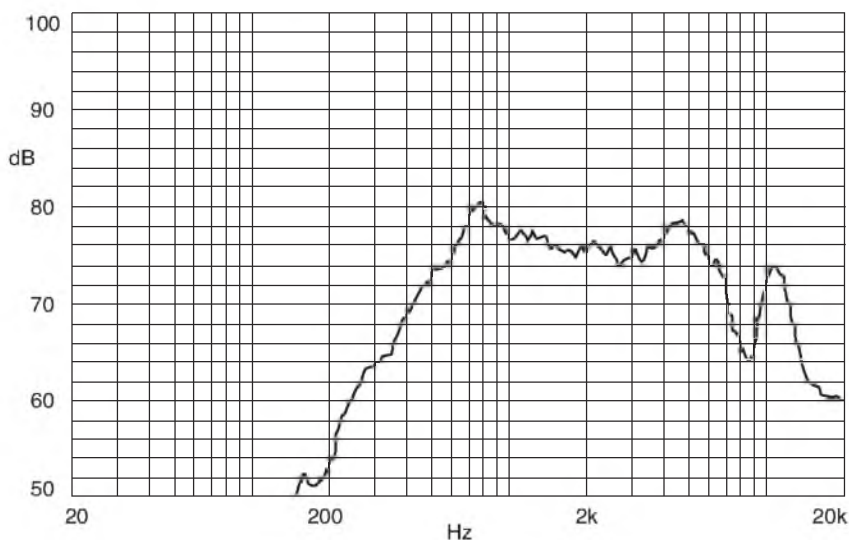


Speaker

Dimensions: mm (In.)

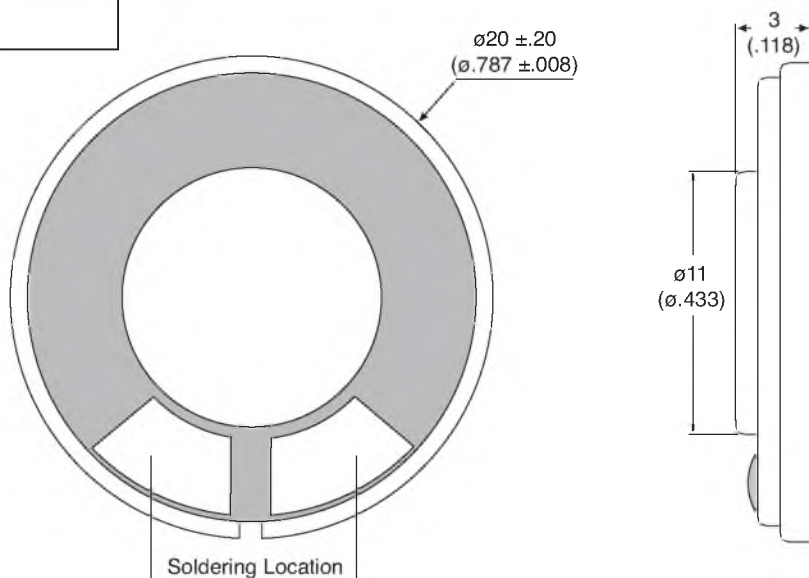

KT-400267

Electrical Specifications:

- Nominal Impedance: $8\Omega \pm 15\%$ @ 1400Hz
- Power Rating: Normal 200mW Maximum 400mW
- Lowest Resonant Frequency: 700 ± 150 Hz.
- Output Sound Pressure Level (S.P.L.): 75 ± 3 dB / 0.2W
0.5 Meter. Avg at 1000 ~ 2000Hz.
- Frequency Range: 400 ~ 6,500Hz.
- Distortion: Max. 5% at 1400Hz. 200mW

Material:

- Magnet: NDFEB
- Weight: 2.2g

Note:

- RoHS Compliant