


904 BROADBAND AMPLIFIERS

AMPLIFIER UHF-UHF-VHF/FM 2 OUTPUTS LTE

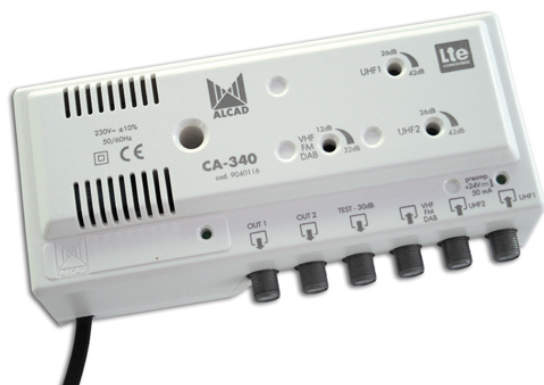

Code : **9040116**

Model : **CA-340**

Description

Broadband amplifiers for head-end, compatible with transmission of LTE mobile telephone signals. Includes a rejection filter for LTE800 signals. Equipped with three inputs to amplify and combine the signals coming from the antennas. Power supplied automatically to preamplifier. Available on request in 125 and 240 V~.

Applications

Medium-sized individual digital and analogue terrestrial TV installations which are affected by the transmission of LTE800 mobile telephone signals. It is used as the head-end amplifier of the installation. The two outputs facilitate star-shaped distributions from the head-end through the use of splitters.

Characteristics

Made from ABS plastic, with an internal zamak chassis of which provides maximum shielding. F type connectors which affords a connection with minimum mismatching and high shielding. Power supply unit insulated from the rest of the high frequency circuit, complying with all safety standards. F-type connectors for screwing on or crimping.

CODE	9040116						9040117				
MODEL	CA-340						CA-342				
TV System	AM-TV / DVB-T										
Connection	F female										
Number of outputs	2										
Number of inputs	3						4				
Frequency range	Band	BI	FM	BIII	UHF1	UHF2	BI/FM	BIII	UHF1	UHF2	
	MHz	47-70	88-108	160-260	470-790		40-108	160-260	470-790		
Gain	dB + TOL	35 ±1.0	25 ±1.0	35 ±1.0	45 ±2.0		20 ±1.0	20 ±1.0	30 ±1.0		
Adjustable gain range		20			16		20		16		
Flatness response	dB	±1.5 ±0.25(8MHz)						±1.5		±0.25	
Output level	dB μ V	2 x 110 DIN 45004B 2 x 107 (IMD3 -60 dB) 2 x 100 (IMD2 -60 dB)									
Insolation between inputs/ outputs	dB	13									
Output voltage	V $\overline{\text{---}}$	-			24 Auto	-		-		24 Auto	-
	mA	-			50	-		-		50	-
Return loss	dB	10									
Chroma - luminance delay	ns	<10									
Noise figure	dB	5.5±1.5				6.5±1.5			5.5±1.5		
Mains voltage	V \sim	230±10% 50/60 Hz									
	VA	7									
Operating temperature	°C	-10..+65									
Protection index		IP20									
Units per packaging		1						24			
Packing weight	Kg	0.58						14.42			
Packing dimensions	mm	165 x 100 x 50						385 x 370 x 205			