KLK Series, AC, Fast-Acting Midget/5AG Size Fuse





Agency Approvals			
Agency	Agency File Number	Ampere Range	
(h)	E10480	.3A - 30A	
SP.	LR 29862	.3A - 30A	
QPL	F60C		

Description

Fast-Acting, High-Interrupting Capacity, Current-Limiting Type Fuse. Especially suited for control circuits, street lighting, H.I.D. lighting, computers, and other applications without high in-rush currents.

Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	OpeningTime
100%	0–30	Until temp stabilizes
135%	0–30	1 hours, Maximum
200%	0–30	2 minutes, Maximum.


Product Characteristics

Interurrupting Rating:


Voltage Rating:


50,000 amperes at 500Vdc 100,000 amperes at 600Vac 600Vac, 500Vdc

Dimensions



Temperature Rerating Curve



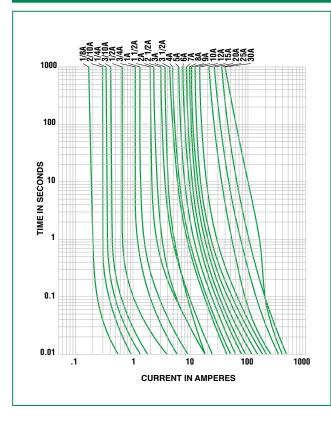

Average Time Current Curves

📶 Littelfuse