Order code: 001-2-022-4-B1STF-XT0

1) IC-SOCKETS, STRIPS, CARRIERS Series: **001**

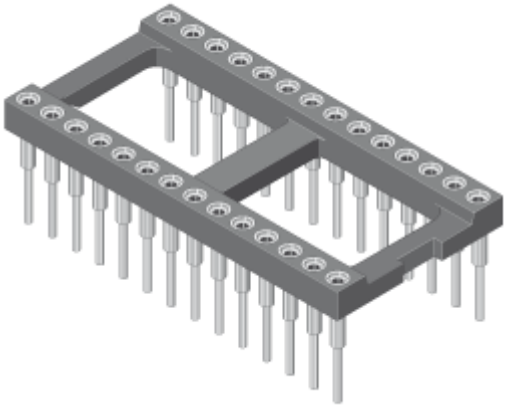

IC-sockets with machined contacts in all common pin counts and row spacing´s.
Versions with decoupling capacitor are also available.

Socket with centre bar.

Gender	Female
Pitch (mm)	2,54
Mating pin size (range)	ø 0,40-0,56, sq. 0,25x0,45
No of contacts	22
Row distance (code)	400 mil
Contact type	**B1** - Standard B



Material contact	Copper alloy
Material clip	Berylium copper
Plating contact	Sn
Plating clip	Au
Insulator Style	With Bar
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V_{RMS} / V_{DC}
Withstand voltage	1000 V_{RMS} for 1 minute
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
D (Row dist. mm)	10,16
A	27,80
B	12,60
C	7,40

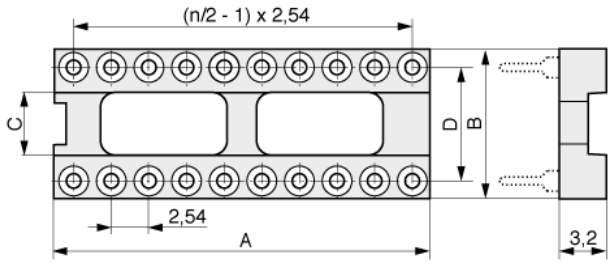

Order code: 001-2-022-4-B1STF-XT0

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 14.08.2014 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=001-2-022-4-B1STF-XT0