# Order code: 001-2-024-3-B1STF-XT0

1) IC-SOCKETS, STRIPS, CARRIERS

Series: **001**



IC-sockets with machined contacts in all common pin counts and row spacing´s. Versions with decoupling capacitor are also available.

Socket with centre bar.

| | |
|---|---|
| Gender | Female |
| Pitch (mm) | 2,54 |
| Mating pin size (range) | ø 0,40-0,56, sq. 0,25x0,45 |
| No of contacts | 24 |
| Row distance (code) | 300 mil |
| Contact type | **B1** - Standard B |




| | |
|---|---|
| Material contact | Copper alloy |
| Material clip | Berylium copper |
| Plating contact | Sn |
| Plating clip | Au |
| Insulator Style | With Bar |
| Material insulator | High temp. thermoplast UL94V-0 |
| Rated current | 3,0 A |
| Rated voltage | 150 $V_{RMS}$ / $V_{DC}$ |
| Withstand voltage | 1000 $V_{RMS}$ for 1 minute |
| Operating temperature | -55°C to +125°C |
| Max. processing temper. | 260°C for 10 seconds |
| Packaging | Tube |
| Cap | Without cap |
| D (Row dist. mm) | 7,62 |
| A | 30,40 |
| B | 10,10 |
| C | 4,40 |

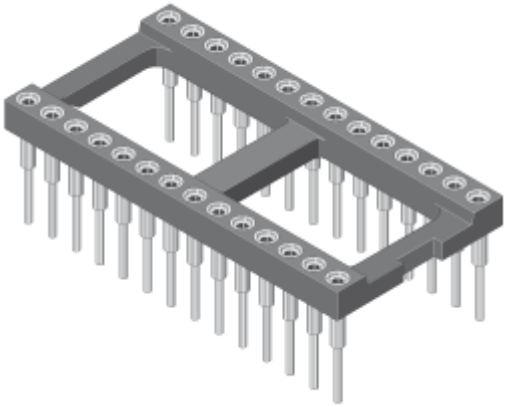



# Order code: 001-2-024-3-B1STF-XT0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

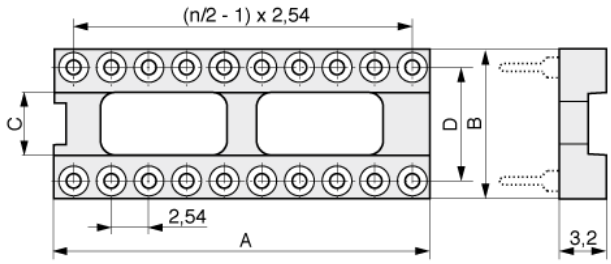
Date: 14.08.2014 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=001-2-024-3-B1STF-XT0