





电磁开关

KJD12-14 Electromagnetic Switch

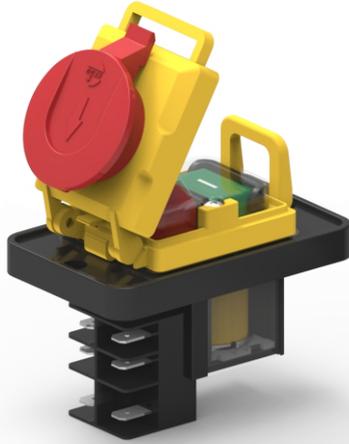

KJD12-14



KJD12-14-2

Description 描述

On/off and electric motor control with built-in under voltage and overload protection. Applicable for electrical machine tools such as electrical carpentry tools, bench drills, grinders, lathes and saws.

KJD12-14开关用于启动和控制电动机,具有欠电压保护和过载保护功能。

它适用于木工机械、台钻、砂轮机,机床,台锯,及电力拖动控制设备等。

Specifications 参数

Standard 标准	TUV (EN61058)		TUV (EN60947)	UL, CUL (UL508, E195428)		
Rated Voltage 额定电压	120V~	250V~	250V~	100 - 120V~	220 - 240V~	100 - 120/ 220 - 240V~
Rated Current 额定电流	18 (18) A	16 (12) A	18A (AC-1) 15A (AC-3)	1HP	1.5HP	16A
Coil Voltage 线圈电压	120V~; 220~240V~					
Rated Frequency 额定频率	50 / 60Hz					
Degree of Protection 防护等级	IP54					
Number of Operating Cycles 操作循环次数	5E4					
Ambient Temperature Limits 周围环境温度	T85 / 55 or T55					
Terminals 端子	Faston6.3×0.8mm 插片6.3×0.8mm					

电磁开关

KJD12-14 Electromagnetic Switch



Ordering Options 订货选项

Panel 面板	Function 功能	Coil Voltage/Frequency 线圈电压/频率	Marking on Button 按钮标识	Accessories 附件
P1 A01814 	F1 	V1 120V~/50Hz V2 120V~/60Hz V3 230V~/50Hz V4 230V~/60Hz V5 240V~/50Hz V6 240V~/60Hz	M1 M2 M3 M4 M5 M6	A1 Waterproof Cover 防水罩 A2 For Panel P2 适用于面板P2 A3 Emergency Stop Button and Waterproof Cover 急停按钮和防水罩 PL1 PL12 PL13
P2 A05099 				
P3 A05098 				
P4 A01821 				
P5 A06008 				

Reference Dimension 参考尺寸

KJD12-14/P1

KJD12-14-2/P4

