

20A 12V DC
10A 28V DC

6A 12VT



FEATURES

- * Watertight boot (R13-112-12) is optional (refer page 72).
- * For wire connector, please refer to page 70(R4-57).

UL94V-0 10A 28V DC, 6A 12VT
for A, B, C, D, L

ROCKER

A/B/B10 B/C/D E/F/G H/I	B2 B2F	A8/B8 B8F C8/D8 E8/F8
A2	B9 B9F	AP BP CP DP
A2B	L L3 LF CL/DL	
A5	LP	

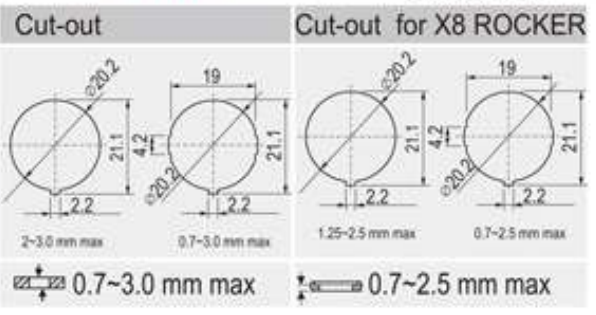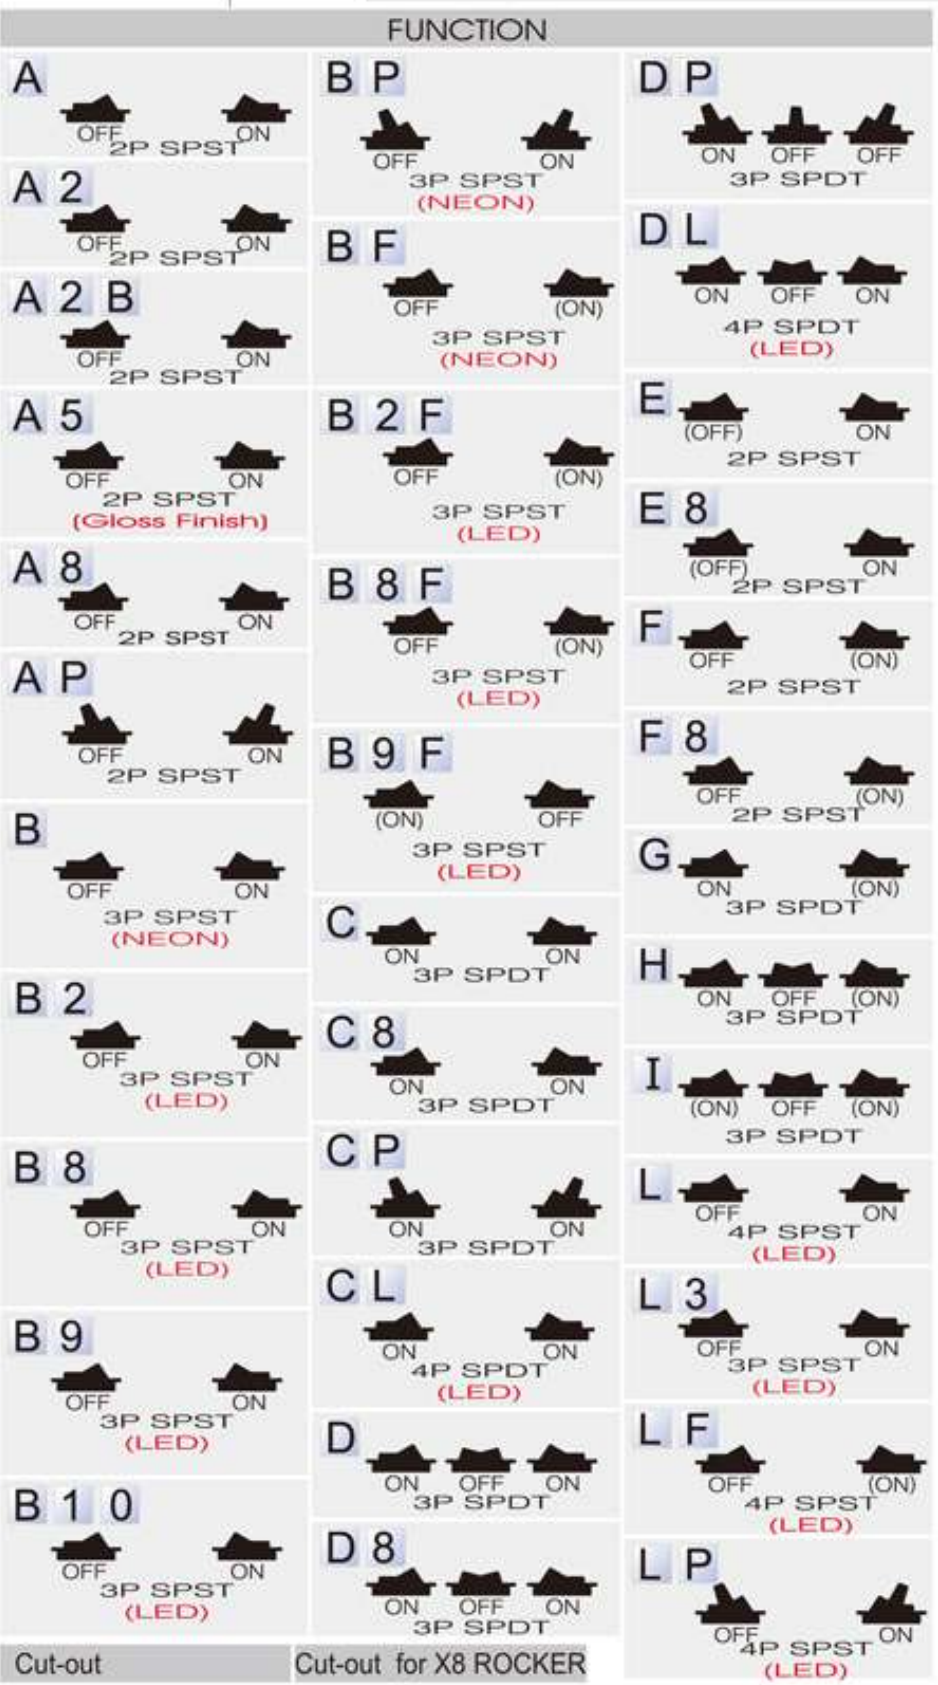

TERMINAL

0 2		.187" SQ
0 9		PC A/C/D/E/F/G/H/I
1 2		SO A/C/D/E/F/G/H/I/L