


# Burgess Standard Size Metal Cased Micro Switches

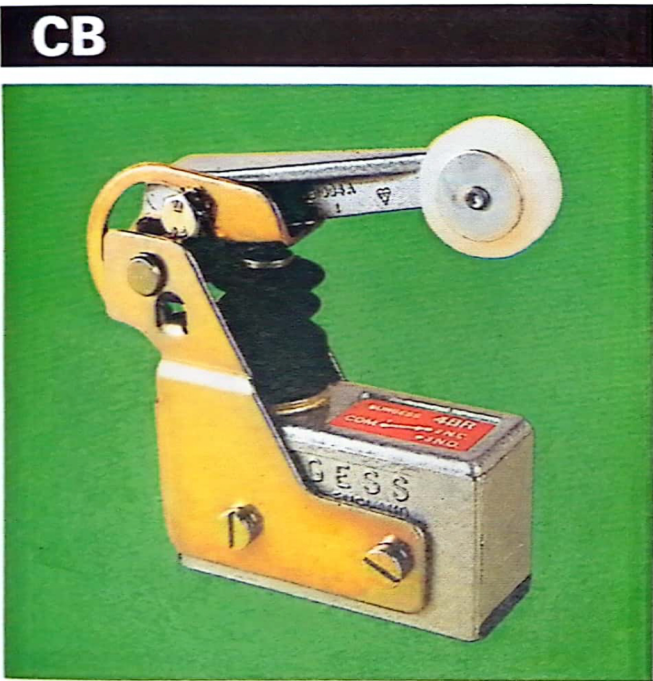

Auxiliary actuator for optional use with standard size enclosed terminal micro switches provided with cowl-protected spring plunger actuators:—

**Actuator**

3BR types listed on page 151  
4BR types listed on page 154  
Metal lever with free-running plastic roller. Adjustable through 145°. M4 hexagon head adjustment lock

**Frame**

Double plate type which straddles the switch, in plated mild steel

**Mounting**

Two 4BA screws with washers and nuts are provided. The 35 mm (1.38 in) screws are long enough not only to fix the actuator to the switch but also the complete assembly to the application

**Lever Ratio**

3.6:1

**Note** The reference CB covers the auxiliary actuator and hardware only. The switch should be ordered separately.

