


# Burgess

## V9 Series Sealed Miniature Micro Switches

Single-pole, snap-action, changeover micro switches which are sealed against the ingress of liquid and are pressure tested. Their screw terminals are arranged in a channel provided with a removable insulated cover which facilitates the running-in of sealing compound on site. Three models have metal cases and two have plastic cases, the use of the latter being recommended when insulation resistance of a high value is required. Metal cased models with factory-connected and potted wires and which carry an explosion-proof component approval are listed in the Explosion-Proof Switches section, see page 199.

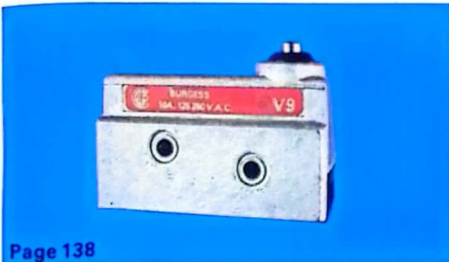

Page 138

Plunger actuator metal case



Page 138

Roller-lever actuator metal case



Page 138

Plain lever actuator metal case



Page 139

Plunger actuator nylon case



Page 139

Roller-lever actuator nylon case



Page 139

Insulated cable box

Individual descriptions of these switches appear on the pages shown.

### Construction

#### Mechanism

Single-pole, snap-action, using a coil spring as an energy store. Changeover working, with normally open only or normally closed only working available. The moving contact is silver and the fixed contacts are silver cadmium oxide.

#### Enclosure

Either a metal or plastic. Insulation and base cover plate in plastic. Synthetic rubber plunger cowl.

#### Actuators

Integral levers in stainless steel. Roller in plastic.

#### Terminals

Three 6 BA screws with captive washers are located in stepped channels able to accommodate single-core cables up to 3 mm outside diameter.

### Electrical Ratings

Ratings are recommended maxima and are in amperes.


Voltage	Resistive Load	Tungsten Lamp Load		Inductive Load
		NC	NO	
AC				
125	10	2	1	10
250	10	1.5	1	10
DC				
Up to 15	15	3	1.5	15
30	10	3	1.5	10
50	3	0.8	0.8	2.5
75	1	0.6	0.6	0.5
125	0.5	0.5	0.5	0.1
250	0.25	0.25	0.25	0.05

### Installation and Service

#### Mounting

Two side-mounting holes for M3 or #4 screws.

#### Diagram of Connections



#### Environmental Data

The mechanism enclosure is sealed and pressure tested. When terminals and wire tails are protected with a suitable approved compound the complete units conform to IEC Code IP67, NEMA Type 6. Switches with factory-attached wires – see page 199 – are supplied to this degree of protection.

#### Service

Regular checks for cleanliness and security are advocated.

### Approvals

Metal-cased models are CSA and UL Approved. Consult Burgess about plastic-cased models.

### Cross References

BASEEFA approved metal cased models with factory-fitted wires – pages 74-76 and 199.

Unsealed compact switches – pages 46 and 136-137.