

Halogen lamp double based RJH-TS 400W/230/C/XE/R7S

Logistic Data

Article No.	22315552
Code	RJH-TS 400W/230/C/XE/R7S
Product EAN	4008597155529
Customs tariff no.	85392192
Box quantity (pcs.)	20
EAN Box	4008597455520
Gross weight of box in kg	0.342
Length of box in m	0.14
Width of box in m	0.12
Height of box in m	0.08
Pieces per palette	28800
ETIM class	EC000038
ETIM class name	Mains voltage halogen lamps without reflector





Electric Parameters

Lamp nominal wattage	400 W
Rated wattage	400.0 W
Comparable Wattage incandescent lamp	500 W
Mains voltage	230 V
Lamp's nominal current	1.74 A
Power factor	1.00
Energy Consumption kWh/1000h	400

Light Application Parameters

Luminous flux	9000 lm
Rated lamp luminous flux	9000 lm
Luminous efficiency of lamp	22.5 lm/W
Colour temperature	3000 K
Colour rendering index Ra	100

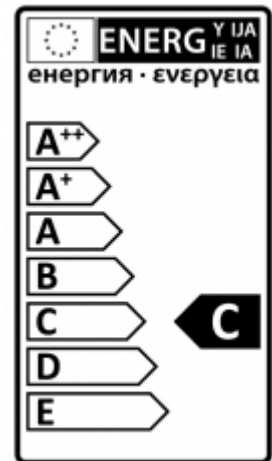

Service Life

Mean service life	2000 h
Info about service life	3B50, 50Hz
No. switching cycles	50000

Specification

Diameter max.	12 mm
Length max.	114.2 mm
Contact distance	114.2 mm
Lamp dimmable	Yes
dimmable	ja
Energylabel from 2013	C
Ignition time	0 s
Mercury content	0.0 mg
Base	R7s
Lamp shape	Tube, two bases
Design	clear

Notes on Operation

recommended lead fuse	4 A
Burning position	any

Miscellaneous

EU Directive	DIM1
ILCOS name	HDG/C/UB-400-230-R7s-114,2
LBS name	QT-DE12 400W R7s


Notes:

Mains voltage halogen lamp EcoPlus; shockproof due to pinching technology.
Do not touch lamp bulb with bare fingers.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.
The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes

Base




R7s
IEC/EN 60061-1
sheet 7004-92A-4

Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

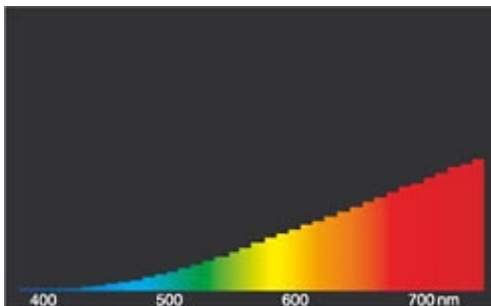

light of incandescent lamps

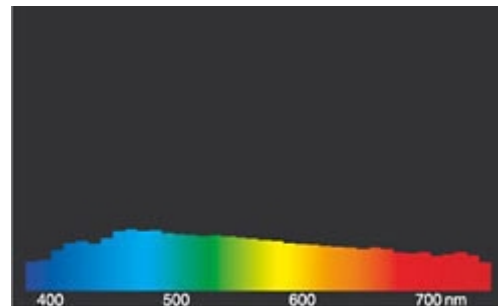

daylight(D 65)

Special features

With a simple change from standard halogen lamps to innovative Xenon technology you can save up to 30% energy.

General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages. Subject to change without notice. Errors and omissions excepted. ® = Registered trademark

All technical data without guarantee.