


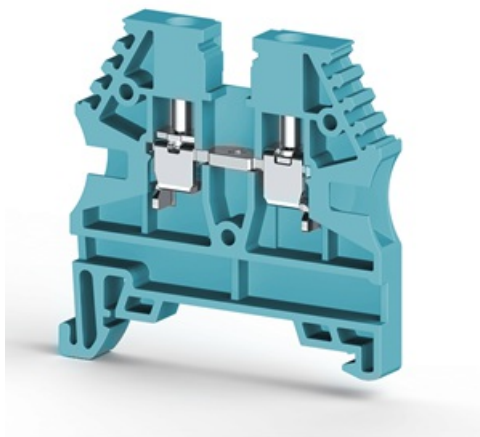

Klemmsan®

304121 AVK 2,5

2,5mm²,screw type,single deck feed through terminal block,Insulation material PA,Blue

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	100
	Weight (g)	
Dimensions	Width	5 mm
	Length	44.2 mm
	Height (MR 32)	— mm
	Height (MR 35x7.5)	44.5 mm
TSE / CE Technical Data	Nominal Voltage	750 V ~
	Nominal Current	24 A
	Cross Section	2.5 mm ²
	Norm	EN 60947-7-1
VDE Technical Data	Nominal Voltage	750 V ~
	Nominal Current	24 A
	Cross Section	2.5 mm ²
	VDE Norm	IEC 60947-7-1
UL / CSA Technical Data	Nominal Voltage	600 V ~
	Nominal Current	20 A
	Cross Section	AWG/26-12
ATEX Technical Data	Nominal Voltage	630 V ~
	Nominal Current	21 A
	Cross Section	2.5
Connection Data	Minimum solid strand cross section	0.5 mm ²

	Maximum solid Strand cross section	4 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	2.5 mm ²
	AWG Conductor Range	26-12
	Connection Type	screw/vidalı
	Insulation Stripping length	10 mm
	Tightening torque	0.4 Nm

Mounting Rails



●
35x15, Slotted

MR 35x15-MR



●
MR 35x15 (1 m.)-MR 35x15 (1 m.) Non-Slotted



●
35x7,5 - Slotted

MR 35x7,5-MR



●
35x7,5 Slotted

MR 35x7,5-MR



●
MR 35x7,5 (1 m.)-MR 35x7,5 (1 m.) Non-Slotted



●
MR 35x7,5 (2 m.)-MR 35x7,5 (2 m.) Non-Slotted