


94.74

Approvals
(according to type):




94.82

Approvals
(according to type):



Screw terminal (Plate clamp) socket panel or 35 mm (EN 60715) rail mount	94.72 Blue	94.72.0 Black	94.73 Blue	94.73.0 Black	94.74 Blue	94.74.0 Black
For relay type	55.32		55.33		55.32, 55.34	
Accessories						
Metal retaining clip (supplied with socket - packaging code SMA)					094.71	
Modules (see table below)					99.01	
Screw terminal (Plate clamp) socket: panel or 35 mm rail mount	94.82 (blue)		94.82.0 (black)			
For relay type	55.32				55.32	
Accessories						
Metal retaining clip (supplied with socket - packaging code SMA)					094.71	
Modules (see table below)					99.01	
Technical data						
Rated values	10 A - 250 V					
Dielectric strength	2 kV AC					
Protection category	IP 20					
Ambient temperature	°C -40...+70					
⊕ Screw torque	Nm 0.5					
Wire strip length	mm 8 (94.72/73/74)		9 (94.82)			
Max. wire size for 94.72/73/74 and 94.82 sockets	solid wire		stranded wire			
	mm ² 1x2.5 / 2x1.5		1x2.5 / 2x1.5			
	AWG 1x14 / 2x16		1x14 / 2x16			

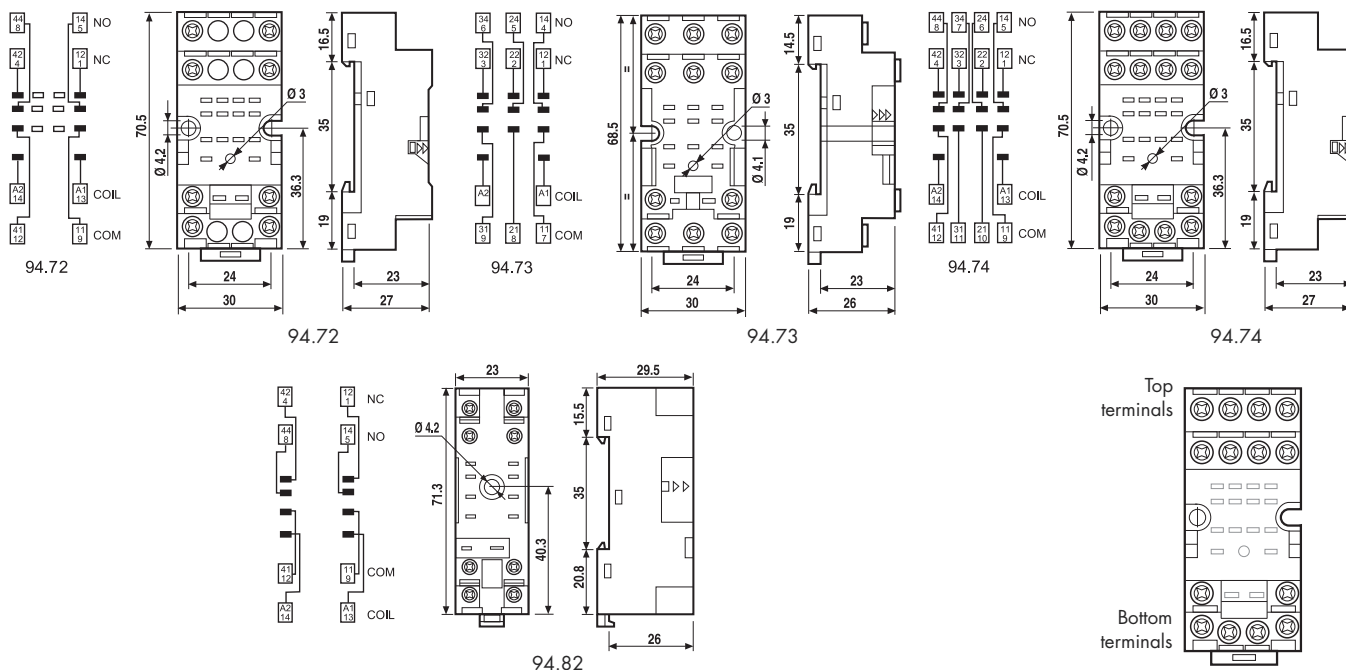

99.01

Approvals
(according to type):



* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

99.01 coil indication and EMC suppression modules for 94.72, 94.73, 94.74 and 94.82 sockets			Blue*
Diode (+A1, standard polarity)	(6...220)V DC	99.01.3.000.00	
Diode (+A2, non standard polarity)	(6...220)V DC	99.01.2.000.00	
LED	(6...24)V DC/AC	99.01.0.024.59	
LED	(28...60)V DC/AC	99.01.0.060.59	
LED	(110...240)V DC/AC	99.01.0.230.59	
LED + Diode (+A1, standard polarity)	(6...24)V DC	99.01.9.024.99	
LED + Diode (+A1, standard polarity)	(28...60)V DC	99.01.9.060.99	
LED + Diode (+A1, standard polarity)	(110...220)V DC	99.01.9.220.99	
LED + Diode (+A2, non standard polarity)	(6...24)V DC	99.01.9.024.79	
LED + Diode (+A2, non standard polarity)	(28...60)V DC	99.01.9.060.79	
LED + Diode (+A2, non standard polarity)	(110...220)V DC	99.01.9.220.79	
LED + Varistor	(6...24)V DC/AC	99.01.0.024.98	
LED + Varistor	(28...60)V DC/AC	99.01.0.060.98	
LED + Varistor	(110...240)V DC/AC	99.01.0.230.98	
RC circuit	(6...24)V DC/AC	99.01.0.024.09	
RC circuit	(28...60)V DC/AC	99.01.0.060.09	
RC circuit	(110...240)V DC/AC	99.01.0.230.09	
Residual current by-pass	(110...240)V AC	99.01.8.230.07	