


95.95.3

Approvals
(according to type):




095.91.3



060.72


Screw (Box clamp) terminal socket panel or 35 mm rail mount		95.93.3 (blue)	95.93.30 (black)	95.95.3 (blue)	95.95.30 (black)
For relay type		40.31		40.51, 40.52, 40.61	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip		095.91.3	095.91.30	095.91.3	095.91.30
8-way jumper link		095.08	095.08.0	095.08	095.08.0
Identification tag		095.80.3			
Modules (see table below)		99.80			
Sheet of marker tags for retaining and release clip 095.91.3 plastic, 72 tags, 6x12 mm		060.72			
Technical data					
Rated values		10 A - 250 V *			
Dielectric strength		6 kV (1.2/50 µs) between coil and contacts			
Protection category		IP 20			
Ambient temperature		°C -40...+70			
Screw torque		Nm	0.5		
Wire strip length		mm	8		
Max. wire size for 95.93.3 and 95.95.3 sockets			solid wire	stranded wire	
		m ²	1x6 / 2x2.5	1x4 / 2x2.5	
		AWG	1x10 / 2x14	1x12 / 2x14	

* For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

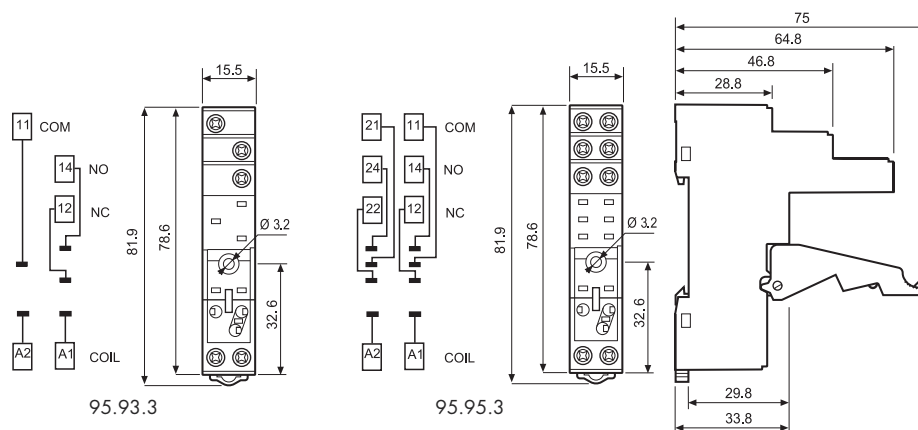

095.08

8-way jumper link for 95.93.3 and 95.95.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	

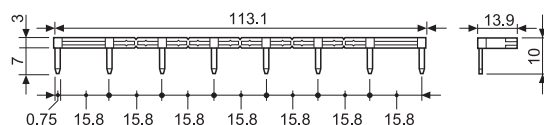

99.80

Approvals
(according to type):



* Modules in Black housing are available on request.

Green LED is standard.
Red LED available on request.

99.80 coil indication and EMC suppression modules for 95.93.3 and 95.95.3 sockets		Blue*
Diode (+A1, standard polarity)	(6...220)V DC	99.80.3.000.00
LED	(6...24)V DC/AC	99.80.0.024.59
LED	(28...60)V DC/AC	99.80.0.060.59
LED	(110...240)V DC/AC	99.80.0.230.59
LED + Diode (+A1, standard polarity)	(6...24)V DC	99.80.9.024.99
LED + Diode (+A1, standard polarity)	(28...60)V DC	99.80.9.060.99
LED + Diode (+A1, standard polarity)	(110...220)V DC	99.80.9.220.99
LED + Varistor	(6...24)V DC/AC	99.80.0.024.98
LED + Varistor	(28...60)V DC/AC	99.80.0.060.98
LED + Varistor	(110...240)V DC/AC	99.80.0.230.98
RC circuit	(6...24)V DC/AC	99.80.0.024.09
RC circuit	(28...60)V DC/AC	99.80.0.060.09
RC circuit	(110...240)V DC/AC	99.80.0.230.09
Residual current by-pass	(110...240)V AC	99.80.8.230.07