

# POWER RELAY

## 1 POLE - 5A/10A Medium Load Control

### JV Series

#### ■ FEATURES

- UL, CSA, VDE, SEMKO, CQC recognized
  - UL class B (130°C) wire class
  - Low profile and space saving
    - Height: 12.5 mm
    - Mounting space: 175 mm<sup>2</sup>
  - High sensitivity in small package
    - Operating power: 0.112 to 0.13 W
    - Nominal power: 0.2 to 0.3 W
  - High insulation with reinforced insulation system (between coil and contacts)
    - Insulation distance: 8 mm
    - Dielectric strength: 5,000 VAC
    - Surge strength: 10,000 V
  - Plastic materials
    - UL94 flame class V-0 -UL CTI level class 2
  - Plastic sealed type, RTIII
  - RoHS compliant.
- Please see page 6 for more information



#### ■ PARTNUMBER INFORMATION

[Example]       $\frac{JV}{(a)}$  -  $\frac{12}{(*)}$   $\frac{S}{(b)}$  -  $\frac{K}{(c)}$   $\frac{T}{(d)}$   $\frac{S}{(e)}$

(a)	Relay type	JV	: JV Series
(b)	Coil rated voltage	12	: 3...48VDC Coil rating table at page 3
(c)	Coil rating	Nil S	: Standard type (300mW) (not for -KS type) : High sensitive type (200mW) (-KS type: 250mW)
(d)	Enclosure	K	: Plastic sealed type, RTIII
(e)	Construction	T S	: High density mounting type : High power type 10A

Note: Actual marking omits the hyphen (-) of (\*)

# JV SERIES

## ■ SPECIFICATION

Item			Standard type	High sensitive type	High power type
			JV - ( )	JV - ( ) S	JV- ( ) - KS
Contact Data	Configuration		1 form A (SPST-NO)		
	Construction		Single		
	Material		Silver alloy AgNi + Au	AgSnO <sub>2</sub> + Au	
	Resistance (Initial)		Max. 70 mOhm at 6 VDC, 1 A		
	Contact rating		5A, 250VAC / 30VDC (resistive load)	10A, 250VAC / 24VDC	
	Max. carrying current		5A	10A	
	Max. switching voltage		250VAC / 150 VDC		
	Max. switching power		1,250VA / 150W	2,500VA / 240W	
	Max. switching current		5A	10A	
	Min. switching load *		100 mA, 5 VDC		
Life	Mechanical		Min. 5 x 10 <sup>6</sup> operations		
	Electrical		Min. 100 x 10 <sup>3</sup> operations	Min. 50 x 10 <sup>3</sup> operations	
Coil Data	Rated power (at 20 °C)		300mW	200mW	250mW
	Operate power (at 20 °C)		130mW	113mW	145mW
	Operating temperature range		-40 °C to +70 °C (no frost)		
Timing Data	Operate (at nominal voltage)		Max. 8 ms (without bounce)		
	Release (at nominal voltage)		Max. 4 ms (no diode)		
Insulation	Resistance (initial)		Min 1,000MOhm at 500VDC		
	Dielectric strength	Open contacts	750VAC, 1 min.		
		Contacts to coil	5,000VAC, 1 min.		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50µs standard wave		
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.65 mm		
		Endurance	10 to 55Hz double amplitude 5 mm		
	Shock	Misoperation	Min. 100m/s <sup>2</sup> (11 ± 1ms)		
		Endurance	Min. 1,000m/s <sup>2</sup> (6 ± 1ms)		
	Weight		Approximately 4.3 g		
	Sealing		Plastic sealed RTIII		

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

Standard type (300 mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Rated Power (mW)
3	3	30	1.98	0.15	300 mW
5	5	83.3	3.3	0.25	
6	6	120	3.96	0.3	
9	9	270	5.94	0.45	
12	12	480	7.9	0.6	
24	24	1,920	15.8	1.2	
48	48	7,680	31.7	2.4	

High sensitive type (200 mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Rated Power (mW)
3	3	45	2.25	0.15	200 mW
5	5	125	3.75	0.25	
6	6	180	4.5	0.3	
9	9	405	6.75	0.45	
12	12	720	9	0.6	
18	18	1,620	13.5	0.9	
24	24	2,880	18	1.2	

Note: All values in the table are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

10A High power type (250 mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Rated Power (mW)
3	3	36	2.1	0.3	250 mW
5	5	100	3.5	0.5	
6	6	144	4.2	0.6	
9	9	324	6.3	0.9	
12	12	576	8.4	1.2	
18	18	1,296	12.6	1.8	
24	24	2,304	14.9	2.4	

Note: All values in the table are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

# JV SERIES








## SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508, UL 873	Flammability: UL 94-V0 (plastics)
	E56140	5A, 250 VAC / 30 VDC (resistive) 1/8 HP, 125VAC/250VAC
CSA	C22.2 No. 14 LR 35579	Pilot duty: C300
VDE	0435, 0631, 0700	5A, 250VAC (cos φ1), 100K 2A, 250VAC (cos φ0.4), 100K 5A, 30VDC (omsec), 100K 10A, 250VAC (cos φ1), JV-KS, 25K 10A, 30VDC (0msec), JV-KS, 100K
	40016247	







Also complies with SEMKO, CQC.

Please contact sales office when SEMKO, CQC logo marking is necessary on the cover.

## CHARACTERISTIC DATA

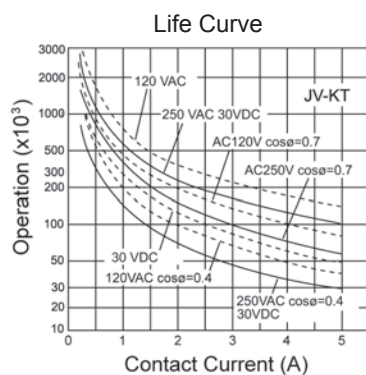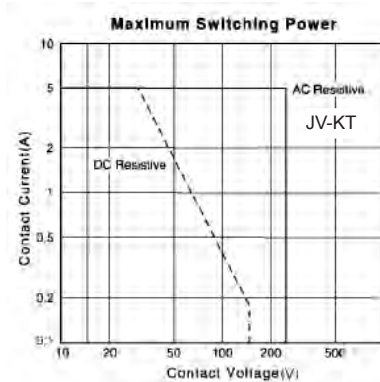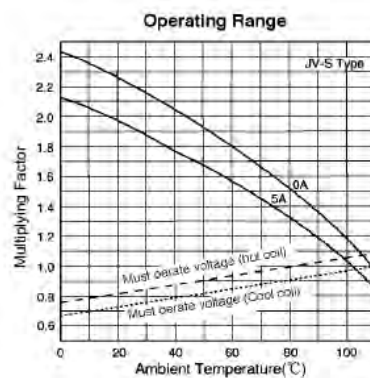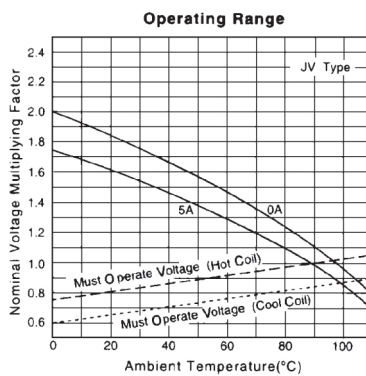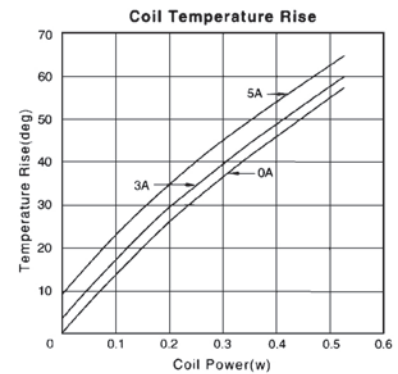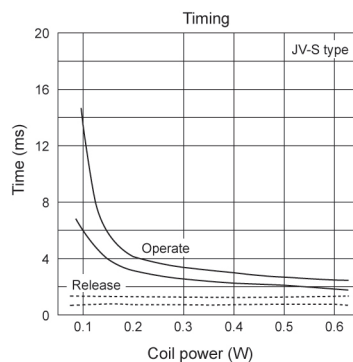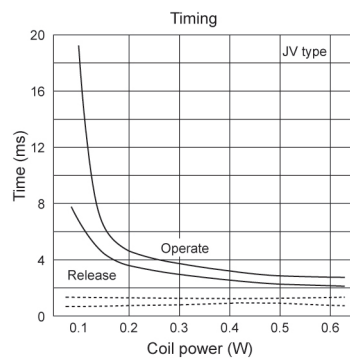


## REFERENCE DATA

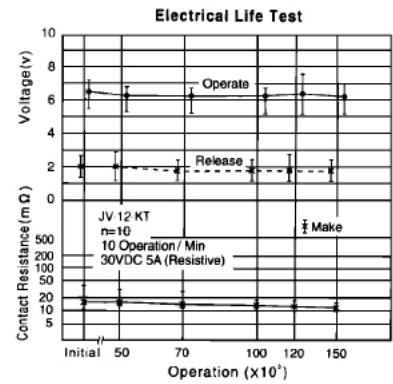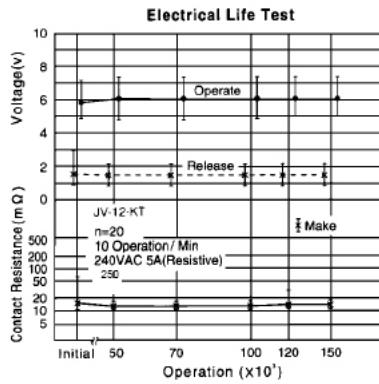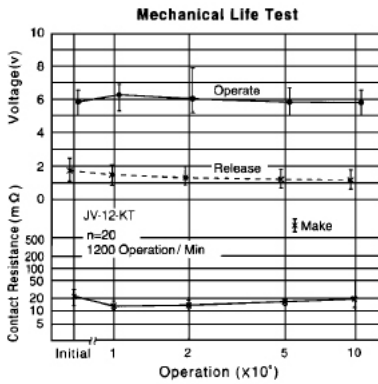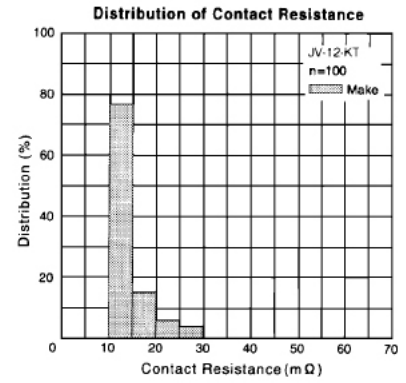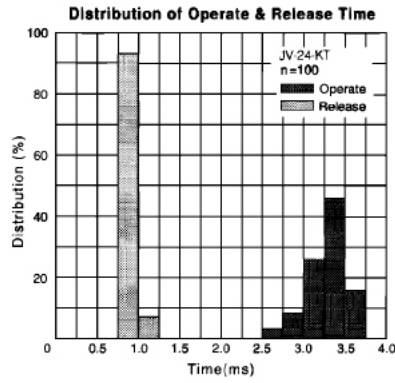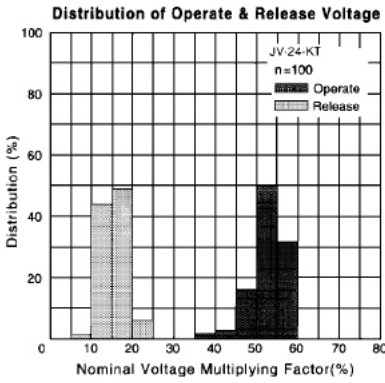


## DIMENSIONS


- Dimensions
- JV-KT type + JV-( )S-KS

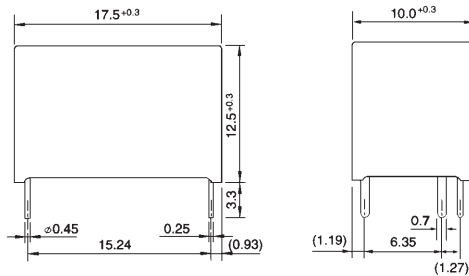

- Schematics (BOTTOM VIEW)



- PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95/EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2010 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. August 04, 2010