

## Technical data sheet

Actuator sensor interface · Network cables PROFINET

---

**Male RJ45 straight to male M12 straight with PUR cable shielded 360°  
Cat.5e, D-coded, self-locking screw connection  
C-track compatible, halogen free**



---

### Identification

Type STG4-RJ45/STG4-M12/PN PUR 1,5M  
Part No. [192013.0150](#)

---

### Product version

Datasheet version 00

---

### Technical data

Number of conductors/cross-section	(2×2×AWG22/7)
Form male 1	RJ45 male straight
Form male 2	M 12 male straight
Pole number	4
Category	Cat.5
Number of conductors	4
Cable diameter	6.5 mm
Cable length	1.5 m
Rated voltage $U_N$	DC 24 V
Operating voltage max.	50 V
Rated current	1.5 A
Test voltage type	1000 V
Insulation resistance at 20 °C	$\geq 1000 \text{ M}\Omega \times \text{km}$
Contact resistance	$< 20 \text{ m}\Omega$
Degree of protection	IP20
Coding	D
Shielding	360°
Temperature range connector	-25 °C ... +85 °C

---

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
[www.lutze.com](http://www.lutze.com) · [sales.gb@lutze.co.uk](mailto:sales.gb@lutze.co.uk)

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) · Bruckwiesenstraße 17-19 · D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 · Fax +49 (0)7151 6053-277(-288)  
[www.luetze.de](http://www.luetze.de) · [info@luetze.de](mailto:info@luetze.de)

12.07.2022 · Subject to technical modification  
Part No. [192013.0150](#) · Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

## Technical data sheet

### Actuator sensor interface · Network cables PROFINET

Temperature range fixed	-40 °C ... +80 °C
Temperature range moving	-30 °C ... +70 °C
Minimum bending radius fixed	6×D
Minimum bending radius moving	12×D
Mounting	Breakaway torque 0.4 Nm

#### Construction

Number of conductors/cross-section	(2×2×AWG22/7)
Number of conductors	4
Conductor marking	yellow · orange · white · blue
Conductor insulation	TPE-O
Jacket material	PUR
Jacket color	green RAL 6018

#### General

Housing material	TPU, PA
Color of the housing	black
Contact material	CuSn, gold-plated
Thread material	Zinc die-casting, nickel-plated
Mounting	Breakaway torque 0.4 Nm
Weight/unit	0.113 kg
PU (units)	1
Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

#### Equipment/Spare parts


##### Accessories

**Torque setting tool M 12:** Part-No. 490091 | DM-SET M12 | PU: 1 unit

#### Dimensions



#### Pin layout

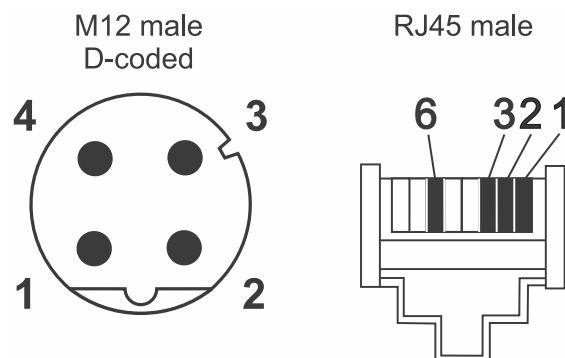

## Technical data sheet

### Actuator sensor interface · Network cables PROFINET

#### Circuit diagram

