

Technical data sheet

EMC Accessories · Grounding Device

Grounding strip, copper braiding, tin-plated
Single wire Cu ETP UNI 5649-71, similar to DIN 72333



Identification

Type	EMVMB 16/500/8
Part No.	346114.0010

Product version

Datasheet version	01
-------------------	----

Technical data

Length	500 mm
Cross-section surface	16 mm ²
Ampacity	120 A

Connecting lead

Description	both ends drilled, cold pressed
-------------	---------------------------------

Construction

Wire conductors	0.15 mm ²
-----------------	----------------------

General

Operation temperature range	+5 °C ... +105 °C
Storage temperature range	-30 °C ... +90 °C
Weight	0.16 kg/m
PU (units)	10

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) · Bruckwiesenstraße 17-19 · D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 · Fax +49 (0)7151 6053-277(-288)
www.luetze.de · info@luetze.de

22.09.2023 · Subject to technical modification

Part No. [346114.0010](#) · Datasheet version: 01

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

EMC Accessories · Grounding Device

Notes and Comments

Comments

D = hole diameter

A = sleeve length

B = width


L = distance of hole

Other lengths are available upon request

Explanation

A	25 mm
B	15 mm
D	8.5 mm
L	500 mm

Dimensions

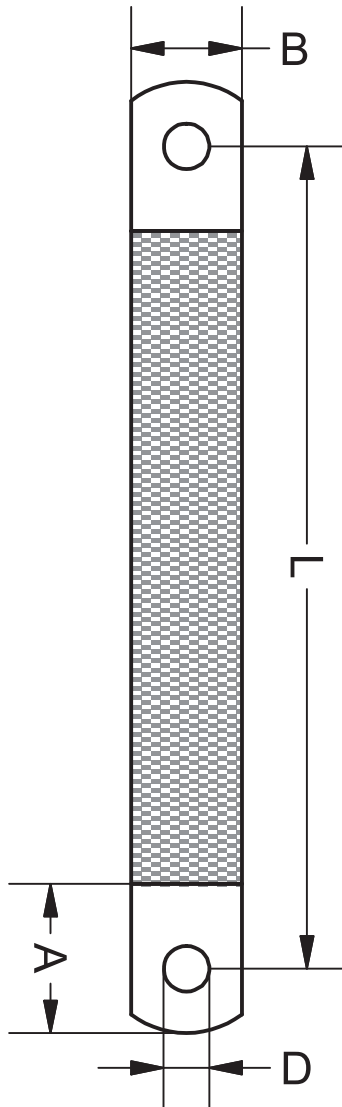

Use

