

Technical data sheet

Actuator sensor interface · Network cables PROFINET

Male M12 straight with PUR cable, shielded 360°, open end
Cat.5e, D-coded, self-locking screw connection
C-track compatible, halogen free



Identification

Type STG4-M12/PN 15M-PUR
Part No. [475300.1500](#)

Product version

Datasheet version 00

General

Design	M 12×1
Form male 1	M 12 male straight
Form male 2	line end open
Rated insulation voltage	250 V
Test voltage	1500 V
Degree of pollution	3
Insulation resistance	>1000 MΩ
Contact resistance	<5 mΩ
Degree of protection	IP65/67
Housing material	TPU
Color of the housing	black
Contact material	CuSn, gold-plated
Thread material	Zinc die-casting, nickel-plated
Mounting	Breakaway torque 0.4 Nm
Number of conductors/cross-section	1 × 4 × AWG 22/7
Number of conductors	4
Jacket material	PUR
Jacket color	green RAL 6018

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) · Bruckwiesenstraße 17-19 · D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 · Fax +49 (0)7151 6053-277(-288)
www.luetze.de · info@luetze.de

Technical data sheet

Actuator sensor interface · Network cables PROFINET

Conductor insulation	PO
Cable diameter	6.5 mm
Minimum bending radius moving	12×D
Storage temperature range	-40 °C ... +90 °C
Temperature range connector	-25 °C ... +90 °C
Temperature range fixed	-40 °C ... +70 °C
Temperature range moving	-30 °C ... +70 °C
C-track chain properties	Type B
Weight/unit	0.917 kg
PU (units)	1

Technical data


Rated voltage U_N	AC/DC 24 V
Operating voltage max.	60 V
Rated current	4 A
Pole number	4
Cable length	15 m
Coding	D
Shielding	360°

Equipment/Spare parts


Accessories

Torque setting tool M 12: Part-No. 490091 | DM-SET M12 | PU: 1 unit

Dimensions

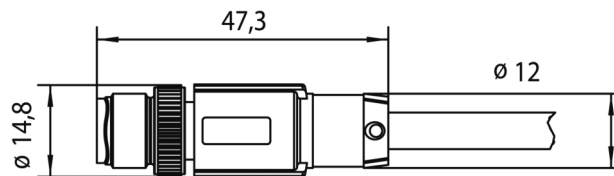

Pin layout



Technical data sheet

Actuator sensor interface · Network cables PROFINET

Circuit diagram

