



MB SERIES

SINGLE PHASE BRIDGE

Power Modules

Features

- Universal, 3 way terminals:
push-on, wrap around or solder
- High thermal conductivity package,
electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- UL E 62320 approved
- Nickel plated terminals solderable as per MIL-STD-202 Method
208; solder: Sn/Pb (60/40); solder temperature: 235-260°C
max. time: 8-10 secs

25 A
35 A

Description

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

Major Ratings and Characteristics

Parameters	26MB-A	36MB-A	Units
I _O @ T _C	25	35	A
I _{FSM} @ 50Hz	400	475	A
@ 60Hz	420	500	A
I ² t @ 50Hz	790	1130	A ² s
@ 60Hz	725	1030	A ² s
V _{RRM} range	200 to 1200		V
T _J	-55 to 150		°C

MB Series

Bulletin I2715 rev. I 03/03

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_j max.
26MB..A 36MB..A	20	200	275	2
	40	400	500	
	60	600	725	
	80	800	900	
	100	1000	1100	
	120	1200	1300	

Forward Conduction

Parameters	26MB-A	36MB-A	Units	Conditions				
I_o Maximum DC output current @ Case temperature	25	35	A	Resistive or inductive load		Initial $T_j = T_{j\max}$.		
	20	28	A	Capacitive load				
	65	60	°C					
I_{FSM} Maximum peak, one-cycle non-repetitive forward current	400	475	A	$t = 10ms$				
	420	500		$t = 8.3ms$				
	335	400		$t = 10ms$				
	350	420		$t = 8.3ms$				
I^2t Maximum I^2t for fusing	790	1130	A ² s	$t = 10ms$				
	725	1030		$t = 8.3ms$				
	560	800		$t = 10ms$				
	512	730		$t = 8.3ms$				
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	5.6	11.3	KA ² /s	$I^2\sqrt{t}$ for time $t_x = I^2\sqrt{t} \times \sqrt{t_x}$; $0.1 \leq t_x \leq 10ms$, $V_{RRM} = 0V$				
$V_{F(TO)1}$ Low-level of threshold voltage	0.76	0.79	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_j max.				
$V_{F(TO)2}$ High-level of threshold voltage	0.92	0.96		$(I > \pi \times I_{F(AV)})$, @ T_j max.				
r_{f1} Low-level forward slope resistance	6.8	5.8	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_j max.				
r_{f2} High-level forward slope resistance	5.0	4.5		$(I > \pi \times I_{F(AV)})$, @ T_j max.				
V_{FM} Maximum forward voltage drop	1.11	1.14	V	$T_j = 25^\circ C$, $I_{FM} = 40A_{PK}$ (26MB) $T_j = 25^\circ C$, $I_{FM} = 55A_{PK}$ (36MB)				
I_{RRM} Max. DC reverse current	10	10	µA	$T_j = 25^\circ C$, per diode at V_{RRM}				
V_{INS} RMS isolation voltage base plate	2700	2700	V	$f = 50Hz, t = 1s$				


Thermal and Mechanical Specifications

Parameters	26MB-A	36MB-A	Units	Conditions
T _J Junction temperature range	-55 to 150 °C			
T _{stg} Storage temperature range	-55 to 150 °C			
R _{thJC} Max. thermal resistance junction to case	1.7	1.2	K/W	Per bridge
R _{thCS} Max. thermal resistance, case to heatsink	0.2		K/W	Mounting surface, smooth, flat and greased
wt Approximate weight	20		g	
T Mounting Torque ±10%	2.0	Nm		Bridge to heatsink

Ordering Information Table

Device Code	
36	MB
1	120
2	A
3	
4	
1	- Current rating code: _____ 26 = 25A (Avg) 36 = 35A (Avg)
2	- Circuit configuration: MB = Single phase european coding
3	- Voltage code: MB series = code x 10 = V _{RRM}
4	- Diode bridge rectifier: A = 26MB, 36MB Series

Outline Table

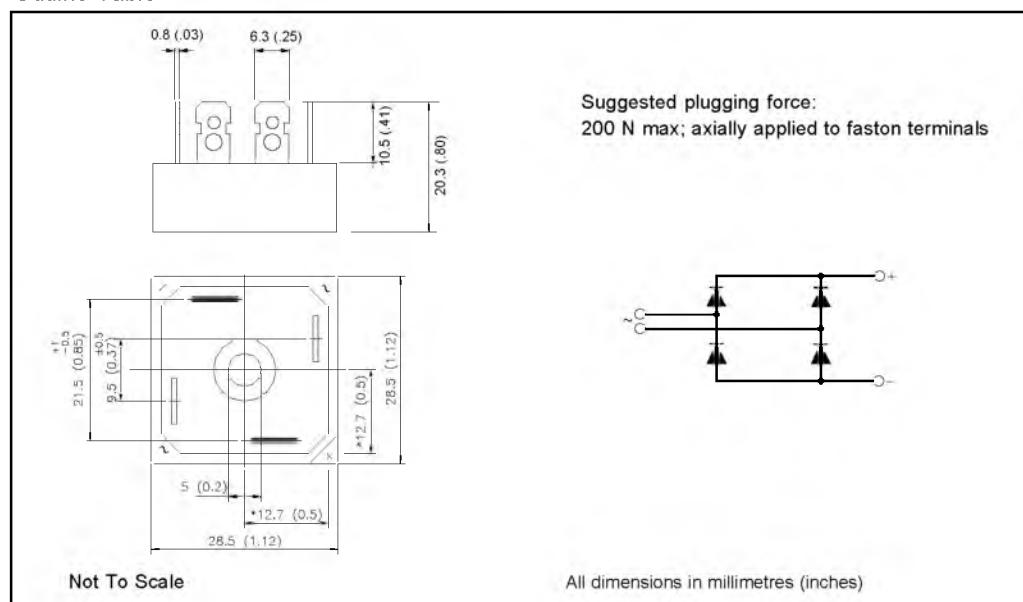

MB Series

Bulletin I2715 rev. I 03/03

International
IR Rectifier

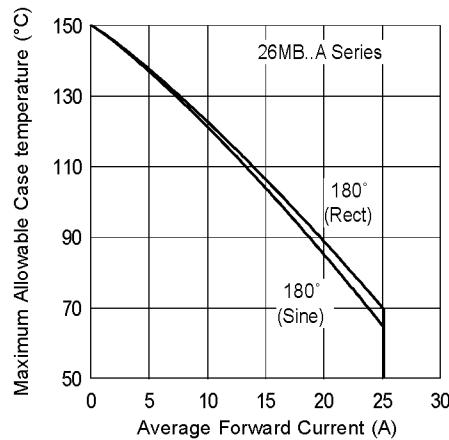


Fig. 1 - Current Ratings Characteristics

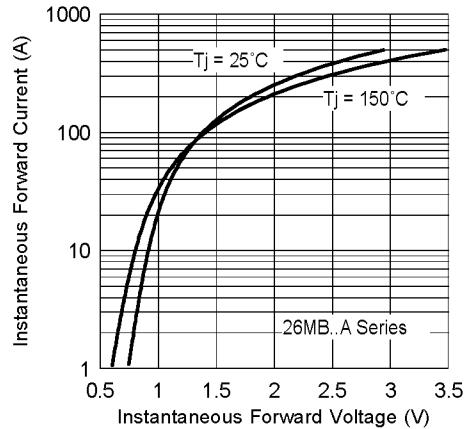


Fig. 2 - Forward Voltage Drop Characteristics
Maximum Allowable Ambient T_e

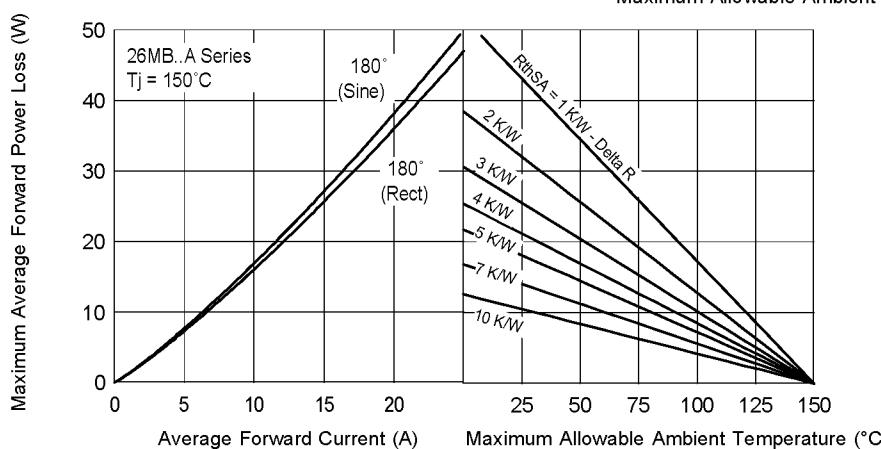


Fig. 3 - Total Power Loss Characteristics

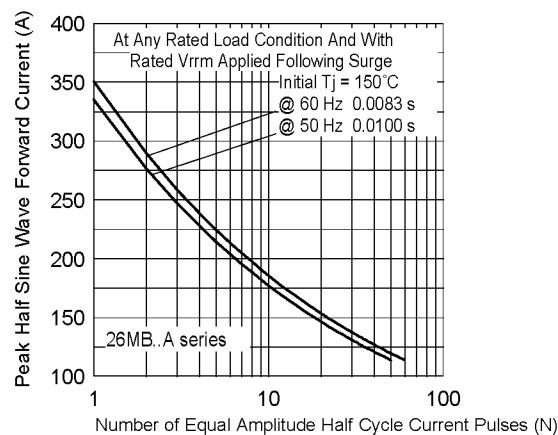


Fig. 4 - Maximum Non-Repetitive Surge Current

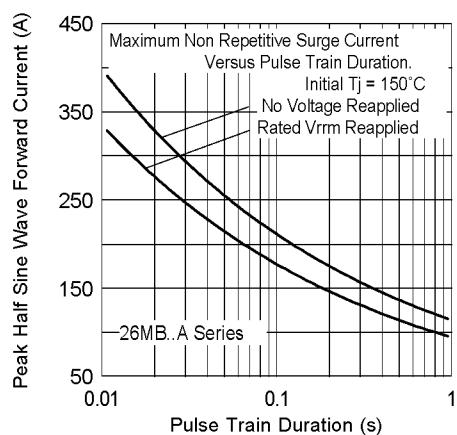


Fig. 5 - Maximum Non-Repetitive Surge Current

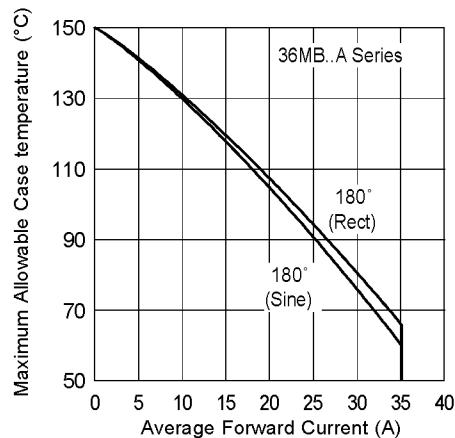


Fig. 6 - Current Ratings Characteristics

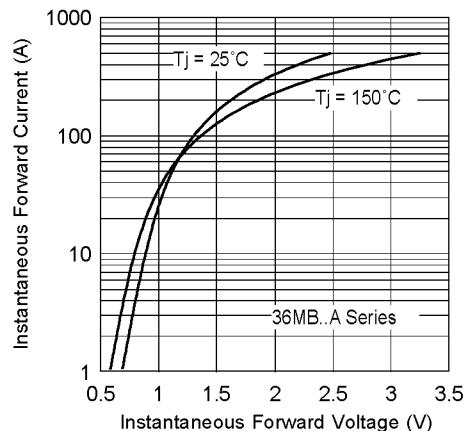


Fig. 7 - Forward Voltage Drop Characteristics

Maximum Allowable Ambient Te

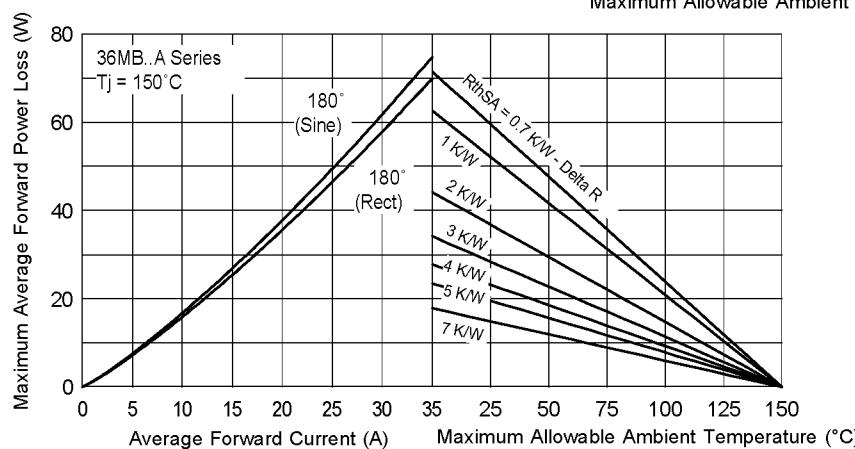


Fig. 3 - Total Power Loss Characteristics

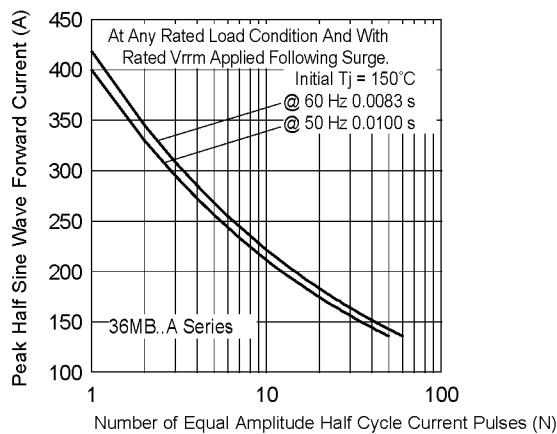


Fig. 9 - Maximum Non-Repetitive Surge Current

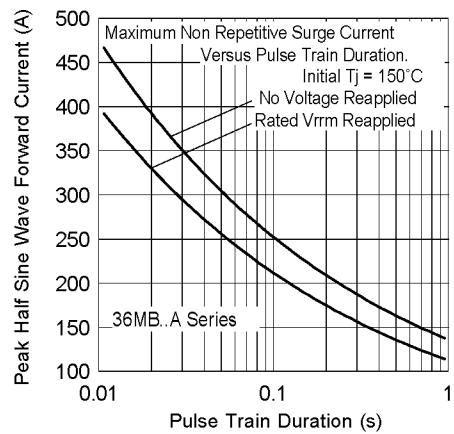


Fig. 10 - Maximum Non-Repetitive Surge Current

MB Series

Bulletin I2715 rev. I 03/03

**International
IR Rectifier**

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial and Consumer Level.
Qualification Standards can be found on IR's Web site.

**International
IR Rectifier**

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/03