


Fluorescent lamp Bonalux®

NL-T5 35W/840/G5

Radium

Product Datasheet Date: 22.08.2022

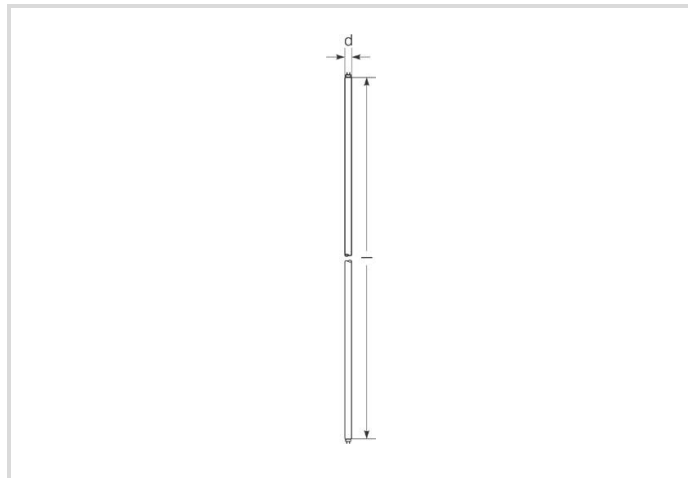

A+



F



3320



4000K




24 000h



Dimmable

General Data

Article No.	31114257
Code	NL-T5 35W/840/G5
Product EAN	4008597142574
Customs tariff no.	85393110
Box quantity (pcs.)	20
EAN Box	4008597442575
Gross weight of box in kg	3.165
Length of box in m	1.51
Width of box in m	0.102
Height of box in m	0.085
ETIM class	EC000108
ETIM class name	Fluorescent lamp
Product status	 Phase Out

Electric Parameters

Rated wattage	35.5 W
Lamp nominal wattage	35 W
Weighted energy consumption in 1,000 hours	40 kWh

Electric Parameters

Mains voltage	230 V
Nominal current (mA)	175 mA
dimnable	Yes

Light Application Parameters

Luminous flux	3320 lm
Rated lamp luminous flux	3320 lm
Luminous flux nominal	3320 lm
max. luminous flux	3650 lm
max. luminous flux at	35 °C
Beam angle	360 °
Luminous efficiency	102.82 lm/W
Radium light colour	white
Code of light color	840
Colour temperature	4000 K
Color rendering index Ra	80-89
Mean luminance	1.7
Lumen maintenance at 2000h	0.95
Lumen maintenance at 4000h	0.93
Lumen maintenance at 6000h	0.92
Lumen maintenance at 8000h	0.90
Lumen maintenance at 12000h	0.90
Lumen maintenance at 16000h	0.90
Lumen maintenance at 20000h	0.89

Service Life

Average nominal lifespan	24000 h
Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.99
Lamp survival factor at 6000h	0.99
Lamp survival factor at 8000h	0.99
Lamp survival factor at 12000h	0.99
Lamp survival factor at 16000h	0.97
Lamp survival factor at 20000h	0.85

Fluorescent lamp Bonalux®

NL-T5 35W/840/G5

Radium

Specification

Energy Label A to G	F
Energylabel A++ to E	A+
Diameter max.	16 mm
Tube diameter	16 mm
Length max.	1449 mm
Length	1449 mm
Mercury content	1.5 mg
Lamp shape	Rod
Base	G5
Colour	White

Miscellaneous

EU-date of phase-out	25.08.2023
EU Directive	RoHS

Notes

Fluorescent lamp HE T5-16mm diameter, light colour 840, high luminous efficiency, good colour rendering, long life, base G5. Controllable by Dim-ECG.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base




G5
IEC/EN 60061-1
sheet 7004-52-5

Spectrum


Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

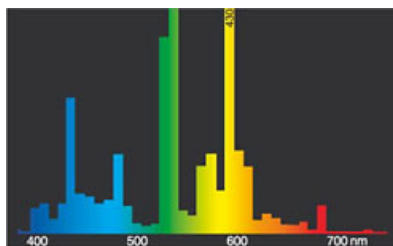

light colour 840 Spectralux® white (21)

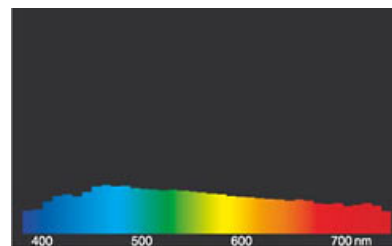

daylight(D 65)

Special features

Fluorescent lamp Bonalux®

NL-T5 35W/840/G5

Radium



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.