
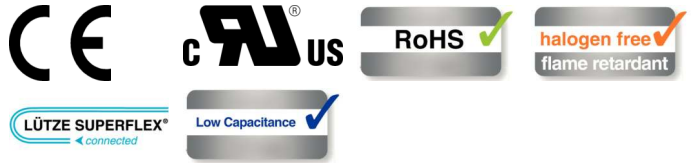


Technical data sheet

PUR electronic cables · C-track compatible · Shielded

LÜTZE SUPERFLEX® TRONIC (C) PUR TP
Shielded electronic cable UL recognized, paired
For highest requirements

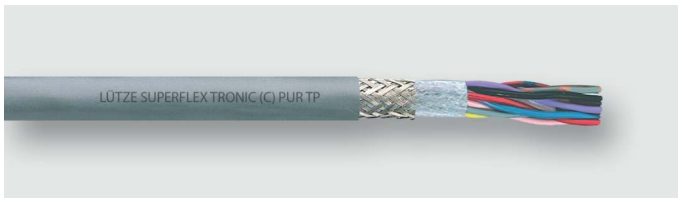

Identification

Type SU TR (C) PUR TP (5×2×0,25)
Part No. [117173](#)

Product version

Datasheet version 00

Use/Application/Properties

- Application
- C-track as well as everywhere where signals are transmitted to continuously moving system or machine parts
 - Machine and device construction, transport and conveyor technology, heating and climate technology
 - In dry and damp rooms
 - As monitoring, measurement and control cable for continuous bending loads
 - Especially for industrial environments with high EMI potential in machine, plant and device construction
- Properties
- High active and passive interference resistance (EMC)
 - High crosstalk attenuation through paired stranding
 - Braided shield optimised for continuous flexing use
 - Low capacitance, very good electrical properties
 - Flame-retardant, self-extinguishing
 - Halogen-free, no corrosive gases
 - Very good alternating bending strength
 - Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
 - Hydrolysis-resistant, microbe-resistant, and rot-resistant
 - industrial- and salt water resistant
 - Excellent coolant and lubricant resistance
 - Largely resistant to oils, greases, alcohol-free benzines and kerosene
 - Silicone free
 - RoHS compliant

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) · Bruckwiesenstraße 17-19 · D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 · Fax +49 (0)7151 6053-277(-288)
www.luetze.de · info@luetze.de

23.03.2022 · Subject to technical modification

Part No. [117173](#) · Datasheet version: 00

page 1 of 3

Technical data sheet

PUR electronic cables · C-track compatible · Shielded

Construction

Description	SUPERFLEX® TRONIC (C) PUR TP
Number of conductors/cross-section	(5×2×0.25)
Number of conductors	10
Cross-section, metric	0.25 mm ²
Cross-section AWG	AWG 24
Jacket material	PUR
Jacket color	grey RAL 7001
Outer Ø	7.7 mm
Outer Ø	0.303 inch
Surface	adhesion-free, matte
Weight	7.3 kg/100 m
Weight	67.7 Lbs/Mft
Cu-Index	4 kg/100 m
Cu-Index	27 Lbs/Mft

Construction Element 1

Element construction	(5 × 2 × 0.25)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 class 6
Conductor marking	Color coded
Conductor marking standard	DIN 47100
Conductor insulation	Special TPE

Overall construction

Overall stranding	stranded pairs layer pitch optimised conductors twisted without mechanical stress
Overall wrapping	Fleece taping
Overall shield	Braid shield tinned copper wires optical cover approx. 85 %
Jacket characteristics	Flame-retardant self-extinguishing Halogen free Oil resistant grease-resistant petrol-resistant (alcohol-free) kerosene-resistant Silicone-free

Technical data

Rated voltage	300 V
Test voltage type	AC 1500 V
Temperature according to UL	80 °C

Technical data sheet

PUR electronic cables · C-track compatible · Shielded

Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	12×D
Minimum bending radius fixed	6×D
Bending cycles	≥5 Mio
Travel distance	≤20 m
Speed	≤4
Acceleration	≤5

Technical Data Element 1

Element construction	(5 × 2 × 0.25)
Insulation resistance at 20 °C	≥1000 MΩ×km

Certifications/Standards

Certifications	cURus
UL style	AWM 20549
Conformity	CE RoHS REACH
Burning behavior according to	IEC 60332-2-2 DIN EN 60332-2-2 UL 1581 UL Horizontal Flame Test UL FT2
Oil resistant according to	DIN EN 50363-10-2
Halogen free according to	IEC 60754-1 DIN EN 60754-1
UV-resistant according to	UL 1581/2556-300h

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--